VILNIAUS GEDIMINO TECHNIKOS UNIVERSITETAS

APLINKOS INŽINERIJOS FAKULTETAS

GEODEZIJOS IR KADASTRO KATEDRA

Aušra Pranskevičiūtė

SKAITMENINIŲ NUOTRAUKŲ APDOROJIMAS FOTOGRAMETRINĖMIS SISTEMOMIS

PROCESSING OF THE DIGITAL IMAGES USING PHOTOGRAMMETRY SYSTEMS

Baigiamasis magistro darbas

Geodezijos ir kartografijos studijų programa, valstybinis kodas 62410T102

Kadastro informacinių sistemų specializacija

Matavimų inžinerijos studijų kryptis

Vadovas: doc. dr. Jūratė Sužiedelytė-Visockienė

Vilnius, 2011

VILNIAUS GEDIMINO TECHNIKOS UNIVERSITETAS
APLINKOS INŽINERIJOS FAKULTETAS
GEODEZIJOS IR KADASTRO KATEDRA

TVIRTINU
Katedros vedėjas
_____
(Parašas)
Vladislovas Česlovas Aksamitauskas
(Vardas, pavardė)
_____
(Data)

Aušra Pranskevičiūtė

SKAITMENINIŲ NUOTRAUKŲ APDOROJIMAS FOTOGRAMETRINĖMIS SISTEMOMIS

PROCESSING OF THE DIGITAL IMAGES USING PHOTOGRAMMETRY SYSTEMS

Baigiamasis magistro darbas

Geodezijos ir kartografijos studijų programa, valstybinis kodas 62410T102
Kadastro informacinių sistemų specializacija
Matavimų inžinerijos studijų kryptis

Vadovas doc. dr. Jūratė Sužiedelytė-Visockienė _____ _____
(Moksl. laipsnis, vardas, pavardė) (Parašas) (Data)

Konsultantas _____ _____ _____
(Moksl. laipsnis, vardas, pavardė) (Parašas) (Data)

Vilnius, 2011

VILNIAUS GEDIMINO TECHNIKOS UNIVERSITETAS
APLINKOS INŽINERIJOS FAKULTETAS
GEODEZIJOS IR KADASTRO KATEDRA

Technologijos mokslų sritis
Matavimų inžinerijos mokslo kryptis
Matavimų inžinerijos studijų kryptis

Geodezijos ir kartografijos studijų programa, valstybinis kodas 62410T102

Kadastro informacinių sistemų specializacija

TVIRTINU
Katedros vedėjas

_____
(Parašas)
Vladislovas Česlovas Aksamitauskas
(Vardas, pavardė)
_____
(Data)

BAIGIAMOJO MAGISTRO DARBO UŽDUOTIS

2009-12-09 .....Nr. .....
Vilnius

Studentui (ei) Aušrai Pranskevičiūtei
(Vardas, pavardė)

Baigiamojo darbo tema: Skaitmeninių nuotraukų apdorojimas fotogrametrinėmis sistemomis

patvirtinta 2009 m. gruodžio 01 d. dekano potvarkiu Nr. 374ap

Baigiamojo darbo užbaigimo terminas 2011 m. birželio 01 d.

BAIGIAMOJO DARBO UŽDUOTIS:

Apdoroti skaitmenines artimų nuotolių fotonuotraukas fotogrametrinėmis sistemomis *PhotoMod* ir *Inpho*; Atlikti trianguliacijos skaičiavimus sistema *BLUH*; Atlikti skaitmeninės fotokameros *Canon EOS 1D Mark III* kalibravimą. Išanalizuoti gautus rezultatus ir pateikti apibendrinančias išvadas.

BAIGIAMOJO DARBO RENGIMO KONSULTANTAI:

.....
(Moksl. laipsnis, vardas, pavardė)

Vadovas ..... doc. dr. Jūratė Sužiedelytė-Visockienė
(Parašas) (Moksl. laipsnis, vardas, pavardė)

Užduotį gavau

……..
(Parašas)

……Aušra Pranskevičiūtė……..
(Vardas, pavardė)

……2009-12-09……..…....
(Data)

Vilniaus Gedimino technikos universiteto egzaminų sesijų ir baigiamųjų darbų rengimo bei gynimo organizavimo tvarkos aprašo 2010–2011 m. m.
6 priedas

(Baigiamojo darbo sąžiningumo deklaracijos forma)

VILNIAUS GEDIMINO TECHNIKOS UNIVERSITETAS

Aušra Pranskevičiūtė, 20053319
(Studento vardas ir pavardė, studento pažymėjimo Nr.)

Aplinkos inžinerijos
(Fakultetas)

Geodezijos ir kartografijos, KISmf-09
(Studijų programa, akademinė grupė)

BAIGIAMOJO DARBO (PROJEKTO) SĄŽININGUMO DEKLARACIJA

2011 m. birželio 01 d.
(Data)

Patvirtinu, kad mano baigiamasis darbas (projektas) tema Skaitmeninių nuotraukų apdorojimas fotogrametrinėmis sistemomis

patvirtintas 20 09 m. gruodžio 01 d. dekano potvarkiu Nr. 374ap, yra savarankiškai parašytas. Šiame darbe (projekte) pateikta medžiaga nėra plagijuota. Tiesiogiai ar netiesiogiai panaudotos kitų šaltinių citatos pažymėtos literatūros nuorodose.

Parenkant ir įvertinant medžiagą bei rengiant baigiamąjį darbą (projektą), mane konsultavo mokslininkai ir specialistai:

Mano darbo (projekto) vadovas doc. dr. Jūratė Sužiedelytė-Visockienė

Kitų asmenų indėlio į parengtą baigiamąjį darbą (projektą) nėra. Jokių įstatymų nenumatytų piniginių sumų už šį darbą niekam nesu mokėjęs(-usi).

Aušra Pranskevičiūtė

(Parašas) (Vardas ir pavardė)

ANOTACIJA

Vilniaus Gedimino technikos universitetas
Aplinkos inžinerijos fakultetas
Geodezijos ir kadastro katedra

ISBN ISSN
Egz. sk. .....
Data .....-.....-.....

Antrosios pakopos studijų **Geodezijos ir kartografijos** programos baigiamasis darbas
Pavadinimas **Skaitmeninių nuotraukų apdorojimas fotogrametrinėmis sistemomis**
Autorius **Aušra Pranskevičiūtė**
Vadovas **doc. dr. Jūratė Sužiedelytė-Visockienė**

Kalba: anglų

Anotacija

Baigiamojo magistro darbo tikslas - nustatyti, ar aerofotogrametrinėms reikmėms skirtos programinės įrangos PhotoMod ir Inpho yra tinkamos antžeminiams fotogrametriniams darbams atlikti. Taip pat, remiantis tyrimais, atliktais skirtingomis fotogrametrinėmis sistemomis, nustatyti fotonuotraukų apdorojimo darbų etapų tikslumo reikalavimus. Šiuo tikslu magistro baigiamajame darbe atliktas artimų nuotolių skaitmeninių fotonuotraukų apdorojimas PhotoMod ir Inpho fotogrametrinėmis sistemomis, kurios yra skirtos aerofotonuotraukoms, taip pat palydovinėms nuotraukoms apdoroti ir sistema BLUH, kuri naudojama artimų nuotolių fotonuotraukų trianguliacijai atlikti. Baigiamojo magistro darbo metu, naudojantis analitine fotogrametrine sistema AICON 3D Studio, atliktas skaitmeninės fotokameros Canon EOS 1D Mark III kalibravimas, o naujai gauti kameros kalibravimo parametrai įtraukti apdorojant skaitmenines fotonuotraukas. Darbo pabaigoje pateiktos išvados, atspindinčios darbo tikslus bei uždavinius. Darbą sudaro 10 dalių: įvadas, 7 skyriai, išvados, literatūros sąrašas. Darbo apimtis – 83 p. teksto be priedų, 13 iliustr., 25 lent., 42 bibliografiniai šaltiniai. Atskirai pridedami 8 darbo priedai.

Prasminiai žodžiai

Artimų nuotolių skaitmeninės fotonuotraukos; artimų nuotolių skaitmeninių fotonuotraukų apdorojimas; skaitmeninė fotogrametrinė sistema; trianguliacija; trianguliacijos tikslumas; skaitmeninės fotokameros kalibravimas.

ANNOTATION

Vilnius Gediminas Technical University
Faculty of Environmental Engineering
Department of Geodesy and Cadastre

ISBN ISSN
Egz. sk. .....
Data .....-.....-.....

Master Degree Studies **Geodesy and Cartography** study programme Final Thesis
Title **Processing of the Digital Images Using Photogrammetry Systems**
Author **Aušra Pranskevičiūtė**
Academic supervisor **Assoc Prof Dr Jūratė Sužiedelytė-Visockienė**

Thesis language:
English

Annotation

The purpose of the Master thesis is to test if the digital photogrammetric systems PhotoMod and Inpho, which are designed for aerial photogrammetry, are suitable for close range photogrammetric applications. Also, according to performed analysis, to estimate the accuracy requirements of the images processing by using different photogrammetric softwares. For this purpose the digital close-range images were processed by using above mentioned photogrammetric softwares and that same images were processed by using for close-range images designed bundle triangulation system BLUH. The digital camera Canon EOS 1D Mark III calibration procedure using analyzing photogrammetric software AICON 3D Studio was performed. The new camera‘s calibration parameters were involved to the images processing procedure. Finally, the conclusions, which reflects the purpose of the Master thesis has been listed. The Master thesis consists of 10 parts: introduction, 7 chapters, conclusions and list of literature. Work volume – 83 pages of text without appendixes, 13 illustrations, 25 charts, 42 bibliographical sources. The 8 appendixes have been added separate.

Keywords

Close-range digital images; close-range digital images processing; digital photogrammetic workstation; bundle triangulation; bundle triangulation accuracy control; the calibration procedure of a digital camera.

PROCESSING OF THE DIGITAL IMAGES USING PHOTOGRAMMETRY SYSTEMS

CONTENT

LIST OF FIGURES **9**
LIST OF TABLES **10**
INTRODUCTION **12**
1. DIGITAL PHOTOGRAMMETRIC WORKSTATIONS **14**
1.1. Development of digital photogrammetric workstations 14
1.2. Images processing work stages 16
1.3. Digital images processing accuracy control 18
2. DIGITAL PHOTOGRAMMETRIC SYSTEM *PHOTOMOD* **21**
2.1. The modules of digital photogrammetric system *PhotoMod* 21
2.2. Images processing by using photogrammetric software 29
2.3. Accuracy control of photogrammetric work stages 37
2.4. Processing of the images by using digital photogrammetric software *PhotoMod* 40
3. DIGITAL PHOTOGRAMMETRIC SYSTEM *INPHO* **47**
3.1. The components of digital photogrammetric system *Inpho* 47
3.2. Accuracy control of photogrammetric work stages 49
3.3. Processing of the images by using digital photogrammetric software *Inpho* 51
4. BUNDLE BLOCK ADJUSTMENT *BLUH* **56**
4.1. Purpose of bundle block adjustment 56
4.2. The modules of *BLUH* 58
4.3. Results of the *BLUH* processing 59
5. ANALYZING PHOTOGRAMMETRIC SOFTWARE *AICON 3D STUDIO* **63**
5.1. Purpose of *AICON 3D Studio* 63
5.2. The modules of the analyzing photogrammetric software *AICON 3D STUDIO* 63
6. CAMERA CALIBRATION **65**
6.1. The goal of a camera calibration 65
6.2. Measurements for the digital camera calibration 66
6.3. Computation of the digital camera calibration parameters 68
6.4. Results of the digital camera calibration 69

7. THE RESULTS ANALYSIS OF PROCESSED IMAGES AND THE DIGITAL CAMERA CALIBRATION PARAMETERS 71

7.1. Aerial triangulation results analysis before camera calibration 71

7.2. Aerial triangulation results analysis after camera calibration 72

7.3. Comparison of aerial triangulation results before camera calibration and after camera calibration 73

7.4. Comparison of camera calibration parameters 75

CONCLUSIONS 78

REFERENCES 80

APPENDIXES 83

Appendix 1. *PhotoMod* aerial triangulation report

Appendix 2. *Inpho* aerial triangulation statistics file of the images which are corrected from the digital camera *Canon EOS 1D Mark III* objective distortions

Appendix 3. *Inpho* aerial triangulation report of the images which are corrected from the digital camera *Canon EOS 1D Mark III* objective distortions

Appendix 4. *Inpho* aerial triangulation statistics file of the original images

Appendix 5. *Inpho* aerial triangulation report of the original images

Appendix 6. *BLUH* bundle triangulation report of the images which are corrected from the digital camera *Canon EOS 1D Mark III* objective distortions

Appendix 7. *BLUH* bundle triangulation report of the original images

Appendix 8. The programme of Republican scientific conference *"Civil Engineering and Geodesy"*

LIST OF FIGURES

Fig. 1.1. Images processing 17
Fig. 1.2. Accuracy potential of imaging and analysis systems 19
Fig. 2.1. Structure of the digital photogrammetric system *PhotoMod* 22
Fig. 2.2. Grouping of tie points in the images overlap 31
Fig. 2.3. Grouping of inter-strip tie points in the images side lap areas 31
Fig. 2.4. Three overlapping images (P915-P912-P918) 40
Fig. 2.5. Break lines of the object 45
Fig. 2.6. Orthophoto of the object 46
Fig. 3.1. *Inpho's* modules 47
Fig. 4.1. The modules of *BLUH* 58
Fig. 6.1. Test-field for the camera calibration 67
Fig. 6.2. Photo camera position 67
Fig. 6.3. Numbered targets 68

LIST OF TABLES

Table 2.1. The basic capabilities of *PhotoMod Core* 22
Table 2.1. continuation 23
Table 2.2. The main features of *PhotoMod StereoDraw* 24
Table 2.2. continuation: 25
Table 2.3. The main features of *PhotoMod Vector* 26
Table 2.4. Calculated maximum error and root mean squared error to the digital camera *Canon EOS 1D Mark III* 38
Table 2.5. Quality of measurements of GCP and tie points 38
Table 2.6. Characteristics of digital camera *Canon EOS 1D Mark III* 40
Table 2.7. Result of camera *Canon EOS 1D Mark III* calibration (2008) 41
Table 2.8. Relative orientation result 42
Table 2.9. Quality of triplets 42
Table 2.10. Residuals between adjusted coordinates and between measured coordinates in the images 43
Table 2.10. continuation: 44
Table 2.11. Residuals of measured the image points of the ground control point 45
Table 3.1. Residuals between adjusted coordinates and between measured coordinates in the images 52
Table 3.1. continuation: 53
Table 3.1. continuation (1): 54
Table 3.2. Residuals of measured the image points of the ground control point 55
Table 4.1. Residuals between adjusted coordinates and between measured coordinates in the images 59
Table 4.1. continuation: 60
Table 4.1. continuation (1): 61
Table 4.2. Residuals of measured the image points of the ground control point 62
Table. 6.1. Results of bundle block adjustment 69
Table. 6.2. The new calibration results of the digital camera *Canon EOS 1D Mark III* 69
Table. 6.2. continuation: 70
Table. 7.1. Comparison of standard deviation between adjusted and between measured points in image space 71
Table. 7.2. Bundle triangulation results 72

Table. 7.3. Comparison of standard deviation between adjusted and between measured points in the image space after camera calibration procedure..... 73
Table. 7.4. Bundle triangulation results after the camera calibration procedure..... 73
Table. 7.5. Comparison of standard deviation between adjusted and between measured points in image space before and after camera calibration..... 74
Table. 7.6. Comparison of bundle triangulation results before and after camera calibration procedure..... 74
Table. 7.7. Comparison of camera calibration parameters..... 75
Table. 7.7. continuation: 76
Table. 7.8. Camera calibration parameters in *PhotoMod, Inpho* and *BLUH*..... 77

INTRODUCTION

The main product of photogrammetry is a digital image of the object in a three-dimensional (3D) space. There are a lot of digital photogrammetric workstations (DPW) (also called *softcopy workstation* (WS)) designed for this result to be achieved (Schenk 1999). All kinds of images, like a taken from the air (from airplanes or satellites) or taken from the surface of the earth (close-range photogrammetry) can be processed by using digital photogrammetric workstations. The requirements of different photogrammetric systems can differ depending on algorithms, used for photogrammetric processing (Atkinson 2001). Therefore it is important to test capabilities and accuracy of data using more than one digital photogrammetric system.

In this Master thesis the images of the research object were taken using the digital camera *Canon EOS 1D Mark III* from the surface of the earth. These close-range digital images were processed – the triangulation procedure was done by using digital photogrammetric systems (*PhotoMod* and *Inpho*) which are suitable for above-mentioned images processing. Triangulation procedure was also performed by using the bundle triangulation program *BLUH*. The accuracy of triangulation influences the accuracy of 3D data (Sužiedelytė-Visockienė, Bručas 2009). **Thus, the aims of Master thesis are:**

- To test if the above mentioned digital photogrammetric systems for aerial photogrammetry are suitable for close-range photogrammetric applications;
- Based on the performed analysis to estimate the accuracy requirements of images processing by using different photogrammetric systems;
- To evaluate the results of 50 mm objective-lens of the digital camera *Canon EOS 1D Mark III* calibration related to the type of images of the object.

To reach the aims of the Master thesis, the followed tasks should be performed:

- The digital close-range images should be processed by using digital photogrammetric softwares *PhotoMod* and *Inpho*;
- The bundle block adjustment of the digital close-range images by using for this purpose developed system *BLUH* should be performed;
- The camera calibration procedure should be performed.

Novelty of the science:

- According to performed processing of the digital close-range images and the analysis of the results, the suitability of explored digital photogrammetric systems for aerial photogrammetry was stated;

- The optical calibration parameters of the digital camera *Canon EOS 1D Mark III* were specified.

Practical importance:

- After the close-range digital images processing by using digital photogrametric systems, which are designed for satellite images and aerial photographs processing and after processing of those same images with *BLUH* system, which are designed for close-range images triangulation, it was found that *PhotoMod* and *Inpho* softwares can be used for processing of close-range digital images. Thus, the analysis that was carried out allows the user to choose one software to perform tasks with aerial photographs, satellite images and close-range photogrammetry;
- The digital camera *Canon EOS 1D Mark III* is used for photogrammetrical fixation of heritage objects in scientific and manufacturing enterprise company *Cad and F Projektservisas*. Therefore, the qualified optical parameters of the digital camera and the analysis which was performed during research work will be useful in the further close-range photogrammetry works.

Acknowledgements

The Master thesis was performed in Lithuania and in Germany at Neubrandenburg University of Applied Sciences. Initial data for analysis (the digital images of the object) was provided by scientific-industrial company *Cad and F Projektservisas*. The images were taken with this company's digital photo camera *Canon EOS 1D Mark III* and were processed with this company's digital photogrammetric software *PhotoMod*. Thus, I would like to thank to the head of company *Cad and F Projektservisas* Dalius Čekanavičius for supplied data, technical equipment and software. Also I would like to thank to the supervisor of my Master thesis doc. Jūratė Sužiedelytė Visockienė for the help during images processing procedure by using *PhotoMod* photogrametric software. In addition I would like to thank to Neubrandenburg's University Prof. Dr.-Ing. Wolfgang Kresse for the help and given possibility to make further researches by using digital photogrammetric software *Inpho*, analyzing photogrammetric software *AICON 3D Studio* and system *Bluh* in photogrammetry laboratory at the Neubrandenburg University of Applied Sciences.

1. DIGITAL PHOTOGRAMMETRIC WORKSTATIONS

At the heart of digital images processing side is a DPWs. Thus, DPWs are the single most significant product of digital photogrammetry.

This chapter consist of a brief history of the development of DPW, discussion of digital images processing work stages and accuracy of the images processing.

1.1. Development of digital photogrammetric workstations

According to the International Society for Photogrammetry and Remote Sensing (ISPRS), a digital photogrammetric system is defined as: hardware and software designed to derive photogrammetric products from digital imagery using manual and automated techniques (Available from internet: http://www.gim-international.com)

The photogrammetrist Gülch splits the development of the digital photogrammetric workstations into three phases. The first phase began in 1955 and ended in 1981 (Schenk 1999). Perhaps the most important development in this period was the invention of the analytical stereo plotter by Helava in 1957. The analytical stereo plotter is essentially an instrument with a built-in digital computer as its main component, which handles the physical and mathematical relationship between object (ground) space and image space (Madani 2001). Shortly after the invention of the analytical plotter, its inventor, Helava, mentioned the possibility of replacing the human operator by an automatic correlator – a typical consideration of digital photogrammetry (Schenk 1999).

The first reasonably detailed concept of a DPW was described by photogrammetrist Sarjakoski in 1981. Referred to as a fully digital stereoplotter, the functionality strongly resembles that of an analytical plotter, the major difference being the fact that the photographs are replaced by digital images. Sarjakoski proposed building the digital stereplotter using image processing systems and analytical plotter software as a basis. The other photogrammetrist Case in 1982 provided another fundamental concept of a digital image exploitation system. Again, the proposed system had the functionality of an analytical plotter with the potential of automating photogrammetric task such as DEM generation (Schenk 1999).

These two design concepts paved the way for the development of DPWs from 1982 – 1988, which photogrammetrist Gülch considers the second phase in the rather short history of DPWs. Additional concepts were presented and experiments began with prototypes in different research institutions. Finally, two digital photogrammetric workstations were introduced during the XVIth ISPRS Congress in Kyoto, 1988 (Madani 2001). Major efforts were directed towards implementing hardware components and developing low-level system software. The application

software was “borrowed” from analytical plotters. The systems of that period were very much characterized by minimal functionality and performance; it is not surprising that the photogrammetric community met these first softcopy workstations with a healthy dose of skepticism. No first generation system survived (Schenk 1999).

Finally, in 1990 the third phase of DPW development began with increased activities by researchers, developers and photogrammetric societies. For example, an ISPRS working group was charged with the task of defining the functionality and performance of digital photogrammetric systems, including a critical evaluation of existing systems. The working group provided the following broad definition: “A digital photogrammetric system is defined as hardware and software to derive photogrammetric products from digital imagery using manual and automated techniques” (Schenk 1999).

From the past two decades till nowadays great strides the powerful image processing workstations has appeared. This development of DPWs is related to (Madani 2001):

• Availability of ever increasing quantities of digital images from satellite sensors, charge-coupled device (CCD) cameras and scanners;

• Availability of fast and powerful workstations/computers with many innovative and reliable hightech peripherals, such as storage devices, true color monitors, fast data transfer, and compression/decompression techniques;

• Integration of all types of data in a unified and comprehensive information system such as geographic information systems (GIS);

• Real-time applications such a quality control and robotics;

• Computer aided design (CAD) and industrial applications;

• Lack of trained and experienced photogrammetric operators and high cost of photogrammetric instruments.

Because of these key technological advances - cost, labor, and new areas of applications GIS and CAD - digital photogrammetric systems have been and are still developed. The main idea is the use of digital images for the data capture within the model area with a 3D “floating mark” with sub-pixel accuracy. Then use a digital workstation to compile the required features to form an intelligent description for an information system such as GIS and CAD systems (Madani 2001).

Close range photogrammetry has significant links with aspects of graphics and photographic science, for example computer graphics and computer vision, digital image processing, CAD, GIS and cartography (Luhmann et al. 2006).

The DPW looks much like an ordinary graphics workstation with some additional features, such as stereo display, 3D cursor, and, most likely, increased storage capacity to hold all the digital images of the entire project (Schenk 1999).

The important advantage of digital photogrammetry is the possibility of automation of photogrammetric task that human operators perform with great ease, thereby making use of our most impressive sense, namely "seeing" (Jacobsen 2001; Schenk 1999).

The difference between the first digital processing systems and today's digital processing systems is noticeable in orientation procedures: typically, the parameters of the exterior orientation are determined by two steps orientation in the previous DPW and the third phase - the parameters of the exterior orientation are determined in the two separate steps of the relative orientation and the absolute orientation. In nowadays digital photogrammetric software the exterior orientation parameters are determined during the fully automatic aerial triangulation procedure. The aerial triangulation is the basic procedure, on which the final result of image processing (orthophoto) depends. Nowadays nearly all block triangulation is done using the bundle method (Luhmann et al. 2006).

A more comprehensive description about today's digital photogrammetric systems *PhotoMod* and *Inpho* will be written in the further chapters. Also, in the further chapters will be written about the bundle block adjustment system *BLUH* and photogrammetric analyzing software *AICON 3D Studio.*

1.2. Images processing work stages

Digital image processing is concerned with acquiring, transmiting, processing and representing images (Schenk 1999). The principal procedures in close range photogrammetry is shown in figure 1.1 (Luhmann et al. 2006):

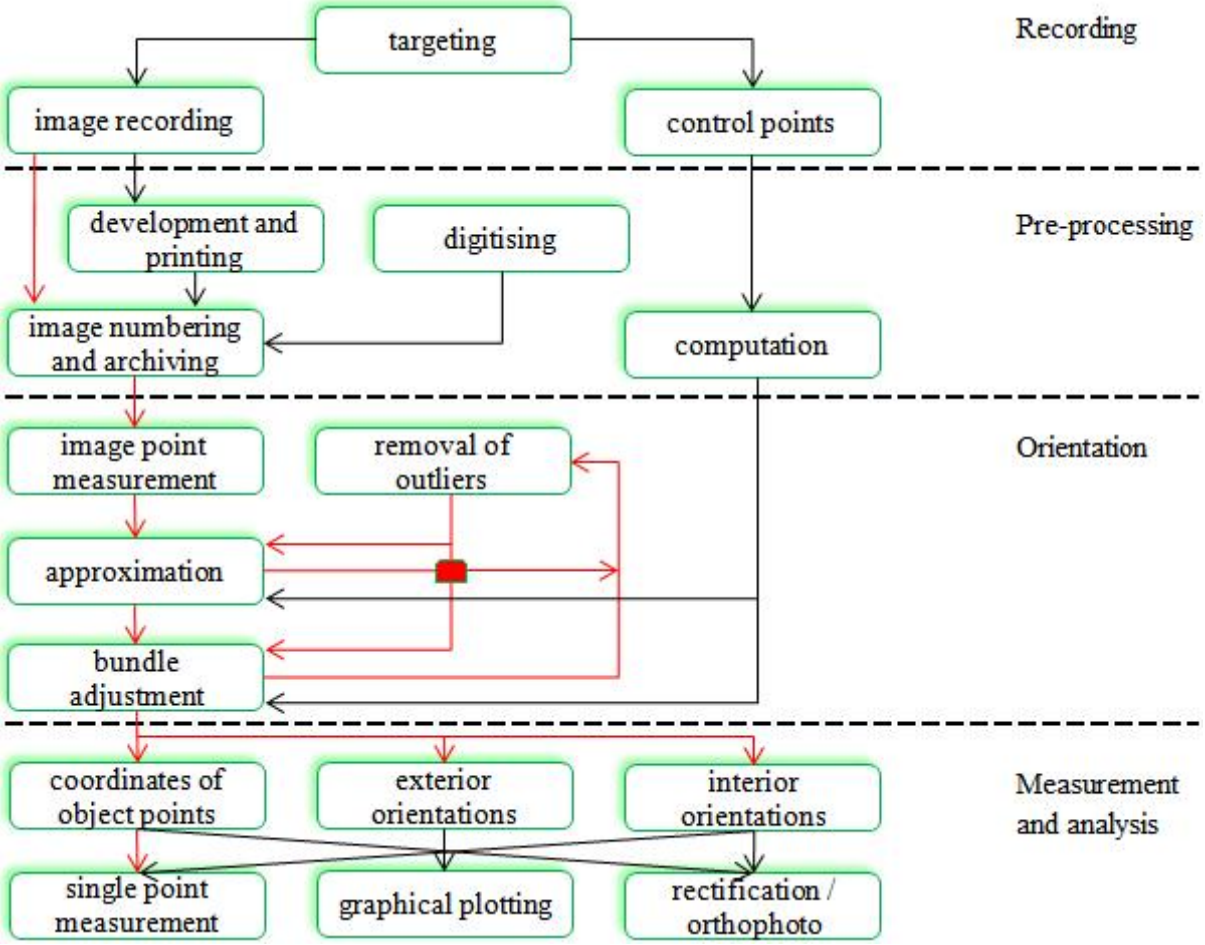


Fig. 1.1. Images processing

1. Recording

a) Targeting: target selection and attachment to object features to improve automation and increase the accuracy of target measurement in the image.

b) Determination of control points or scaling lengths: creation of a global object coordinate system by definition of reference (control) points and/or reference lengths (scales).

c) Image recording: analogue or digital image recording of the object with a photogrammetric system.

2. Pre-processing

a) Computation: calculation of reference point coordinates and/or distance from survey observations (e.g. using network adjustment).

b) Development and printing: photographic laboratory work (developing film, making photographic prints).

c) Digitising: conversion of analogue photographs into digital images (scanning).

d) Numbering and archiving: assigning photo numbers to identify individual images and archiving or storing the images.

3. Orientation

a) Measurement of image points: identification and measurement of reference and scale points; identification and measurement of tie points (points observed into two or more images simply to strengthen the network).

b) Approximation: calculation of approximate (starting) values for unknown quantities to be calculated by the bundle adjustment).

c) Bundle adjustment: adjustment program which simultaneously calculates parameters of the both interior and exterior orientation as well as the object point coordinates which are required for subsequent analysis.

d) Removal of outliers: detection and removal of gross errors which mainly arise during (manual) measurements of image points.

4. Measurement and analysis

a) Single point measurement: creation of three dimensional object point coordinates for further numerical processing.

b) Graphic plotting: production of scales maps or plans in analogue or digital form (e.g. hard copies for maps and electronics files for CAD model or GIS).

c) Rectification / Orthophoto: generation of transformed images or image mosaics which remove the effects of tilt relative to a reference plane (rectification) and/or remove the effects of perspective (orthophoto).

This sequence can, to a large extent, be automated (connections in red in Fig. 1.1). Provided that the object features are suitably marked and identified using coded targets, initial values can be calculated and measurement outliers (gross errors) removed by robust estimation methods (Luhmann et al. 2006).

1.3. Digital images processing accuracy control

Triangulation is the basic procedure, on which the final result (orthophoto) of image processing depends. Thus, the quality of triangulation is highly important (Sužiedelytė-Visockienė, Bručas 2009). In order to analyse the quality of the bundle adjustment, it is posible to calculate image coordinate residuals (corrections), standard deviations of object points and orientations data, correlations between parameters and reliability numbers for the detection of gross errors (Luhmann et al. 2006).

Image measurement accuracy depends on various factors: the performance of the camera (stability and calibration), the accuracy of the image processing system (image quality,

measurement algorithm, instrumental precision) and the positioning capability (identification of features) (Luhmann et al. 2006).

Figure 1.2 illustrates schematically the accuracy potential of typical imaging and processing systems as well as common and optimal system combinations (Luhmann et al. 2006).

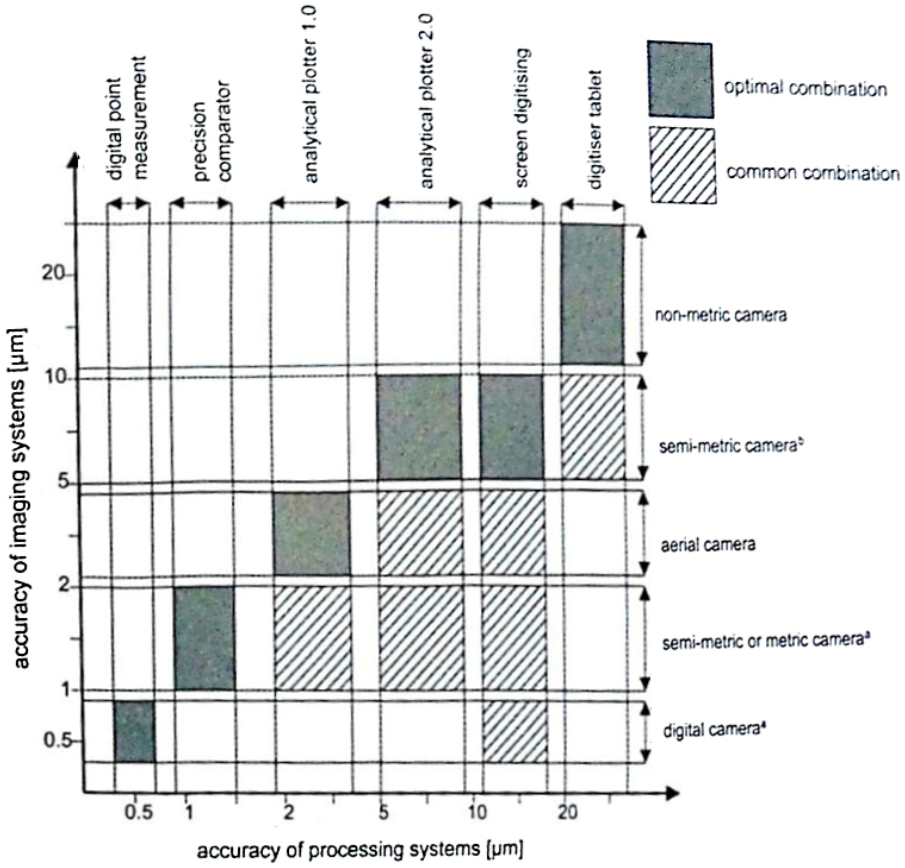


Fig. 1.2. Accuracy potential of imaging and analysis systems
a) with self-calibration and b) without self-calibration

If all above mentioned factors have a minimal influence, the digital imaging systems can reach image measurement accuracies of 0,2 – 1 µm (see fig. 1.2).

The accuracy result of triangulation is defined by standard deviation of unit weight (σ_0) (Luhmann et al. 2006):

$$\sigma_0 = \sqrt{\frac{[v^T P_v]}{n-u}}, \qquad (1.1)$$

where: $v^T P_v$ – vectors residuals of observations; n – number of observations; u - number of unknowns.

However, in many cases adjustment results are reported as root mean square errors (RMS) of the control points instead of the above defined standard deviation of unit weight. The RMS value is the square root of the mean squared difference between n given nominal values X_{nom} and corresponding adjusted observations X_{obs} (Luhmann et al. 2006; Kersten 1999):

$$\mathrm{RMS} = \sqrt{\frac{\sum(\mathrm{X_{nom}} - \mathrm{X_{obs}})^2}{\mathrm{n}}}, \qquad (1.2)$$

According analysed treatises during literature review, the value of standard deviation of unit weight (σ_0) can be achieved, for example from 1/3 pixel size to 1/5 pixel size.

More about accuracy control at various stages of photogrammetric processing and triangulation results by using different photogrammetric systems will be written in followed sections during images processing procedure.

2. DIGITAL PHOTOGRAMMETRIC SYSTEM *PHOTOMOD*

PhotoMod is a digital modular system providing full photogrammetric production line from the aerial triangulation to the output of digital terrain models, digital maps and orthomosaics. *PhotoMod* system contains tools for processing aerial photos and scanner satellite images from different sensors. Due to the system modular structure the user can choose the necessary configuration when purchasing the software. Network system version opens wide opportunities of working with a project simultaneously from several workplaces.

PhotoMod system is produced by Racurs Co. (Moscow, Russia) and has been dynamically developed since the version 1.1 in 1994. *PhotoMod's* growing user base includes organizations throughout more than 45 countries worldwide. The main fields of application include: photogrammetric production, cadastral mapping, cartography and remote sensing, academic photogrammetry, mining, architecture and construction (Available from internet: http://www2.racurs.ru).

The shutter / anaglyph glasses for stereo visualisation and hardware key is included in the *PhotoMod* system (Available from internet: http://www.infomap-rs.net).

Further in this chapter will be written about the modules of photogrammetric system *PhotoMod*, basic theory of images processing, accuracy control of photogrammetric measurements data and processing of the digital images.

2.1. The modules of digital photogrammetric system *PhotoMod*

PhotoMod is a modular system and each module of this system performs specific operations during a certain stage of processing. Consequently, there is no need to have all *PhotoMod* modules if they are not necessary for particular workflow.

Each module has a unique place in the overall workflow, making it possible to construct consistent project processing sequences. The fundamental concept of *PhotoMod* is to enable project work through a series of well-defined steps (data preparation, block adjustment, processing) and provide the support of a flexible set of tools at every stage.

The newest version of *PhotoMod* includes its main operating shell whose name is *PhotoMod Core* (in the old system - *Montage Desktop*) and 11 other modules (Fig. 2.1) (Available from internet: http://www.racurs.ru).

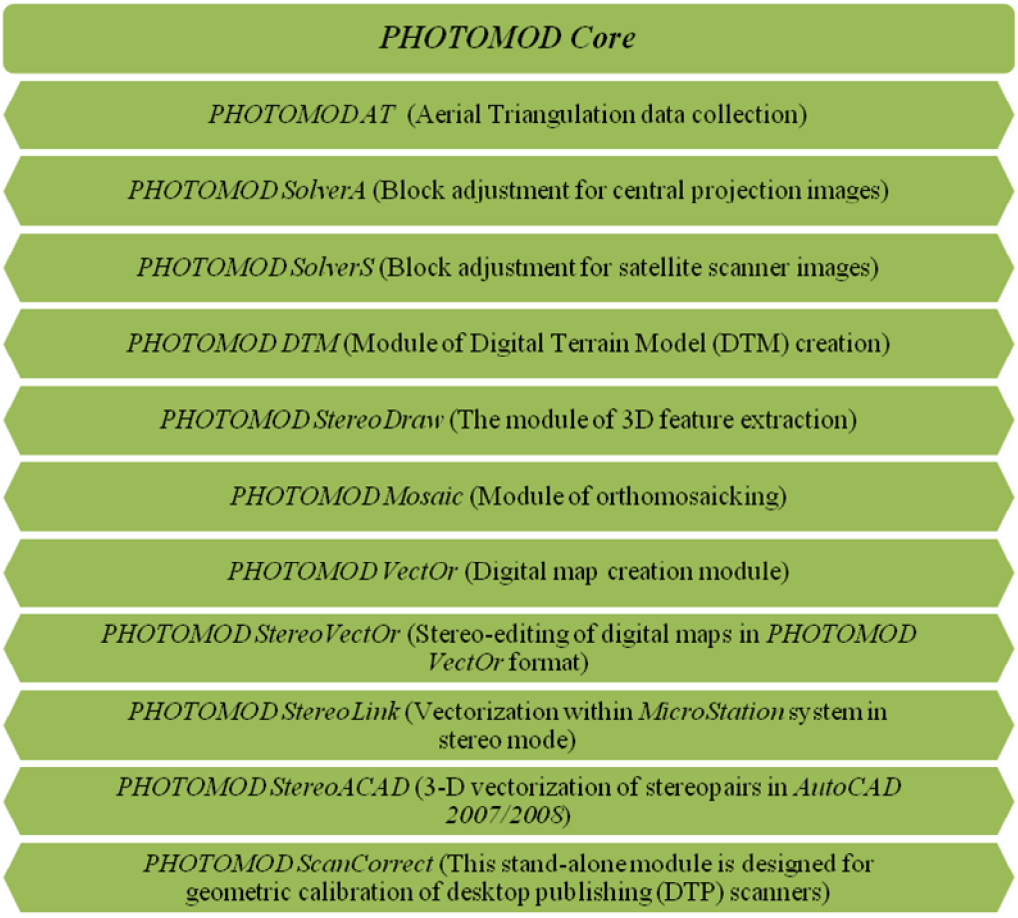


Fig. 2.1. Structure of the digital photogrammetric system *PhotoMod*

***PhotoMod Core (Montage Desktop)* functionality.** *PhotoMod Core*, the main shell of the *PhotoMod* system, initiates and manages an array of modules that guide the processing of photogrammetric project through every step. Also, *PhotoMod Core* is equipped with a wide range of auxiliary functions which are designed to simplify and optimize the project processing. The basic capabilities of *PhotoMod Core* is given in table 2.1 (Available from internet: http://www.racurs.ru):

Table 2.1. The basic capabilities of *PhotoMod Core*

Capabilities	Description
Project creation	*Type selection of the new project:* central projection, satellite scanner imagery or Airborne Digital Sensor (ADS 40). *Selection of coordinate system:* database supplied coordinate system, edition of existing coordinate systems or creation new coordinate systems.
Project management	Edition of the project properties; Projects duplication/deletion; backup/restore function; project location by using new "virtual folder" technology; importation of the projects from older *PhotoMod* versions (*PhotoMod 4.x*)

Table 2.1. continuation

Capabilities	Description
Block formation	*Images preparation for the project:* transformation of non-photogrammetric scanner images (*PhotoMod ScanCorrect*); radiometric image correction (most commonly used for 16-bit rasters); rasters convert to internal format; optional image compression; batch conversion processing. *Images loading and block formation:* load images to strips; rotate and replace images; the same images (without copying those) could be usable for multiple projects; block could be automatically spitted into strips; image could be corrected with *Image Wizard*.
Input of camera parameter for "Central projection" projects	*Camera passport data introduction:* type of the camera (digital or film) introduction; coordinates of principal point introduction; focal length introduction; coordinates of fiducial mark introduction (for film cameras); distortion coefficients introduction. Cameras duplication, renaming, or deleting; assignition to project images; importation/exportation.
Basic project operations	Interior orientation; importation/exportation of triangulation points; importation of exterior orientation parameters from different formats (can be used for direct georeferencing or precise block layout); importation of interior and exterior orientation parameters from Ultra Cam metadata; block layout creation from different data sources; reports generation of interior and relative orientation; importation/exportation and mono-edition of vector objects; importation/exportation of DEM, TIN and contour lines; window for viewing 3D objects from different angles; distributed processing.
Auxiliary utilities:	Explorer; Control Panel; Raster Converter; Image Wizard; GeoCalculator.

***PhotoMod AT* functionality.** This module is used to recognize and measure ground control points and tie points on the images. Ground control points (GCP) coordinates can be imported from a text file or entered directly by using keyboard. After coordinates are entered, the points are measured on the images in semi-automatic or stereo mode. In addition, to fully automatic aerial triangulation, *PhotoMod AT* includes tools for interior orientation, as well as GCP search and measurement. Collected data is passed to *PhotoMod SolverA* or *PhotoMod SolverS* for block adjustment and computing exterior orientation parameters (Available from internet: http://www.racurs.ru).

***PhotoMod SolverA and SolverS* functionality.** The modules *PhotoMod SolverA* and *SolverS* was named *PhotoMod Solver* before. The main difference between older module (*Solver)* and the newest modules (*SolverA* and *SolverS)* is that the newest modules are used for block adjustment of central projection (*SolverA)* and scanner satellite images (*SolverS)* individually. Sophisticated adjustment and error detection algorithms ensure successful aerial triangulation and highly accurate of Digital Terrain Model (DTM), orthomosaic and vector map output. *PhotoMod SolverA* and *SolverS* is capable to import/export aerial triangulation results which is get by using the software for block adjustment *PATB* (Available from internet: http://www.racurs.ru ; http://www.k2-photogrammetry.de/products/patb.html).

***PhotoMod DTM* functionality.** The *PhotoMod DTM* module creates and edits the digital terrain model (DTM). The module supports any type of digital terrain model: pickets, breaklines, Triangulated Irregular Network (TIN), DEM, contour lines, ect. DTMs may be edited in either mono or stereo mode. A special 3D window is used to view and analyze DTMs from different angles (Available from internet: http://www.racurs.ru).

PhotoMod DTM has a powerful set of tools for creating, editing, filtering and checking vector objects. External vector data can also be imported for use.

***PhotoMod StereoDraw* functionality.** *PhotoMod StereoDraw* is a module for 3D vector objects drawing and editing in stereo mode. 3D vectors can be used for digital map creation and for digital elevation model generation in *PhotoMod DTM* as relief model elements. Besides 3D vectors creation in *PhotoMod StereoDraw*, vector objects can be imported from popular formats. *PhotoMod StereoDraw* has a full tool set for editing 3D vectors, topological reconciliation, dividing into thematic layers, attaching to classifier records. Like other modules - *StereoDraw* supports page-flipping and anaglyph stereomodels.

StereoDraw includes a *3D-Mode* program for 3D modelling and exporting specially prepared 3D objects to *DXF* format.

Main features of the module of *StereoDraw* is given in table 2.2 (Available from internet: http://www.racurs.ru):

Table 2.2. The main features of *PhotoMod StereoDraw*

Capabilities	Description
Marker control	3D marker could be: moved by mouse or keyboard; switched to "Marker - mouse" mode; Automated to "Snap to ground" mode. Adjust form, color and size of marker; 2D and 3D snapping mode during vectorization.

Table 2.2. continuation:

Capabilities	Description
Vector objects drawing	Supports point, line, and polygon object types; Create objects by code using classifier; Classifier editing; Create table of attributes linked to a classifier record, or unique for some objects; Supports thematic layers; Supports of topological links during vector object creating; 90-degree turns during polyline or polygon drawing; Measures of lengths, area and angle.
Editing of vector objects	Select objects, groups of objects, objects by layer, objects by code; Insert, delete or move of vertices and reversing point numeration; Edit topology links; Change object types; Check and correct topology; Create 2D and 3D buffer zones; Group operations with vertices — deletion, plane movement, move to chosen Z-position or step along Z-axis; Group operations with objects — deletion, move to chosen Z-position or step along Z-axis; Draws
Tuning and additional interface capabilities	Parallax tuning for better stereo effect; Undo with predefined history length; Correlator parameter tuning; Tune visualization parameters, etc.
Import/export of vector objects	Supported formats (ASCII, ASCII-A, MIF/MID, DXF, DGN and etc.); Export Classifier and attributes to DBF file, linked to the vector objects file.

***PhotoMod Mosaic* functionality.** *PhotoMod Mosaic* module performs orthotransformation and mosaic creation in a single inseparable process. All geometric and photometric distortions are corrected during the orthomosaic creation process. The result of mosaic can be represented in a given cartographic projection both as a single image and as a set of sheets of specified size.

Any image which is available for *PhotoMod* software can be input for mosaic creation.

Created mosaics can be stored in the following files formats: *TIFF*, *Windows BMP*, *Vector RSW*, *GeoTIFF*, *ERDAS Imagine*, *NITF*, *JPEG* and *PNG*.

Formats for saving georeferencing data could be saved into these separate files: *PhotoMod Geo*, *ArcWorld TFW*, *ArcWorld BPW*, *MapInfo TAB*.

If a mosaic is cut into a number of sheets, raster and georeferencing files are created separately for each sheet (Available from internet: http://www.racurs.ru).

***PhotoMod Vector* functionality.** *PhotoMod Vector* module is designed to create and edit digital vector maps.

Main features of *PhotoMod Vector* is given in table 2.3 (Available from internet: http://www.racurs.ru):

Table 2.3. The main features of *PhotoMod Vector*

Capabilities	Description
Digital map creation	Full support of topographic, geographic and navigation maps nomenclature; Maps creation with specified parameters; Map generalization; Special map symbology editor; Merge or split maps sheets; Maps transformation to/from different coordinate systems and cartographic projections; Maps printing with full marginalia and coordinate grid; Map updating.
Vector editor	Powerful tools for digitizing and editing; Topological operations (buffer zones, spatial joining and intersection of objects, variety of snapping functions, object creation using existing objects, and more); Map object measurements; Objects selection through queries; Group operations performing with objects; Smoothing of vector objects; Place inscriptions along curves; Inscription placement by selected attributes; Vector objects creation by coordinates from file or user input; Semiautomatic vectorization of linear objects.
Working with raster files	Georeferencing to digital maps; Mosaics creation; Adjustment of brightness/contrast; Adjustment of color palette; Digitization of over raster image.
Working with digital terrain models	Creation of DTM from 3D vector objects; Importation of DTMs from *PhotoMod DTM* module; Shed models creation of view; Profiles creation; Contour lines creation; Conversion of 2D objects to 3D objects.
Import/export	*DXF; MIF-MID; GRD; BMP; TIFF*.

***PhotoMod StereoVector* functionality.** *PhotoMod StereoVector* module is designed to allow parallel work with a digital map in *PhotoMod Vector* format. The *PhotoMod Vector* stereo window is identical to that of *PhotoMod StereoDraw*. In the mono window, maps are displayed in accordance with the selected map symbol library. This module is especially useful for updating existing maps.

Editing is simultaneously implemented in both windows. All changes performed in the stereo window are automatically displayed directly in the mono window, without any need of additional import/export operations.

In its functionality and user interface, *StereoVector* is generally similar to the *StereoDraw* module. However, there are two main differences:

- *Vector* module uses the map classifier, instead of the user-defined *PhotoMod* classifier;
- Created (edited) vector objects are stored in Vector map format, not as *PhotoMod* resources.

It is reasonable to use *PhotoMod StereoVector*, if further map work is to be continued in the Vector module or *Karta 2008* software. If created vector objects are expected to be used in other systems, it is preferable to use *StereoDraw* (Available from internet: http://www.racurs.ru).

***PhotoMod StereoACAD* functionality.** *PhotoMod StereoACAD* - is intended for 3D vectorization of stereopairs in *AutoCAD 2007/2008*. 3D objects created in *PhotoMod StereoACAD* are saved in *AutoCAD* format DWG/DXF. They are available for viewing and editing with using standard tools of *AutoCAD* instruments. *PhotoMod StereoACAD* works in page-flipping stereomode in following *AutoCAD OS*: *MS Windows 2000* and *MS Windows XP*.

PhotoMod StereoACAD provides the following image visualization functions:

- Page-flipping stereoscopic view;
- Real-time roam with fixed stereo cursor;
- Dynamic zoom;
- Two modes of marker moving – pixel and geodetic coordinates;
- 2D-3D snapping modes.

PhotoMod StereoACAD advantages:

- Easy to learn, easy to work;
- Capability to use sophisticated command set of *AutoCAD* graphic engine;
- Quality and fast stereo visualization;
- No special equipment to control stereo cursor.

***PhotoMod StereoLink* functionality.** *PhotoMod StereoLink* is a simple way to convert standard Intel-based PC with *Windows NT* (or later version) into quality stereo plotter. *StereoLink* provides effective stereo feature collection including such DTM features as break lines, height points, etc.

It allows stereoscopic view of stereo pairs, stereo pair images contrast and brightness adjustment, 3D coordinates measurements, stereoscopic feature collection, and creation of user feature tables. Stereo feature collection can be done with or without user tables.

PhotoMod StereoLink works within *MicroStation 95/SE/J* environment as an MDL-application and provides the following image visualization functions:

- Page-flipping stereoscopic view;

- Real-time roam with fixed stereo cursor;
- Dynamic zoom.

PhotoMod StereoLink advantages:

- Capability to use sophisticated command set of *MicroStation* graphic engine;
- Support of user's cell libraries and line styles;
- Quality and fast stereo visualization;
- No special equipment to control stereo cursor;
- Support of industry data formats;
- Support of hierarchical feature tables.

***PhotoMod ScanCorrect* functionality.** *PhotoMod ScanCorrect* program is designed for correction of metric errors caused by scanning of graphical data on the DeskTop Publishing (DTP) scanners.

Transformation of raster image according to the scanner distortion field is used for errors compensation. Scanner distortion field is computed from raster data obtained by scanning calibrated material (regular grid or a set of crosses).

The basic principles of working with *PhotoMod ScanCorrect* are the following:

- Inclusion of calibrated material into sequence of scanning of graphic material to obtain distortion field;
- Formation of the distortion field using raster data from the scanned calibrated material;
- Transformation of all raster data according to the distortion field.

Analysis of precision characteristics of DTP scanners shows that scanner distortion field is caused mainly by systematic scanner errors. Thus it is possible to apply the distortion field created from one image when transforming another.

If original graphic material (for example photo image) has calibrated crosses on it, the technique remains the same, but distortion field is formed from the same raster that is used in transformation. There is an option to input and reckon with the table containing coordinates of the crosses.

Input and output data of the program is 1, 4, 8, and 24-bit files in Windows BMP or TIFF formats. Auxiliary data (distortion field) is saved in ETM files.

The program allows fast converting of raster data (Available from internet: http://www.racurs.ru):

- From Windows BMP format to TIFF format;
- From TIFF format to Windows BMP format.

2.2. Images processing by using photogrammetric software

Images processing of object by photogrammetry method include of the following work steps (Sužiedelytė-Visockienė et al. 2011):

- Images interior orientation;
- Images relative orientation;
- Calculation of Bundle adjustment (triangulation);
- Draw the structural line of object;
- Creating Triangulated Irregular Network (TIN) of object surfaces;
- Creation of orthophoto map.

Interior orientation. The orientation procedure consists of the reconstruction of the interior orientation, which describes the geometry of the ray bundle in the camera, and the exterior orientation. The interior orientation specifies the functional dependencies between the principal point and the point, where the light ray intersects the image plain. The position of this intersection point is described by image coordinates (Wiedemann 2005). The image coordinate system defines a 2D image-based reference system of rectangular Cartesian coordinates. Its physical relationship to the camera is defined by reference points, either fiducial marks or a reseau, which are projected onto the acquired image. For a digital imaging system, the sensor matrix defines the image coordinate system. Usually the origin of the image or frame coordinates is located at the image centre (Luhmann et al. 2006). Thus, the purpose of interior orientation is to create the geometry of the projected rays that formed the image.

If the camera with the known camera calibration parameters is used, the transformation of image to the geodesy coordinate system is calculated according to the equation (Sužiedelytė-Visockienė, Bručas 2009):

$$x = x'_c + k_x(x_c \cos\varphi - y_c \sin\varphi), \quad (2.1)$$

$$y = y'_c + k_y(x_c \sin\varphi + y_c \cos\varphi), \quad (2.2)$$

where x, y – coordinates of a point in the geodesy coordinate system; x_c, y_c – coordinates of the points in digital image coordinate system; x_c' y_c' – origin of the digital image coordinate system in the geodesy coordinate system; φ – the rotation angle of the image coordinate system in the geodesy coordinate system; k_x, k_y – the coefficients describing an image deformations along the x, y axes.

If the used camera is calibrated, the interior image orientation may be done by transforming the measured coordinates into a calibration system, defined by the fiducial marks or

the réseau crosses (Sužiedelytė-Visockienė, Bručas 2009).

If a non-calibrated camera has been used, an independent set of parameters of the interior orientation is necessary for each image. In frame cameras independent parameters of the interior orientation are only required if the zoom factor or the focus of the camera has been changed during the image acquisition (Sužiedelytė-Visockienė, Bručas 2009).

The procedure of the interior orientation using the photogrammetric system *PhotoMod* depends on the type of the camera with which the images were taken of:

- In images from an analog camera the fiducial marks on the margins of images should be measured. In this case the errors of interior orientation are calculated along both axes (Kiseleva 2002). The procedure used for the interior orientation is dependent upon the fiducial mark data and can be performed in manual, semiautomatic or fully automatic mode, as determined by the camera type (Available from internet: http://www.racurs.ru);
- For images from digital cameras, the interior orientation is performed in an automatic mode. It is only needed to enter the parameters of the interior orientation from the camera protocol and the axis orientation (Kiseleva 2002; Available from internet: http://www.racurs.ru). The parameters of the interior orientation (coordinates of the principal point, the focal length and the radial symmetric lens distortion coefficients) from the camera should be input in the same units – either pixels or millimetres (Racurs 2009).

The interior orientation should be done for each image which will be used for the data processing.

Relative orientation. The relative orientation recovers the position between the two ray bundles, creating a 3D stereo model (Ruzgienė 2008). The process of the relative orientation computes the relative orientation parameters to define the relative position of the pair of images (Racurs 2009).

The process of the relative orientation is as follows (Kiseleva 2002):

- measuring of the tie points in the stereo pairs in the overlapping areas and triplet zones (if we have three images);
- measuring of the tie points between adjacent strips;
- input and measurements of ground control points.

The following tie points position/number is considered as an optimum: tie points are grouped in the special standard zones in the images overlap, at least 2-3 points in each group (Fig.2.2) (Kiseleva 2002).

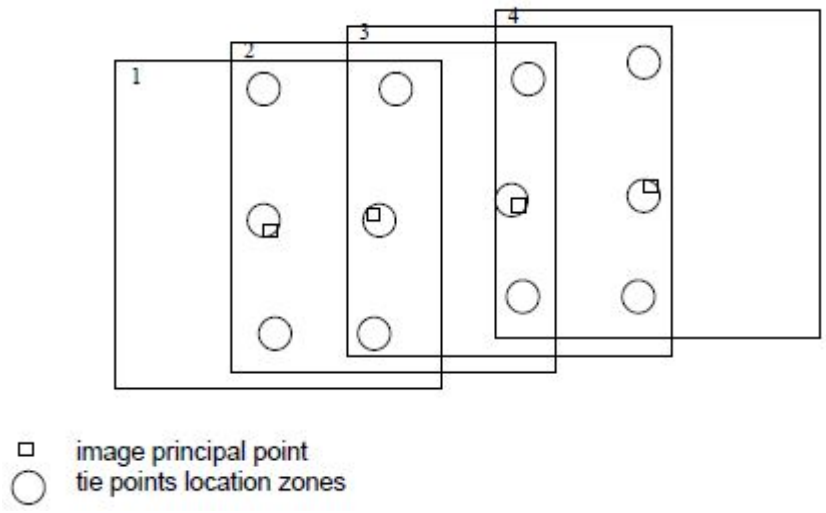


Fig. 2.2. Grouping of tie points in the images overlap

This way provides the most accurate and reliable determination of relative orientation parameters with possibility of localization of blunders. It is recommended that points in the triple overlap area were, if possible, placed uniformly in this zone (Kiseleva 2002).

Inter-strip tie points should be located in the side lap areas symmetrically relatively to its midline approximately as shown on Fig.2.3 (Racurs 2009).

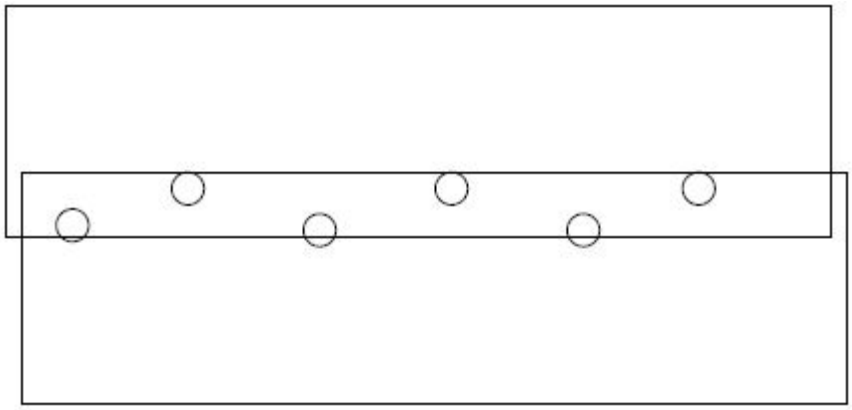


Fig. 2.3. Grouping of inter-strip tie points in the images side lap areas

It should be noticeable, that after entering a tie point in the inter-strip overlap area the results of the relative orientation procedure for the images containing this point are rejected. Thus, in this case, it should be entered such points before making orientation of stereo pairs in strips. Also, inter-strip tie points must be transferred to at least one adjacent image in each strip. Otherwise they will not be taken into account in the block adjustment by independent models method (Racurs 2009).

The measurement of a set tie points on overlapping images is needed to perform phototriangulation (Racurs 2009).

Tie points are used to create models from pairs of adjacent images and to create from these models the model of the whole strip or block in the block adjustment procedure (Racurs 2009).

Measuring points means their stereoscopic measuring on both stereo pair images (Racurs 2009).

Stereoscopic measuring can be fulfilled in three following ways (Racurs 2009):

- By manual positioning of the marker on each of two images;
- By manual positioning of the marker on one image and transferring the marked point to another image with correlation;
- By manual positioning of the marker in stereo mode.

Tie points can be measured in full automatic mode on both stereo pair images using correlation procedure (Racurs 2009).

The measurement of ground control points in photogrammetry is an essential part of producing accurate exterior orientation, DEMs and orthophotos (Available from internet: http://www.pvts.net). Coordinates of GCP could be entered in the software by importing the catalog of GPC (in text file) or entering values of GCP coordinates from keyboard (Racurs 2009). If the coordinates of the images projection centers is known – those could be used for block adjustment. In this case, the names of projection centers should be equal to the names of corresponding images. For the processing of single image in central projection the minimum number of control points is 3 (3 GCPs or 2 GCPs and the projection center). It is should be known that the GCP coordinates are given in the coordinate system selected, during project creation in *PhotoMod Montage Desktop* module (Racurs 2009).

After GCPs coordinates are inputed – the ground control points should be recognized and measured on the images. Ground control points must be identified and measured on one of the strip images only. If a point is imaged on more than one image it can be measured (transferred) to these images at steps 3 (Strip ties) and 4 (Tie points measurements) (Racurs 2009).

The measuring of ground control points on the images is follows (Racurs 2009):

- Selection of the point name in the list in the lower left part of the window;
- The marker positioning exactly on the ground control point on the image;
- The measurement appliance by pushing the button which is need to record the value of GCP.

When two new points are measured, selecting the third and following points in the list leads to the automatic positioning of the marker of the surrounding of selected point (Racurs 2009). Also, after coordinate values are input, points are measured on the images in semi-automatic or stereo mode (Available from internet: http://www.racurs.ru).

The more control and tie points are available, the better the results of the orientation

process in terms of accuracy and reliability can be obtained (Wiedemann 2005).

Bundle adjustment. During the bundle adjustment procedure the block adjustments of the strips and the image blocks takes place. The GCPs and tie points are used for the block adjustment (Racurs 2009).

PhotoMod Solver provides three algorithms to be used for the block adjustment procedure (Racurs 2009):

• **Independent strips.** This method is used to check out the gross errors, such as wrong coordinate values of control points, incorrect tie point's measurements, etc. The accuracy of this method in case of long strips (more than 10 images) may be a dozen times worse than the adjustment accuracy achieved by the other two methods.

• **Independent stereo pairs.** This method is usable for increasing the accuracy and detection of more delicate errors.

• **Bundle adjustment** is used for the final block adjustment.

In most cases, it is practical to perform adjustment alternately by method of independent stereopairs and bundle adjustment for searching and correction of delicate errors (Racurs 2009).

The break lines of object. In this part of processing of the digital images the break lines of the object are drawing (the 3D vector object is creating). Vectorization of objects could be done (Racurs 2009):

- **by stereomodes** (by using anaglyphic or shutter glasses);
- **by mono mode.**

Stereomode. Objects vectorization by stereo mode is performing by using anaglyphic or shutter glasses.

Anaglyphic glasses. Anaglyph stereoimage is formed by visualization of the left and right images of the stereopair “beyond” red and blue filters. To view such a picture you should use special anaglyph spectacles with red and blue glasses. Anaglyph stereomode requires no special equipment but it is not completely good for working with color images. Another disadvantage is that the picture gets a bit darker when viewing through filters (Racurs 2009).

Shutter glasses. Shutter glasses are liquid crystal glasses synchronized with the vertical refresh rate of the monitor. *PhotoMod* system supports two modes of working with shutter glasses (Racurs 2009):

- Interlace stereo;
- Page-flipping stereo.

Interlace stereo. Interlace (“line by line”) display mode divides the display frame into two semi-frames. The first one contains odd lines and the second one contains even lines. The right and left images of the stereopair are displayed one by one in ”odd” and “even” frames. The shutter

glasses are synchronized with the monitor vertical refresh rate and allow you to see them "simultaneously" and make stereo measurements. The interlace mode may be applied only for the whole screen, so it introduces some inconvenience when working with menus. Another disadvantage is sampling picture and, thus, reducing its resolution because of using semi-frames. The comfortable vertical refresh rate of your monitor should be at least 75 Hz "for each eye" (150 Hz for interlace mode) (Racurs 2009).

Page-flipping stereo. The page flipping ("frame by frame") display mode provides the highest quality stereo picture because it uses full frames instead of semi-frames. The left and right images of the stereopair are displayed one by one synchronously with the frames switching. The shutter glasses are synchronized with the monitor vertical refresh rate and allows to see them "simultaneously" and make stereo measurements. For working in page-flipping mode - should be used a monitor with a good enough vertical refresh rate (at least 120 Hz) and an appropriate video adapter (Racurs 2009).

Mono mode. Monomode displays the left epipolar image of the stereopair and the left component of the stereomarker. All created in such a way vectors should be checked manually in stereomode to avoid possible correlator errors (Racurs 2009).

Triangulated Irregular Network (TIN). A triangulated irregular network (TIN) is a digital data structure used in a geographic information system (GIS) for the representation of a surface. A TIN is a vector based representation of the physical terrain surface, made up of irregularly distributed nodes and lines with three dimensional coordinates (x, y, and z) that are arranged in a network of non-overlapping triangles (Available from internet: http://en.wikipedia.org).

PhotoMod software provides several different strategies (algorithms) of TIN creation (Racurs 2009):

- Regular TIN;
- Adaptive TIN;
- Smooth TIN;
- TIN from vector objects;
- TIN from regions;
- TIN from pickets;
- Convex TIN from pickets.

Regular TIN. In case of regular model the program calculates Z values of all grid nodes using correlation algorithm. If the program fails to compute Z coordinate of a node in automatic mode the value of the third coordinate is calculated by interpolation between the adjacent nodes with automatically computed coordinates. The errors of automatic computations of the model can

be corrected later during the manual model editing. The final TIN is triangulated from grid nodes by modified Delaunay algorithm. It is recommended to build regular TIN when working with very heterogeneous images that can be characterized by the small-granular texture or high degree of details (Racurs 2009).

Adaptive TIN. The adaptive model is the most frequently used type of TIN. It is recommended to process images having big homogeneous or smooth parts. This method is also good for close-range photogrammetry (Racurs 2009).

The program calculates 3D coordinates using most distinctive point of image in the neighborhood of each inner grid node (the area size is 1/3 from grid step), if the option *Fixed nodes* is off. In nodes of grid boundaries the points are calculated exactly in node location. If it is impossible to calculate 3D coordinates for some node, it is skipped (except grid boundary nodes if the Rectangular boundary option is on, in this case such nodes are marked as "uncertain" and their height is calculated by interpolation of adjacent vertices) (Racurs 2009).

The final TIN is triangulated from grid nodes by modified Delaunay algorithm (Racurs 2009).

Smooth TIN. This option is suitable for smooth relief that has relatively small number of characteristic points. In the case of smooth models the polynomial interpolation function describing the surface is calculated based on 3D vector points (pickets) (Racurs 2009).

An additional parameter used for smooth model building is *Max. number of pickets* to calculate node. The total range of values is 3 – 1000. When number of pickets is not very big (500 – 1000) you should use all pickets that allow you to use all pickets and to eliminate time for searching of the closest to every node pickets whose number is equal to selected parameter value (Racurs 2009).

Smooth TIN is useful when working with smooth surfaces since it does not require editing operations related to the correlator errors (Racurs 2009).

This type of model is used for building TIN and computing contour lines for urban areas. In this case you should locate pickets on the “ground surface” to “remove” buildings, fences, trees, etc from TIN. For example you can create 3D vector lines along the town streets and use them as sets of pickets for smooth model creation. However you should keep in mind that the interpolation function may cause some residuals between real and calculated surfaces because of the smoothing (Racurs 2009).

TIN from vector objects. In this case TIN is created by triangulation of currently existing vector objects. Vector points become TIN nodes and vector lines and polygons are linked to the TIN as breaklines.

This method is very useful when you have big enough number of 3D vector objects, which completely describe the surface since it does not require editing operations related to correlator errors. As in case of smooth model you can use **TIN from vectors** algorithm to clean "noisy" elements as buildings, trees, etc. from the model just because they are not vectorized. Creating **TIN from vector objects** is more precise operation in comparison with smooth modelling, as it does not use the interpolation function (Racurs 2009).

TIN from regions. The area of the stereopair may be divided into separate regions (***local regions***) in order to use different strategies for building TIN in each region. So you can "bound" a village area by the local region and create **TIN from vectors** inside this region and **Adaptive TIN** outside this region. Prior to building TIN from regions you should create local regions and set up the parameters for each of them (Racurs 2009).

TIN from pickets. You may create a TIN by direct triangulation of pickets. Prior to TIN creation you can collect data (as 3D points – pickets) about terrain relief using different methods. ***PhotoMod*** **DTM** uses the same algorithms to build TIN and pickets. The difference is just that the pickets are not triangulated to the net of triangles and are string just as a set of XYZ points. To improve the relief model you can load the breaklines additionally to pickets (Racurs 2009).

You should start automatic pickets' extraction using regular, adaptive and smooth algorithms with rectangular grid creation (Racurs 2009).

You can also add pickets manually by positioning the marker on the place you need on stereo model (Racurs 2009).

Convex TIN from pickets. TIN is created by direct triangulation of pickets. The operation is similar to TIN creation using point vector objects, but in this case they are pickets (Racurs 2009).

The operation results in creation of TIN with convex border. It is useful if the initial pickets are distributed in such a way that they do not cover some part of a model – for instance, if there are vast water bodies (rivers and lakes) on large scale images (Racurs 2009).

Creation of orthophoto map. Orthophoto could be produced by using one image or several neighboring overlap images. Several neighboring overlap images generation into ortophotographic view is calling *mosaicking* (Shariat et al. 2008).

Types of terrain models used in orthorectification by using *PhotoMod* software could be provided by that several different strategies: (Available from internet: http://www.racurs.ru):

- User-defined constant height level;
- Ground control and tie points measured in the aerial triangulation step;
- DEM.

It is necessary to control the data quality in all the above-mentioned work stages, particularly the results of the triangulation. Thus, in the next section will be described accuracy of photogrammetric measurements data.

2.3. Accuracy control of photogrammetric work stages

The accurate measurements of ground control points and tie points in the digital images leads to the accurate results of triangulation (bundle adjustment). Thus, the measurements quality should be observed at every work step.

The measurement quality of tie and ground control points by using this photogrammetric software can be checked by the following ways (Sužiedelytė-Visockienė et al. 2011):

1) Accuracy control using correlation coefficient (if points are added by correlator). The acceptable value of the correlation coefficient can be determined from images quality. For contrast and high quality images the threshold is 0.9–0.95, for unclear images the threshold can be 0.8 at well recognized points.

2) Accuracy control using vertical parallax residual. After measuring 5 points on the stereopair, the relative orientation parameters of images pairs are calculated and then recomputed more exactly by software while points being added. The program calculates the maximum error (E_{max}) of vertical paralallax residuals and the root mean squared error (RMS) (Sužiedelytė-Visockienė et al. 2011):

$$E_{max} = 2 \times E_{mean}\,, \qquad (2.3)$$

$$RMS = \sqrt{2} \times E_{mean}\,, \qquad (2.4)$$

where E_{mean} – mean error of measurement points in the model. This error should not be greater than half of the scanning pixel size for analog camera and half of matrix pixel size for digital camera.

Measurement units are pixels or millimetres depending on camera units.

The images of the object were taken by using the digital camera *Canon EOS 1D Mark III* with the matrix pixel size of 6.4 μm. Thus, the mean value should not be more than 3.2 μm (Sužiedelytė-Visockienė et al. 2011). The maximum error and the root mean squared error of measured tie and ground control points should not exceed the values given in table 2.4.

Table 2.4. Calculated maximum error and root mean squared error to the digital camera *Canon EOS 1D Mark III*

E_{max}, µm	RMS, µm
6.4	4.5

3) Accuracy control by adjacent models (in overlapping or triplets). After measuring the tie and ground control points on stereo pairs (models) they should be transferred to the geodetic coordinate system**.** The relative orientation accuracy can be checked by comparing the discrepancies of the points measurements on the adjacent models (in triplets). Triplet errors: E_X, E_Y, E_Z in their X, Y, Z coordinates were calculated on two adjacent models. Mean triplet errors in XY plane and Z coordinates are calculated by following formulas (Sužiedelytė-Visockienė et al. 2011):

$$E_{mean}^{XY} = \sqrt{2} * 0{,}5 \times pxl, \quad (2.5)$$

$$E_{mean}^{Z} = \frac{c}{b_x} E_{mean}^{XY}, \quad (2.6)$$

where *pxl* – is the matrix pixel size for a digital camera (6.4 microns); c – is the focal length of a camera (Table 2.5, 2.6), b_x – is base in the image scale.

Approximate base in the image scale (b_x) was calculated by using the following formula (Kiseleva 2002) :

$$b_x = l_x \times (100\% - p_x) \times m/100\%, \quad (2.7)$$

where: b_x - survey basis (13.2 mm); l_x - image size along the X axis (35.9 mm); p_x - size of the overlapping zone (60 %); m –scale denominator of the image (0.92).

The discrepancies of E_{mean}^{XY} and E_{mean}^{Z} should not exceed the values given in table 2.5 (Sužiedelytė-Visockienė et al. 2011).

Table 2.5. Quality of measurements of GCP and tie points

Point	E_{mean}^{XY}, µm	E_{mean}^{Z}, µm
GCP,Tie	4.5	17.3

After relative orientation and triplet accuracy control the next stage – bundle adjustment can be performed. According software manufacturers, acceptable errors on bundle adjustment are dependent on different products: topographic maps or orthophoto creation (Kiseleva 2002).

Accuracy control of bundle adjustment for topographic maps creation. Accuracy control for topographic maps creation on ground controls points (GCP) after adjustment should not be greater than 0.2 mm in XY plane (in output map (plane) scale) and $0.15 \times h_{int}$ by Z, where h_{int} – contours interval of the output map (Kiseleva 2002).

Acceptable mean residuals on tie points – 0.3 mm in the output map scale. Also acceptable mean residuals on tie points by Z (Kiseleva 2002):

- $0.2 \times h_{int}$ – for contour interval of 1 m and also for scale 1:1000, 1:500 with the contour interval of 0.5 m;
- $0.25 \times h_{int}$ – for contour interval of 2.5 m and also scale – 1:2000 and 1:500 with the contour interval of 0.5 m;
- $0.35 \times h_{int}$ – for contour interval of 5 m and 10 m.

Accuracy control of bundle adjustment for orthophoto creation. Accuracy of adjustment for orthophoto creation is actual for architecture objects or orthophoto maps creation. In the *PhotoMod* software acceptable mean residuals of GCP in XY plane are 0.2 mm in output map scale and in Z – $1/3\Delta h_{DTM}$, where Δh_{DTM} is mean residuals of Digital Terrain model (DTM). Calculation formula of Δh_{DTM} is (Kiseleva 2002):

$$\Delta h_{DTM} = 0.3mm \times c \times \frac{M}{r} , \qquad (2.8)$$

where M – output map (plane) scale; r – maximum distance from the image point to the nadir point (mm), which equals to the half of diagonal of "working area".

As it is seen from above by software manufacturers given information about bundle adjustment accuracy results - the program does not calculate σ_0 value for final evaluation of triangulation. In this case, the accuracy result of bundle adjustment should be calculated by using 1.1 or 1.2 formulas, given in section 1.3.

Further in next section will be described the images processing procedure and the results of images processing. Also the brief discussion about the processing results will be given.

2.4. Processing of the images by using digital photogrammetric software *PhotoMod*

The object of analysis is the North wall of the Vilnius University yard in the Vilnius old town (Fig. 2.4) (Sužiedelytė-Visockienė et al. 2011).



Fig. 2.4. Three overlapping images (P915-P912-P918)

The images were taken by using the *Canon EOS 1D Mark III* digital photo-camera. The characteristics are listed in Table 2.6 (Sužiedelytė-Visockienė et al. 2011).

Table 2.6. Characteristics of digital camera *Canon EOS 1D Mark III*

	Characteristics	**Value**
	Focal lengths (mm)	50
	Resolution (pixel)	21 mln.
	Pixel size, *pxl* (μm)	6.4×6.4
	Image size (mm)	35.9×23.9
	Image size (pixel)	5616×3744

This camera is calibrated (its optics distortions determined and evaluated) by using Tcc software at the Institute of Photogrammetry of University of Bonn (Germany) in 2008 (Sužiedelytė-Visockienė, Bručas 2009). The camera parameters are given in Table 2.7 (Sužiedelytė-Visockienė, et al. 2011).

Table 2.7. Result of camera *Canon EOS 1D Mark III* calibration (2008)

Parameter	**Result**
Focal length (mm)	
c	50.7583
Scale of image (constant)	
S_{xy}	0.99
The base point corrections of the photo-camera (mm)	
x_0	-0,0495
y_0	-0,2559
Radial-symmetrical distortion of the photo-camera	
A_1	–1.789E-09
Radial-asymmetrical distortion of the photo-camera	
B_1	1.017E-8
B_2	–1.655E-8

The images of the object were corrected for the digital camera objective distortions by using the special software *Tcc Distortion Correct* made in Germany. In the figure 2.4 were correct three overlapping images.

The calculated accuracy results of the prime step of images processing (relative orientation) is already known (see section 2.3). In this case the images processing could be started. The accuracy results of images processing are always observing with already known measurement discrepancies during the images processing procedure.

The first step of the processing of scanned images is the interior orientation. Because of the images were taken with digital camera, the first step of images processing was performed by software in automatic mode. The coordinates of principal point are known from camera definition where the parameters of sensor geometry during new project creation were entered. The coordinates of principal point are x’ = 2808 and y’ = 1872 given in the unit pixels (Sužiedelytė-Visockienė, Bručas 2009).

The next step of images processing was the relative orientation. During this procedure, first of all, the 8 tie points were placed uniformly in the triple overlap area and measured. Further, values of 10 ground control points coordinates were entered and ground control points were measured in stereo mode. The coordinates of ground control points are in the relative coordinate system of the building. The tie and ground control points were measured manually.

We had the three images and made two models P915-P912 and P912-P918 (triplets) during procedure of relative orientation. In this case the accuracy control of relative orientation by using digital photogrammetric software *PhotoMod* can be checked in followed ways:

- separately in each model (according formulas 2.3 and 2.4). In this case the accuracy control of the final result of relative orientation is computed;
- in all models together (according formulas 2.5 and 2.6). In this case the accuracy control could be observed separately for tie and ground control points in triplets after transference to the relative coordinate system of the building.

The final result of relative orientation was evaluated for two model separately according given formulas 2.3 and 2.4 (see section 2.4). Accuracy control result present in the table 2.8.

Table 2.8. Relative orientation result

Model	E_{max}, **µm**	***RMS*, µm**
P915-P912	3.5	1.7
P912-P918	3.3	1.9
Average	**3.4**	**1.8**

This step of accuracy control using by manufacturer given formulas was successful: the average of maximum vertical parallax error (E_{max}) and root mean squre error (RMS) for both model does not exceed computed values in table 2.4.

Also, this step of images processing was evaluated according given formulas 2.5 and 2.6 in triplets for tie and ground control points separately. The accuracy result of tie and GCP in triplet of relative orientation (mean triplet errors in XY plane and Z coordinates) is shown in table 2.9.

Table 2.9. Quality of triplets

Point	E^{xy}_{mean}, **µm**	E^{z}_{mean}, **µm**
GCP	3.0	8.0
Tie	4.0	16.0
Average	**3.5**	**12.0**

The second step of accuracy control using by manufacturer given formulas was also successful: the average of mean triplet errors in XY plane and Z coordinates do not exceed values which were computed according 2.4 and 2.5 formulas.

In order, to control accuracy results independent of software manufacturers given formulas, the results of this step of images processing were observed by looking for residuals of

each points and computing standard deviation. The displacement of the projection of the adjusted ground coordinate into the image compared to the measured image coordinate is given in table 2.10:

Table 2.10. Residuals between adjusted coordinates and between measured coordinates in the images

Point ID	Point type	Number of images the point was measured in	Image ID	Residuals x, µm	Residuals y, µm
102	GCP	2	P915	-0,1	-0,1
			P912	0,0	1,0
105	GCP	3	P918	0,1	0,8
			P915	-0,6	-0,6
			P912	0,8	0,8
106	GCP	3	P915	-0,1	-0,1
			P912	0,0	0,4
			P918	-0,1	0,7
107	GCP	2	P912	0,1	0,0
			P918	-0,2	0,3
109	GCP	3	P915	0,3	0,9
			P918	0,2	0,0
			P912	0,0	-0,7
110	GCP	2	P915	-0,4	-0,1
			P912	-0,1	-2,5
111	GCP	3	P918	-0,1	-5,1
			P915	0,0	0,6
			P912	0,0	-0,1
600	GCP	2	P912	0,1	-1,2
			P915	0,3	-0,2
602	GCP	3	P912	0,0	-1,2
			P918	-1,4	-1,5
			P915	-1,5	1,5
603	GCP	2	P918	0,3	0,0
			P912	-0,2	0,0

Table 2.10. continuation:

Point ID	Point type	Number of images the point was measured in	Image ID	Residuals x, µm	Residuals y, µm
901	TP	2	P918	-0,5	-0,5
			P912	0,2	0,1
902	TP	2	P912	0,0	1,0
			P915	-0,2	-0,2
903	TP	3	P915	-0,6	-0,8
			P918	-0,6	0,3
			P912	0,0	1,0
904	TP	3	P918	0,4	0,3
			P915	0,4	-0,3
			P912	0,0	0,6
905	TP	2	P912	-0,2	0,1
			P918	0,3	0,2
906	TP	2	P912	-0,1	0,0
			P918	0,2	0,4
907	TP	2	P912	0,0	0,0
			P918	-0,1	-0,4
908	TP	2	P912	0,0	1,1
			P915	-0,1	0,2
Standard deviation				**0,4**	**1,1**

As it is seen from table 2.10, the standard deviation is: x = 0,4 and y = 1,1 given in the units micron. This step of images processing was successful and results are great.

As was written in previous section - the program does not calculate σ_0 value for final evaluation of triangulation. In this case, for computation of triangulation result, the residuals of measured the image points of the ground control points (X, Y and Z) is shown in table 2.11:

Table 2.11. Residuals of measured the image points of the ground control point

Point ID	Number of images the point was measured in	Residuals X, m	Residuals Y, m	Residuals Z, m
102	2	-0,003	-0,002	-0,004
105	3	0,001	0,000	0,007
106	3	0,001	-0,001	0,004
107	2	0,001	-0,001	-0,007
109	3	0,001	0,007	0,007
110	2	0,002	-0,002	-0,005
111	3	-0,002	-0,002	0,004
600	2	0,001	0,002	0,004
602	3	-0,002	-0,004	-0,019
603	2	0,000	0,003	0,010
RMS		**0,002**	**0,003**	**0,008**

As can be see from previous table, the residuals of measured the image points of the ground control points are very trifling. The values of RMS shows the final result of aerial triangulation (see section 1.3). The final result of aerotriangulation is great. The triangulation report is given in appendix 1.

After the bundle adjustment the TIN data of an object is available for compiling break lines and orthophoto map. The accuracy of all these results is determined by the received accuracy of the aerial triangulation (Table 2.11) (Sužiedelytė-Visockienė et al. 2011).

The created break lines of the object were drawn in stereomode by using shutter glasses (Fig. 2.5).

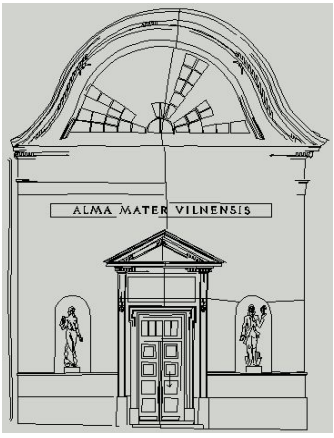


Fig. 2.5. Break lines of the object

The TIN of the object was created by using these strategies of the TIN creation:

- Regular TIN. By using this algorithm the smallest step of the grid was selected (0.5 mm). The result has obtained of a cloud of 341 550 points;
- Adaptive TIN. The result has obtained of cloud of 131 830 points by using this algorithm.
- Smooth TIN. Creating TIN of the object by using this algorithm the photo triangulation and break lines data was used. Also, the maximum number of pickets was carried out. Pickets are needed for the calculation of nodes highs. The result has obtained of 334 756 nodes.

The orthophoto of the object was created by using one image P912 (Fig. 2.4). The view of the object is captured from front on it. The image P912 was rectified with reference to ground control points and tie points. The smallest cell size of the ortophotographic view was set to 1 mm. The orthophoto was created for the statue on the left side (Fig.2.6).



Fig. 2.6 Orthophoto of the object

The orthophoto has a reference to a geodetic coordinate system and looks like a picture. In the orthophoto it is possible to measure the position and dimensions of the object.

3. DIGITAL PHOTOGRAMMETRIC SYSTEM *INPHO*

Inpho is a digital photogrammetric system which was founded in 1980 by Friedrich Ackermann, the retired head of the Institute of Photogrammetry of Stuttgart University. *Inpho* is designed for processing a wide range of digital imagery: scanned aerial film frames, images from digital aerial cameras as well as images from various satellite sensors for all standard tasks in a digital photogrammetric project, including geo-referencing, DTM generation, orthophoto production and 3D feature collection (Lothhammer 2005 ; Available from internet: http://www.inpho.de).

The main advantages of *Inpho's* system are its rigorous mathematical modeling for top accuracy, and its smooth workflow and high degree of automation for supreme productivity (Available from internet: http://www.inpho.de).

The digital photogrammetric system *Inpho* as well as the digital photogrammetric system *PhotoMod* (see section 2.1) consist of several modules. The brief description about the main functions of each component will be given in further section.

3.1. The components of digital photogrammetric system *Inpho*

Inpho's digital photogrammetric workflow components are given in figure 3.1.

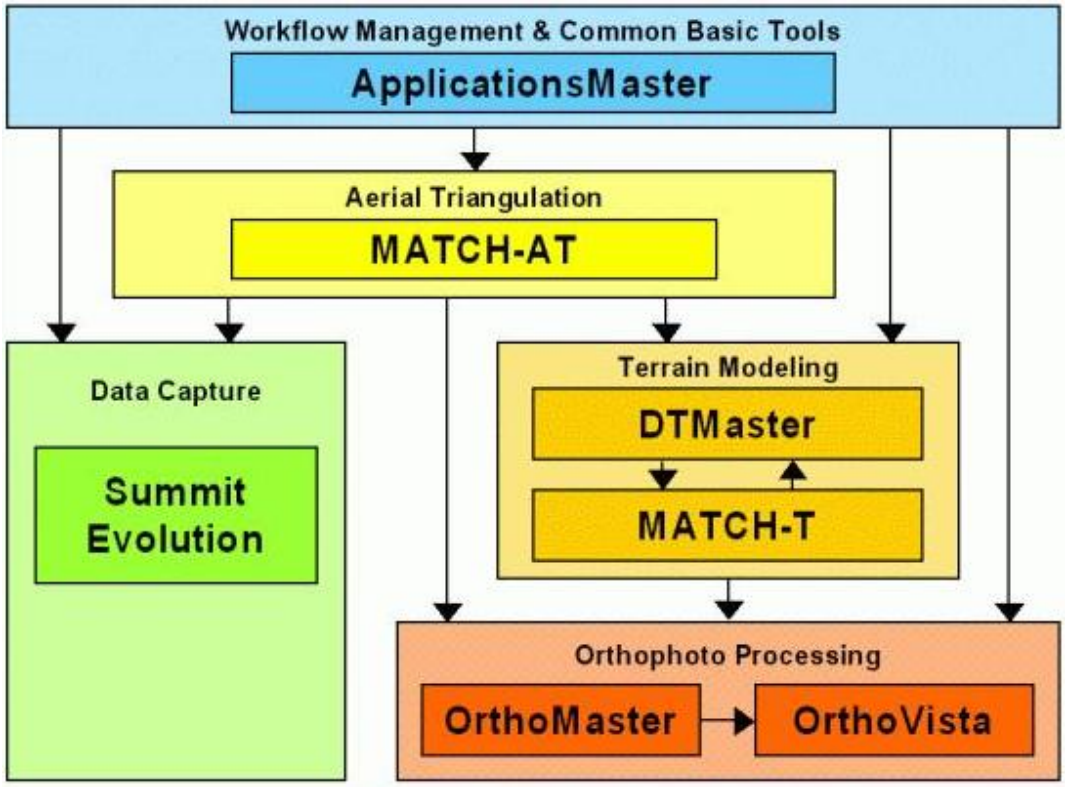


Fig. 3.1. *Inpho's* modules

The components of a digital photogrammetric workflow (see fig. 3.1) guarantee a high degree of automation (Lothhammer 2005).

ApplicationsMaster. The *ApplicationsMaster* is the core component of *Inpho's* photogrammetric system which integrates project generation and handling tools as well as application programs (*inBLOCK*, *MATCH-AT*, *MATCH-T DSM*, *DT-Master* and *OrthoMaster*) into one working environment (Inpho 2010).

The ApplicationsMaster provides by using tools to setup and edit a project, to generate image pyramids, to determine interior orientation parameters and to import and export exterior orientations and image coordinates from and into various formats. Furthermore, conversion modules allow translating 3rd party project files (e.g. BAE SocetSet projects) into *Inpho* files as well as converting TIFF-images into another format (e.g. scanline TIFF into tiled TIFF). Finally, single points/files or whole projects can be transformed into a different coordinate system using the transform tool just as digital elevation models can be tiled, filtered, interpolated, merged or converted into different formats utilizing the DTMToolkit (Inpho 2010).

MATCH-AT. By using this module of *Inpho's* digital photogrammetric software the full aerial triangulation for geo-referencing of any frame imagery from digital or analogue cameras in one automatic process, including point selection, point transfer and block adjustment could be done (Sigle, Heuchel 2001.; Available from internet: http://www.inpho.de).

MATCH-T (also named *MATCH-T DSM*). This module of *Inpho* is usable for an automated terrain and surface extraction providing highly precise digital terrain models and digital surface models derived from aerial or satellite imagery. The high dense of point clouds in urban and forest areas by using *MATCH-T* could be achieved. This module is designed for processing the most demanding photogrammetric projects with block sizes of 20000 images and even more (Available from internet: http://www.inpho.de).

DTMaster. *DTMaster* is designed for fast and precise DTM editing. *DTMaster* is available stand-alone, or as part of complete solutions for DTM generation by photogrammetry or *LIDAR* (Available from internet: http://www.inpho.de):

- *DTM Box* combines *DTMaster Stereo* with *MATCH-T*, *Inpho's* product for automatic DTM generation from aerial or satellite imagery;
- *LIDAR Box* combines *DTMaster* with *SCOP++ Kernel* and *SCOP++ LIDAR*, *Inpho's* products for advanced DTM processing and robust filtering of *LIDAR* data.

OrthoMaster. By using this module of *Inpho's* digital photogrammetric software the high quality orthophotos could be generated. The orthophoto could be generated from single image or blocks of images. In combination with *OrthoVista*, *OrthoMaster* is able to generate true orthophotos and true orthomosaics, in which all man-made 3D objects (e.g. buildings and bridges) are presented

in their true locations, without disturbing relief displacements (Available from internet: http://www.inpho.de).

OrthoVista. This module of Inpho is usable for automatic compensation of image intensity and color variations originated from the imaging process. *OrthoVista* computes radiometric adjustments that compensate for visual effects within individual images, such as hot spots, lens vignetting and color variations. Further, *OrthoVista* performs a blockwide color balancing by adjusting adjacent images to match in color and brightness. Multiple orthophotos are combined into one seamless, color balanced and geometrically perfect orthomosaic (Available from internet: http://www.inpho.de).

Summit Evolution. This module of *Inpho* is a digital photogrammetric stereo workstation and usable for vector data collection. Vector data could be collected directly into *ArcGIS*, *AutoCAD* or *MicroStation* softwares which are integral parts of *Summit Evolution* (Available from internet: http://www.inpho.de).

3.2. Accuracy control of photogrammetric work stages

The resolution of digital images has a direct influence on the accuracy of photogrammetric processes. In this case, all accuracy check thresholds are dependent on image resolution.

In general, the higher the resolution, the better the image quality and the better the results of photogrammetric processes.

As was mentioned before, the digital photogrammetric system is designed for aerial and satellite images processing. In this case, the following formulas of accuracy control are usable for aerial images (for satellite images the processing of those formulas is not advisable).

The accuracy control of measured tie points and ground control points *in the image*.

The residuals of the measurements in the images shows the displacement of the projection of the adjusted ground coordinates into the image compared to the measured image coordinate. The residuals of the image measurement on manual mode should correspond to the standard deviation (SDx,y) (Inpho 2010):

$$SD_{x,y} = 1/3 \times pixel\ , \quad (3.1)$$

where: pixel – pixel size of the camera (6.4 in units micron).

Accuracy control of ground control points measurements. The accuracy control of ground control points is based on calculation of residuals from given ground control points in terrain units (m) and from the adjusted ground control points.

In digital aerial triangulations (for processing aerial images), the achievable accuracy between adjusted ground control points planimetric coordinates and given ground control points coordinates can be calculated by followed formula (Inpho 2010):

$$OBJECT(X,Y) = 1/3 \times pixel \times image\ scale, \quad (3.2)$$

The accuracy in height could be computed according to the base/height ratio as a factor of the planimetry (Inpho 2010):

$$HEIGHT\ ACCURACY = OBJECT(X,Y) \times h/b, \quad (3.3)$$

where: h = focal length of the camera (mm); b = survey basis (mm).

Also the program calculate Root Mean Square (RMS) error with taking into account the residuals of adjusted ground control points and ground control points with given coordinates (see section 1.3).

Accuracy control of triangulation. The value of the standard deviation of unit weight (σ_0) shows the final result of aerial triangulation (see section 1.3) by making images processing with *Inpho* software. Standard deviation of unit weight at least should correspond to 1/3 pixel (Inpho 2010).

As is seen, the main formulas of accuracy control (3.1, 3.2 and 3.3) are based on image resolution.

The resolution of digital images (taken directly from digital camera) is much higher then the analogue images. As a result, the object surface (e.g. building facade) is represented by too many pixels. The tests have shown, that the in consequence of this, the matching of points could be failed and the accuracy results are not improved and might be made less by using this software. In this case, the accuracy control of using high resolution digital images could be less by changing the pixel identification accuracy in formulas 3.1 and 3.2. To made this, there is always need to keep a close watch on results during images processing for finding the best accuracy result of processed images.

Further in next section will be described the images processing procedure and the results of images processing. Also the brief discussion about the processing results will be given.

3.3. Processing of the images by using digital photogrammetric software *Inpho*

The digital images processing by using digital photogrammetric software *Inpho* was performed with that same images of the object, which were used for processing by digital photogrammetric software *PhotoMod* (see section 2.4) and with original images of that same object using new camera calibration parameters obtained with using scale bars after the camera calibration procedure (see section 6.4).

As we already know – the first step of the processing of scanned images is the interior orientation. Using *Inpho* photogrammetric software the determination of interior orientation is only required for digitized analogue images. While using digital images, the principal point coordinates are given directly from digital camera. The object images were taken by a digital camera and thus no interior orientation was necessary. The same applied to the *PhotoMod* photogrammetric software.

The coordinates of principal point are known from camera definition where the parameters of sensor geometry during new project creation were entered. The images which were used for processing were taken with that same digital camera *Canon EOS 1D Mark III*. In this case, the principal point coordinates are the same in both cases for corrected from the camera objective distortions images and for original images. The coordinates of principal point are x' = 2807.50 and y' = 1871.50 given in the unit pixels. The results of interior orientation is stored and can be seen only in project files *(*.prj)*.

In the next step of the images processing the image points of the ground control points and tie points were measured (but not in stereo mode like it was done by using *PhotoMod* software) in corrected from the camera objective distortions images and in the original images. In order to reach an equivalent comparison of the results, the same 10 ground control points and the 8 tie points were measured in manual mode like it was done by using *PhotoMod* software.

After the points were measured the computations of the aerial triangulation were made. In the first step of the aerial triangulation the a-priori accuracy of the image and the object point was set according to the above mentioned formulas provided by the system manufacturer (see 3.2 section) in both cases for corrected from camera objective distortions images and for original images. In this case, the results still indicated a slightly unbalanced weight of the involved observation types, image and object point measurements.

The images were taken with a 21MPixel camera. This high number of pixels leads to a far too high resolution of the object and does not correspond to the lower definition accuracy of points on the rough surface of the building's facade. As a consequence details on the facade are never better defined then within a few pixel and thus the formula given in section 3.2 does not hold.

In order to analyse the quality of the bundle adjustment, it is possible to calculate image coordinate residuals (corrections), standard deviations of object points and orientation data, correlations between parameters and reliability numbers for the detection of gross errors and also for results observing (Luhmann et al. 2006). In the followed tables the accuracy results of basic images processing steps for corrected from camera objective distortions images and for original images are given. These results lead to final result of the aerial triangulation. The accuracy of the image and the object point was set irrespective of the formulas given in section 3.2.

The displacement of the projection of the adjusted ground coordinate into the image compared to the measured image coordinate for corrected from camera objective distortions images and for original images is given in table 3.1.

Table 3.1. Residuals between adjusted coordinates and between measured coordinates in the images

General information				**Results**			
				***Before* camera calibration**		***After* camera calibration**	
Point ID	Point type	Number of images the point was measured in	Image ID	Residuals x, µm	Residuals y, µm	Residuals x, µm	Residuals y, µm
102	GCP	2	P915	0,2	0,0	-0,8	-1,8
			P912	-0,5	-0,2	0,4	1,8
105	GCP	3	P918	0,4	0,8	-0,5	0,9
			P915	0,3	0,0	-0,2	-0,5
			P912	-0,8	-0,9	0,5	-0,3
106	GCP	3	P915	0,4	-0,5	0,5	-1,2
			P912	-0,1	-0,2	-0,6	-0,2
			P918	-0,2	0,7	0,2	1,6
107	GCP	2	P912	-3,7	-1,3	-0,9	0,3
			P918	3,9	1,7	1,1	0,4
109	GCP	3	P915	-1,8	-2,1	-0,1	1,0
			P918	-0,1	-0,1	-0,7	-2,1
			P912	3,2	0,8	1,8	-0,5
110	GCP	2	P915	0,3	1,7	-0,5	1,0
			P912	-0,6	-1,3	-1,2	0,8

Table 3.1. continuation:

General information				**Results**			
				***Before* camera calibration**		***After* camera calibration**	
Point ID	Point type	Number of images the point was measured in	Image ID	Residuals x, µm	Residuals y, µm	Residuals x, µm	Residuals y, µm
111	GCP	3	P918	-2,9	-1,8	-1,1	-1,0
			P915	0,5	1,4	-0,5	0,8
			P912	2,1	0,9	1,2	0,3
600	GCP	2	P912	0,2	-2,0	0,0	0,1
			P915	-0,1	2,0	-0,1	0,1
602	GCP	3	P912	-0,5	1,6	-0,5	-0,8
			P918	0,1	-1,9	0,1	0,4
			P915	0,1	0,5	0,4	0,5
603	GCP	2	P918	-1,3	0,4	0,8	2,1
			P912	1,0	-0,3	-0,7	-2,2
901	TP	2	P915	0,0	-0,8	0,0	-0,7
			P912	0,0	0,8	0,0	0,7
902	TP	3	P918	1,7	1,4	0,9	1,0
			P915	-0,1	-1,0	0,9	0,3
			P912	0,3	-0,4	-1,7	-1,3
903	TP	3	P915	0,0	0,2	-1,0	-1,1
			P918	-0,1	0,2	-1,1	-3,0
			P912	0,1	-0,5	2,0	1,9
904	TP	2	P918	0,0	0,4	0,0	-1,3
			P912	0,0	-0,4	0,0	1,3
905	TP	3	P915	1,1	0,4	-0,2	0,3
			P918	1,1	-2,2	-0,2	-1,2
			P912	-2,3	1,8	0,3	0,9
906	TP	3	P912	1,7	1,5	1,2	-0,2
			P915	-0,9	-1,5	-0,6	0,8
			P918	-0,8	0,0	-0,6	-0,8

Table 3.1. continuation (1):

General information				**Results**			
				***Before* camera calibration**		***After* camera calibration**	
Point ID	Point type	Number of images the point was measured in	Image ID	Residuals x, µm	Residuals y, µm	Residuals x, µm	Residuals y, µm
908	TP	2	P912	0,0	0,0	0,0	0,8
			P915	0,0	0,0	0,0	0,7
909	TP	3	P915	0,0	-0,5	0,9	-1,6
			P912	0,0	0,4	-1,8	-0,7
			P918	0,0	0,2	0,9	1,0
Standard deviation				**1,3**	**1,1**	**0,8**	**1,2**

As it is seen from table 3.1, the maximum residuals (the worst points) of measured in corrected from camera objective distortions images are: x = 3,9 and y = -2,2 given in the units micron. These residuals are in points 107 and 905 (in images P918) respectively. Nevertheless of those maximum residuals in previous mentioned points, the standard deviation of all residuals is acceptable. The result of standard deviation of all measured points in corrected from the camera objective distortions images is: x = 1,3 and y = 1,1 given in the units micron. It could be stated that this step of images processing was successful and results are great.

The maximum residuals between adjusted and in the image space measured points in the original images which were used after camera calibration procedure are: x = 2,0 and y = -3,0 given in the units micron. These residuals are in point 903 (in the image P912 and P918) respectively. Despite the fact that residuals of those points are slighty higher from the other points - the result of standard deviation of all measured points in corrected from camera distortions images is: x = 0,8 and y = 1,2 given in the units micron. It could be stated that this step of images processing was successful and results are great.

The table 3.2 shows the residuals of measured the image points of the ground control points (X, Y, and Z) also for corrected from camera objective distortions images and also for original images.

Table 3.2. Residuals of measured the image points of the ground control point

General information		**Results**					
		***Before* camera calibration**			***After* camera calibration**		
Point ID	Number of images the point was measured in	Residuals X, m	Residuals Y, m	Residuals Z, m	Residuals X, m	Residuals Y, m	Residuals Z, m
102	2	-0,004	-0,002	0,002	-0,007	0,001	0,000
105	3	-0,002	-0,002	0,000	-0,004	0,002	0,002
106	3	0,001	-0,001	0,002	0,002	0,002	0,001
107	2	0,002	0,010	-0,010	0,005	0,011	0,000
109	3	0,016	-0,021	-0,017	0,016	-0,025	0,011
110	2	-0,004	0,007	0,006	-0,004	0,001	0,005
111	3	-0,002	0,007	0,014	-0,004	0,002	0,003
600	2	0,003	0,000	-0,002	-0,003	0,004	0,001
602	3	-0,004	0,003	0,000	-0,001	0,002	0,001
603	2	-0,005	0,001	0,005	0,001	-0,001	0,003
RMS		**0,006**	**0,008**	**0,008**	**0,006**	**0,009**	**0,004**

From previous table, the biggest discrepancy between adjusted ground control points planimetric coordinates and between given ground control points coordinates in the 109 point is seen. The biggest discrepancy in height accuracy is seen in the 109 point also. This high discrepancy in X, Y and Z coordinates in 109 point is in corrected from camera objective distortions images and in the original images. In consequence of the high discrepancies in the 109 point the values of RMS are higher. But the residuals calculated in the adjustment should not be used directly for the detection of outliers (Luhmann et al. 2006). In this case and in order to reach an equivalent comparison of the results, the 109 point was not eliminated from adjustments.

Despite the fact that the 109 point was not eliminated from adjustments, the value of the standard deviation (σ_0) which shows the final result of aerial triangulation is 0.5 in units micron (0.1 pixel size) for corrected from camera objective distortions images (before camera calibration) and in the original images (after camera calibration). The final result of aerial triangulation is great. The triangulation statistics and report of corrected from camera objective distortions images are given in appendix 2 and 3 respectively. The triangulation statistics and report of the original images are given in appendix 4 and 5 respectively.

4. BUNDLE BLOCK ADJUSTMENT *BLUH*

The work with a bundle triangulation program is an optimization process that finds the optimum positioning of the "image-network" in relation to the control point provided. As a result of diverse requirements and applications there are many different bundle adjustment packages on the market. As examples, for aerial applications there are (Luhmann et al. 2006):

- *PAT-B* (*PAT-M*) (University of Stuttgart, Germany) (Ackermann et. al. 1970);
- *BLUH* (University of Hannover, Germany) (Jacobsen 1982);
- *ORIMA* (Leica Geosystems, Switzerland)

and for close range photogrammetry (Luhmann et al. 2006):

- *BINGO* (*GIP*, Germany) (Kruck 1983);
- *STARS* (*GSI*, USA) (Fraser and Brown 1986);
- *CAP* (*K^2 Photogrammetry*, Germany) (Hinsken 1989);
- *ORIENT* (Technical University of Vienna, Austria) (Kager 1989);
- *PHIDIAS/BUN* (*PHOCAD*, Germany) (Benning and Schwermann 1997);
- *AX. ORI* (*AXIOS 3D*, Germany) (Hemken and Luhmann 2002).

The most famous ones for aerial applications are *PAT-B* and *BLUH* (Wiedemann et al. 2001).

The program system *BLUH* is optimized for aerial triangulation but not limited to this. Even close range images taken from all directions (with exception of omega = 80 - 120 grads) can be handled. *BLUH* software is based on the collinearity equation. Observations are photo coordinates, control point coordinates and (if available) coordinates of the projection centres (usually determined by relative kinematic GPS positioning). Unknowns are the photo orientations, object coordinates and additional parameters (if self calibration with additional parameters is specified for the program run) (Jacobsen 2009).

By using software package *BLUH* the bundle block adjustment of the images was done.

4.1. Purpose of bundle block adjustment

Bundle block adjustment (bundle triangulation, multi-image triangulation, multi-image orientation) is a method for the simultaneous numerical fit of an unlimited number of spatially disturbed images (bundle of rays). It makes use of photogrammetric observations (measured image points), survey observations and an object coordinate system. Using tie points, single images are merged into a global model in which the object surface can be reconstructed in three dimensions. The connection to a global object coordinate system can be provided by a minimum number of

ground control points. In this case, at least three control points should be used (Atkinson 2001). Larger areas without ground control points can be bridged by tieing the images to a photogrammetric block. The corresponding (homologous) point are called tie points and represent image rays that should intersect in their corresponding object point with minimum inconsistency (Luhmann et al. 2006).

In an over-determined system of equations, an adjustment technique estimates 3D object coordinates, image orientation parameters and any additional model parameters, together with related statistical information about accuracy and reliability. Since all observed (measured) values, and all unknown parameters of a photogrammetric project are taken into account within one simultaneous calculation, the bundle triangulation is the most powerful and accurate method of image orientation and point determination in photogrammetry (Luhmann et al. 2006).

By block adjustment the exterior orientation parameters of a block of images, as well as the ground coordinates of tie points, are determined simultaneously (Albertz, Wiggenhagen 2009).

The method is based on the mathematical model of perspective geometry, and uses directly the image coordinates as observations. For the computation the bundles of rays from the projection centres to the image points are established, according to the collinearity equations (Albertz, Wiggenhagen 2009):

$$x_i' = c_k \frac{a_{11}(X_i - X_0) + a_{21}(Y_i - Y_0) + a_{31}(Z_i - Z_0)}{a_{13}(X_i - X_0) + a_{23}(Y_i - Y_0) + a_{33}(Z_i - Z_0)}, \quad (4.1)$$

$$y_i' = c_k \frac{a_{12}(X_i - X_0) + a_{22}(Y_i - Y_0) + a_{32}(Z_i - Z_0)}{a_{13}(X_i - X_0) + a_{23}(Y_i - Y_0) + a_{33}(Z_i - Z_0)}, \quad (4.2)$$

where given are: c_k - focal length; X_i, Y_i, Z_i – coordinates of the ground control points;

measured: x_i , y_i – image coordinates;

unknowns: $X_0, Y_0, Z_0, \varphi, \omega, \kappa$ (the angles are included in the rotation matrix a_{ii}), X_i, Y_i, Z_i of the tie points.

$$\upsilon = A_1 \times x_1 + A_2 \times x_2 - l \ , \quad (4.3)$$

Adjustment with x_1= object coordinates and x_2= image orientation parameters.

In the followed sections the brief discussion about bundle adjustment by using for this purpose suitable software will be given.

4.2. The modules of *BLUH*

The program system *BLUH* has been written for handling in the command window (CMD). The program system has no dialogue and is subdivided into several program modules to ensure a flexible handling (Jacobsen 2009):

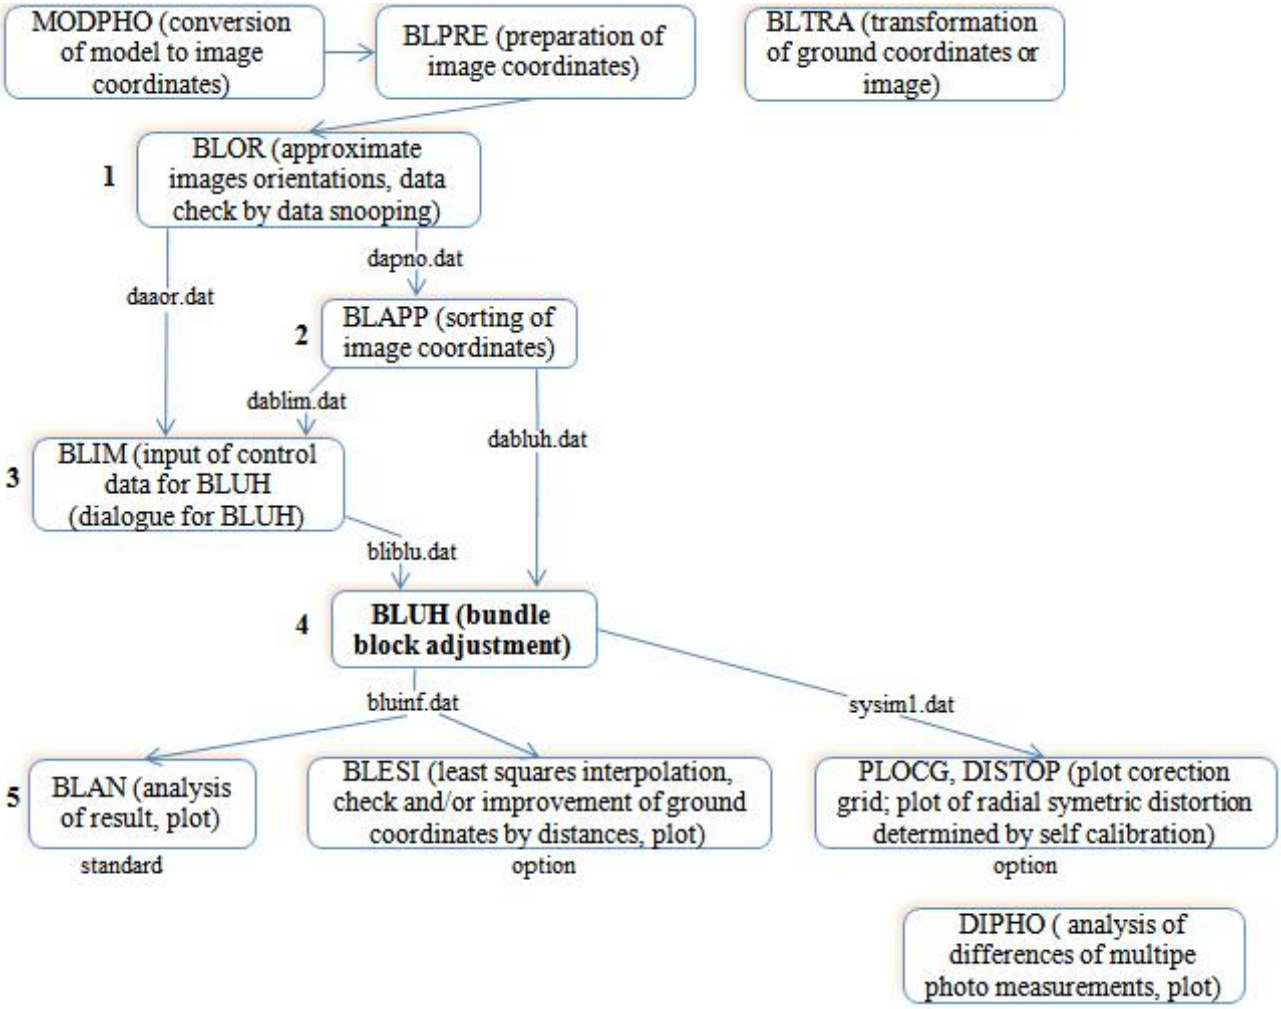


Fig. 4.1. The modules of *BLUH*

For the computation of a bundle block adjustment only the modules *BLOR*, *BLAPP*, *BLIM* and *BLUH* are necessary, they can be handled as one unique set or separately (in figure 4.1. they are marked with different colour). Even a batch handling of this group is possible or in can be included into a shell because the control data can be introduced not only by dialogue, it is also possible to introduce it by support files. The other modules can be used for special conditions, for analysis of the data and for other support of the data handling (Jacobsen 2009).

4.3. Results of the *BLUH* processing

After the adjustment in *Inpho* when the corrected from camera objective distortions images and the original images were processed, all measured image co-ordinates of each sub-block and ground control points coordinates were exported in a *BLUH* format. The two separate files for exportation were created. All observations (image coordinates, original ground control points coordinates) were adjusted in a bundle block adjustment.

In order to analyse the quality of the bundle block adjustment, the basic steps of computed results were observed (table 4.1, 4.2). The same manner the results for corrected from camera objective distortions images and for the original images were observed by processing images with digital photogrammetric softwares *PhotoMod* and *Inpho*.

Table 4.1. Residuals between adjusted coordinates and between measured coordinates in the images

General information				**Result**			
				***Before* camera calibration**		***After* camera calibration**	
Point ID	Point type	Number of images the point was measured in	Image ID	Residuals x, µm	Residuals y, µm	Residuals x, µm	Residuals y, µm
102	GCP	2	P915	0,0	0,2	0,0	-1,0
			P912	0,0	-0,2	0,0	1,1
105	GCP	3	P918	0,4	0,8	-1,3	-1,0
			P915	0,4	0,0	-1,3	-1,4
			P912	-0,8	-0,8	0,5	0,5
106	GCP	3	P915	0,1	-0,6	1,5	-1,2
			P912	-0,1	-0,1	-0,6	0,8
			P918	0,1	0,7	1,3	2,4
107	GCP	2	P912	0,0	-1,3	0,0	0,7
			P918	0,0	1,3	0,0	-0,7
109	GCP	3	P915	-1,2	-1,6	-0,6	1,1
			P918	-1,1	0,4	-0,7	0,4
			P912	2,3	1,2	1,3	-1,8
110	GCP	2	P915	0,0	1,5	-0,2	0,5
			P912	0,0	-1,6	0,2	-1,7

Table 4.1. continuation:

General information				**Result**			
				***Before* camera calibration**		***After* camera calibration**	
Point ID	Point type	Number of images the point was measured in	Image ID	Residuals x, µm	Residuals y, µm	Residuals x, µm	Residuals y, µm
111	GCP	3	P918	-0,8	-2,0	-1,4	-1,9
			P915	-0,8	1,4	-0,8	1,1
			P912	1,6	0,5	1,4	-0,3
600	GCP	2	P912	-0,1	-2,0	0,0	-1,4
			P915	0,1	2,0	0,0	1,4
602	GCP	3	P912	-0,3	1,7	-0,6	1,5
			P918	0,1	-1,9	1,2	-1,7
			P915	0,2	0,2	1,4	-1,9
603	GCP	2	P918	0,0	0,1	0,0	1,3
			P912	0,0	-0,1	0,0	-1,3
901	TP	2	P915	0,0	-0,6	-0,1	0,9
			P912	0,0	0,7	-0,1	-0,9
902	TP	3	P918	-0,2	1,5	-0,4	-1,6
			P915	-0,2	-1,2	-0,4	1,2
			P912	0,5	-0,3	0,5	0,9
903	TP	3	P915	-0,1	-0,1	0,0	-0,9
			P918	-0,1	0,3	-0,1	-0,8
			P912	0,2	-0,2	0,0	0,4
904	TP	2	P918	0,0	0,2	0,0	1,2
			P912	0,0	-0,2	0,0	-1,2
905	TP	3	P915	1,2	0,4	1,7	-0,6
			P918	1,2	-2,3	1,6	1,3
			P912	-2,4	1,9	-2,2	1,3
906	TP	3	P912	1,5	1,5	1,0	-1,1
			P915	-0,8	-1,5	-0,4	-1,8
			P918	-0,7	-0,1	-0,5	0,9

Table 4.1. continuation (1):

General information				**Result**			
				***Before* camera calibration**		***After* camera calibration**	
Point ID	Point type	Number of images the point was measured in	Image ID	Residuals x, µm	Residuals y, µm	Residuals x, µm	Residuals y, µm
908	TP	2	P912	0,0	-0,1	0,1	-1,4
			P915	0,0	0,1	-0,1	0,3
909	TP	3	P915	0,4	-0,7	1,6	-1,1
			P912	0,0	-0,1	-3,0	0,1
			P918	0,4	0,6	1,3	1,3
Standard deviation				**0,8**	**1,1**	**1,0**	**1,2**

As it is seen from previous table, the maximum residuals (the worst points) measured in corrected from camera objective distortions images are: x = -2,4 and y = -2,3 given in the units micron. These residuals are in the points 905 (in the images P912 and P918) respectively. Nevertheless of those maximum residuals in previous mentioned points, the standard deviation of all residuals is acceptable. The result of standard deviation of all measured points in corrected from camera objective distortions images is: x = 0,8 and y = 1,1 given in the units micron. This step of images processing was successful and results are great.

The maximum residuals between adjusted and in the image space measured points in the original images which were used after camera calibration procedure are: x = - 3,0 and y = 2,4 given in the units micron. These residuals are in the points 909 and 106 (in the images P912 and P918) respectively. The residuals in the other points are less. Nevertheless the result of standard deviation of all measured points in the original images is: x = 1,0 and y = 1,2 given in the units micron. This step of images processing was successful and results are great.

The table 4.2 shows the residuals of measured the image points of the ground control points (X, Y, and Z) for corrected from camera objective distortions images and for original images.

Table 4.2. Residuals of measured the image points of the ground control point

General information		**Result**					
		***Before* camera calibration**			***After* camera calibration**		
Point ID	Number of images the point was measured in	Residuals X, m	Residuals Y, m	Residuals Z, m	Residuals X, m	Residuals Y, m	Residuals Z, m
102	2	0,004	0,002	-0,009	-0,010	0,014	0,006
105	3	0,001	0,002	-0,001	0,007	-0,002	0,020
106	3	-0,002	0,001	-0,003	0,002	-0,011	0,009
107	2	0,001	-0,02	0,043	0,007	0,015	-0,009
109	3	-0,015	0,019	0,021	0,005	-0,011	0,010
110	2	0,004	-0,006	-0,012	-0,005	-0,012	-0,018
111	3	0,002	-0,005	-0,016	-0,005	-0,023	-0,013
600	2	-0,003	0,001	-0,002	-0,003	0,017	-0,021
602	3	0,003	-0,003	-0,001	0,006	-0,006	-0,006
603	2	0,004	-0,001	-0,011	0,015	0,006	-0,019
RMS		**0,005**	**0,009**	**0,017**	**0,007**	**0,013**	**0,014**

As can be seen from previous table, the residuals of measured the image points of the ground control points are very trifling for images which are corrected from camera objective distortions. Those same residuals for the original images are small to. The final result of bundle adjustment (σ_0) is 1.36 in units micron (0.3 pixel size) for corrected from camera objective distortions images (before camera calibration) and for the original images (after camera calibration). The bundle triangulation report of corrected from camera objective distortions images and of the original images are given in appendix 6 and 7 respectively.

5. ANALYZING PHOTOGRAMMETRIC SOFTWARE *AICON 3D STUDIO*

The analyzing software *AICON 3D Studio* is the one more software which was introduced and with which the digital camera *Canon EOS 1D Mark III* calibration procedure during Master thesis was done. Brief discussion about this system is given in followed sections.

5.1. Purpose of *AICON 3D Studio*

AICON 3D Studio is an analyzing software which is able to receive 3D data from different measuring systems and process them further. The *AICON 3D Studio* is a modular software. According to application range, the different modules of *AICON 3D Studio* are used. Due to the integration of different measuring modules, the *AICON 3D Studio* is an efficient control panel for different measuring instruments (Available from internet: http://www.aicon3d.de).

5.2. The modules of the analyzing photogrammetric software *AICON 3D STUDIO*

The analyzing photogrammetric software *AICON 3D Studio* consist of followed modules (Available from internet: http://www.aicon3d.de):

- *Digital Photogrammetric Analysis* (*DPA*) system;
- *DPS* system.

***DPA* system.** One of integrated measuring module into the *AICON* software is a *Digital Photogrammetric Analysis* (*DPA*) system. The *AICON's DPA* system is 3D measurement system using for following applications (AICON 3D Systems GmbH 2009; Available from internet: http://www.qfp-service.it):

3D inspection

• Inspection of sheet metal parts and tolerance analysis;

• Fixture inspection;

• Comparison with *CAD*;

• Roundness inspection, e.g. tunnels or tanks;

• Measurement of large steel fabricated structures.

3D process analysis

• Deformation analysis in vehicle safety tests;

• Deformation analysis of sheet metal and plastic parts, e.g. in environmental chambers or strain tests;

• Motion analysis, e.g. of components under loa.

Measuring principle. *AICON's DPA* system are portable 3D measuring machine that use a high resolution digital camera for data collection. The part, which may be of any size, is photographed from a number of directions. The images could be processed and above mentioned tasks could be made either simultaneously with data collection (online processing) or after data collection (offline processing) with *AICON's* software. The *AICON* software automatically calculates the 3D coordinates of all targeted points. The calculation is based on the principle of spatial image triangulation and is processed completely automatic. In addition to 3D coordinates, *DPA* provides statistical analysis of the results with specific accuracy information about each coordinate (Available from internet: http://www.qfp-service.it).

DPS system. *DPS* system is the other one of integrated measuring module into the *AICON* software. Combined with the *DPS* system, it serves as optical 3D positioning equipment that controls the 3D position of the dummy relative to the vehicle during the positioning process. With the help of measuring points or adapters, the current dummy position is recorded in real time, and compared to nominal data.

With all points on the dummy measured and displayed simultaneously in vehicle coordinates, the technician can quickly put the dummy into its target position. Movements of the vehicle that are caused by the positioning of the dummy are compensated automatically because of continuous monitoring of a set of targeted reference points.

The system allows for the measurement of additional coordinates of single points, lengths or angles with the probe according to a predefined measuring plan. The results are shown in a measurement report. Further individual processing via an XML export is available (Available from internet: http://www.aicon3d.de).

By using *AICON's DPA* system the digital camera *Canon EOS 1D Mark III* calibration procedure was done. About camera calibration procedure is written in chapter 6.

6. CAMERA CALIBRATION

The primary objective of photogrammetry is to generate spatial and descriptive information from two-dimensional imagery (Habib et al. 2005). The accuracy obtainable in digital images processing depends on the scale and type of image, the instruments used, the skill of the compiler, the density of ground control points, the amount of terrain surface, and the nature of the vegetative cover. These factors relate to the data taken from the images (Available from internet: http://www.blm.gov). Thus, the images acquisition is the first step which leads to a high accuracy of images processing.

The images for photogrammetric purpose are taken by the analogue or digital photo cameras. In order to generate reliable and accurate information from images, photo cameras usually are calibrated before using them (Sužiedelytė-Visockienė, Bručas 2009).

Next in this chapter will be discussed about the purpose of camera calibration and the calibration procedure of non-metric digital photo-camera *Canon EOS 1D Mark III*. The calibration results will be given in the last section.

6.1. The goal of a camera calibration

The purpose of camera calibration is to determine the geometric camera model described by the parameters of interior orientation (Luhmann et al. 2006; Schenk 2005):

- Principal distance;
- Focal length of the camera;
- Image coordinates of principal points;
- Radial distortion;
- Tangential (asymmetric or decentring) distortion;
- Affinity and shear of the image coordinate system;
- Other additional parameters.

There are 3 different camera calibration methods characterised by the reference object used and by the time and location of calibration (Luhmann et al. 2006; Sužiedelytė-Visockienė, Bručas 2009):

- Laboratory calibration. Interior orientation parameters are determined by goniometers, collimators or other optical alignment techniques where imaging direction or angles of light rays are measured through the lens of the camera. The advantage of this method is that the calibration takes place under laboratory conditions and hence better accuracy at defining of

unknown quantities is achieved. Laboratory calibration is generally only used for metric cameras and is using before surveying.

- Test field calibration. This type of calibration is based on a suitable targeted field of object points with known coordinates and distances. The images of a test-field are taken from different positions and directions from several camera stations (the number of cameras stations depends on test field size), ensuring good ray intersection and filling the image format. The neighbour images should be overlapped. Measured image coordinates and approximately known object data are processed by bundle adjustment to give the parameters of the camera model (interior orientation) as well as the adjusted test field coordinates and the parameters of exterior orientation. Test fields can be mobile, or stationary.
- Self-calibration. For this type of calibration the images acquired for the actual object measurement are used. In this case the test field is replaced by the actual object which must be imaged under conditions similar to those required for test field calibration itself (spatial depth, tiled images and suitable ray intersections). Self-calibrations do not require coordinates of known reference points. The parameters of interior orientation can be calculated solely by the photogrammetric determination of the object shape. If employed, reference points can be used to define a particular global coordinate system for the parameters of exterior orientation.

The camera calibration procedure can be divided into several stages: test-field target images making, processing of the resulting images and estimation of the camera parameters (Sužiedelytė-Visockienė, Bručas 2009).

Determining the parameters of photo cameras (cameras calibration) is absolutely necessary for the successful images processing (Sužiedelytė-Visockienė, Bručas 2009).

In the next section will be written about non-metric camera *Canon EOS 1D Mark III* calibration procedure.

6.2. Measurements for the digital camera calibration

The non-metric camera *Canon EOS 1D Mark III* (see section 2.4) calibration was performed in the photogrammetric laboratory at Neubrandenburg University of Applied Sciences (Germany) using 3D test-field (fig. 6.1).



Fig. 6.1. Test-field for the camera calibration

The field consists of retroreflective targets with known coordinates and distances and of two calibrated scale bars with precisely known distance between points. In order to get spatial information some points are arranged on a stamp at the top of the plane (Abraham 2004).

In order to capture all types of distortions and stabilize the determination of the focal length (especially when using longer focal lengths) the images were taken:

- in different orientations. At each station, the camera was rotated around its optical axis by 0^o, 90^o and -90^o ;
- in different inclinations.

The cameras position with used different orientations and inclinations is given in figure 6.2.

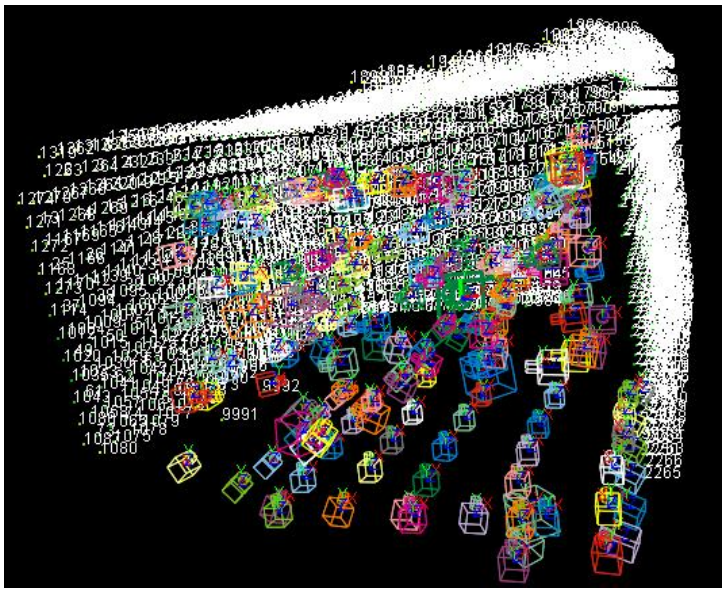


Fig. 6.2. Photo camera position

All automated camera parameters (zoom, auto focus, aperture, white balance, etc.) were kept constant during data capture (were turned off) (Wojtas 2010; Sanz-Ablanedo et al. 2010). The 185 images taken in that case for successful processing of calibration were used.

6.3. Computation of the digital camera calibration parameters

The images were processed and computations of camera calibration parameters were made with software *AICON* (see chapter 5). In order to evaluate the differences between calibration parameters and to estimate the necessity of using scale bars, the images were processed in two different ways:

- including scale bars for the images processing;
- not including scales bars in the images processing.

During the adjustment procedure the software created an approximate 3D model of the points marked on the test-field. The coordinates are required to number the retroreflective targets (including the scale bars), that are detected in the image and to set up correspondences between the targets in different images (fig. 6.3.).



Fig. 6.3. Numbered targets

The numbers of the points are always unique, otherwise the result of the bundle adjustment alignment will be inadequate (Sužiedelytė-Visockienė, Bručas 2009).

The accuracy of the result is defined by the mean value in the coordinate list for X, Y and Z in units mm, RMS also for X, Y and Z in units mm and standard deviation of the weight unit (σ_0) in units micron. The standard deviation (σ_0) shows the mean point measurement accuracy for all images of the adjustment statistics. The accuracy results of calibration are given in table 6.1.

Table. 6.1. Results of bundle block adjustment

Accuracy, µm	**Calibration *with using scale bars***	**Calibration *without using scale bars***
E_{mean}^{XY}	4.5	3.2
E_{mean}^{Z}	2.5	2.1
RMS xy	5.0	4.0
RMS z	3.4	3.1
σ_0	5	5

The software manufacturers have not listed the value which shows the successful adjustment. It is only stated, that the mean values and the RMS values should have similar sizes for X, Y and Z. The RMS value should be slightly higher then the mean value. However, the final result of bundle adjustment of all images (with scale bars and without it) is 5 in units micron. According the estimated σ_0 value it could be stated that the results of camera calibration in both ways are great (AICON 3D Systems GmbH 2009).

6.4. Results of the digital camera calibration

The interior orientation and lens distortion parameters of the camera, i.e. principal distance c, principal point offset x_0/y_0, radial-symmetric and tangential distortion coefficients were calculated simultaneously with the numerical 3D reconstruction process by bundle adjustment (Peipe, Stephani 2003). Calibration results and precision parameters of camera are given in table 6.2.

Table. 6.2. The new calibration results of the digital camera *Canon EOS 1D Mark III*

Parameters	***Results***	
	With using scale bars	***Without using scale bars***
Focal length (mm)		
c	50,7930	50,7931
The base point corrections of the photo-camera		
x_0	-0,2282	-0,2324
y_0	0,2019	0,2026

Table. 6.2. continuation:

Parameters	***Results***	
	With using scale bars	***Without using scale bars***
Radial-symmetric distortion of the photo-camera		
A1	-6,4466E-05	-6,4508E-05
A2	4,1312E-08	4,1565E-08
A3	2,8812E-11	2,8407E-11
Radial-asymmetric distortion of the photo-camera		
B1	-7,1262E-05	-7,2810E-06
B2	-2,5987E-06	-2,5725E-06
Affinity/Orthogonality		
C1	1,3696E-03	1,3715E-03
C2	-2,5531E-05	-2,6262E-05

As can be seen from the previous table, the values of cameras interior orientation parameters which are estimated using scale bars and without them are very similar: differences between the focal length (c) in both cases is +- 0,0001 in units mm; x_0 = +- 0,0042 in units mm; y_0 = +- 0,0007 in units mm. The differences between the radial-symmetric and between the radial-asymmetric distortions are very small: A1=+- 4,2000e-08; A2=+- 2,5300E-10; A3=+- 4,0500E-13; B1= +-6,3981E-05; B2= +- 2,6200E-08; C1= +- 1,9000E-06; C2= +- 7,3100E-07. The previous values have no dimension.

Thus, both camera calibration parameters (see table 6.2) could be used for correction of the camera optical errors in images.

However, digital cameras are not manufactured specifically for the purpose of photogrammetric mapping, and thus have not been built to be as stable as traditional mapping cameras. If a camera is stable, then the derived internal orientation parameters should not vary over time. The test, which were made with digital cameras showed, that the internal orientation parameters was stable as long as no zoom and no auto focus were used after the camera calibration (Habib et al. 2008; Läbe, Förstner 2004).

7. THE RESULTS ANALYSIS OF PROCESSED IMAGES AND THE DIGITAL CAMERA CALIBRATION PARAMETERS

The corrected from camera objective distortions digital images and the original digital images after camera calibration procedure during the research work were processed. The digital images were processed by using digital photogrammetric softwares *PhotoMod* and *Inpho* which are developed for processing a wide range of digital imagery such as scanned aerial film frames, images from digital aerial cameras as well as images from various satellite sensors. By using those systems not only the bundle adjustment but also DTM, digital maps and orthophotos creation could be performed. The other one system by using which the bundle adjustment procedure was performed is *BLUH*. *BLUH* system is developed only for bundle triangulation and can be used for close range images taken from all directions.

It should be noted that the corrected from camera objective distortions digital images were processed by using both digital photogrammetric softwares (*PhotoMod* and *Inpho)* and the original images after camera calibration procedure were processed by using just digital photogrammetric software *Inpho.* The system *BLUH* was used for both types of the images processing.

Further in next sections the result analysis of processed images will be performed. Also, the comparison between old camera calibration parameters and between new camera calibration parameters will be given.

7.1. Aerial triangulation results analysis before camera calibration

In this section the results analysis of processed digital images which were corrected from camera objective distortions is performed.

The results of standard deviation between adjusted and measured points in image space were observed. The summerised results of calculated discrepancies (residuals) between adjusted points coordinates and between measuerd coordinates in image space is given in tabale 7.1.

Table. 7.1. Comparison of standard deviation between adjusted and between measured points in image space

Software	Images	Tie points	Control points	Standard Deviation, x (μm)	Standard Deviation, y (μm)
PhotoMod	3	8/8	10/10	0,4	1,1
Inpho	3	8/8	10/10	1,3	1,1
BLUH	3	8/8	10/10	0,8	1,1

As it can be seen from previous table, the results have slight differences only in x plane. The best result in image measurements was achieved with *PhotoMod.* Nevertheles the results reached with *PhotoMod, Inpho* and *BLUH* correspond accuracy requirements for measurements in image space: the values do not exceed 1,0 in units micron.

In order to make comparison of bundle triangulation results the same three images for processing were used. Also the 10 GCP were measured in manual mode. As a priori value, the standard deviation of the ground control points were set as 0,02 in units meters for X, Y and Z to guarantee the same conditions for all adjustments. The results of bundle triangulation are summarised in table 7.2.

Table. 7.2. Bundle triangulation results

Software	Images	Control points	σ_0, μm	RMS X, m	RMS Y, m	RMS Z, m
PhotoMod	3	10/10	-	0,002	0,003	0,008
Inpho	3	10/10	0,5	0,006	0,008	0,008
BLUH	3	10/10	1,36	0,005	0,009	0,017

The *PhotoMod* does not show (compute) the σ_0 value. In this case, the comparison of results could be done to the RMS values which also show the triangulation result. Thus, the results were similar for all systems, but with slight differences in the planimetry and heights. The best results with respect to the RMS of the control points were achieved with *PhotoMod*.

Performing comparison to $\sigma_0$value, best result was achieved with *Inpho* software (0,5 in units micron). The result for *BLUH* is slightly worse (1,36 in units micron). Nevertheles the result of bundle adjustment is good for both softwares, because the accuracy reaches 0,1 and 0,3 pixel size respectively. Also, according to the RMS values given in table 7.2, the assumption about dependence between RMS values and between the results of σ_0 could be made. In this case, the result of σ_0 with *PhotoMod* could be better than with *Inpho* and *BLUH.*

7.2. Aerial triangulation results analysis after camera calibration

In this section the results analysis of processed original digital images which were used after camera calibration is performed.

The results of standard deviation between adjusted and measured points in image space were observed. The summerised results of calculated discrepancies (residuals) between adjusted coordinates and measuerd coordinates in image space is given in tabale 7.3.

Table. 7.3. Comparison of standard deviation between adjusted and between measured points in the image space after camera calibration procedure

Software	Images	Tie points	Control points	Standard Deviation, x (μm)	Standard Deviation, y (μm)
Inpho	3	8/8	10/10	0,8	1,2
BLUH	3	8/8	10/10	1,0	1,2

As it can be seen from table 7.3, the results achieved with *Inpho* and *BLUH* correspond accuracy requirements for measurements in image space: the values do not exceed 1,0 in units micron.The better result is achieved with *Inpho*.

In order to make comparison of bundle triangulation results using original digital images after camera calibration procedure the 10 GCP were measured in manual mode. As a priori value, the standard deviation of the ground control points were set as 0,02 in units meters for X, Y and Z to guarantee the same conditions for all adjustments. The results of bundle triangulation are summarised in table 7.4.

Table. 7.4. Bundle triangulation results after the camera calibration procedure

Software	Images	Control points	σ_0, μm	RMS X, m	RMS Y, m	RMS Z, m
Inpho	3	10/10	0,5	0,006	0,009	0,004
BLUH	3	10/10	1,36	0,007	0,013	0,014

The final result of aerial triangulation (σ_0) was achieved 0.5 in units micron (0.1 pixel size) and 1,36 in units micron (0.3 pixel size) by using digital photogrammetric software *Inpho* and system *BLUH* respectively. The accuracy result reached with *Inpho* and *BLUH* meets the accuracy requirements.

7.3. Comparison of aerial triangulation results before camera calibration and after camera calibration

In this section the results comparison of processed digital images before camera calibration (by using corrected from camera objective distortions digital images) and after camera calibration (by using the original digital images) is given. Because of the original digital images was not processed by using digital photogrammetric system *PhotoMod* – the system in results comparison was not involved.

The results of standard deviation between adjusted and measured points in image space during digital images processing were observed. The summerised results of calculated discrepancies (residuals) between adjusted coordinates and measuerd coordinates in image space before camera calibration and after camera calibration is given in tabale 7.5.

Table. 7.5. Comparison of standard deviation between adjusted and between measured points in image space before and after camera calibration

General information				Result			
				Before camera calibration		*After* camera calibration	
Software	Images	Tie points	Control points	Standard Deviation, x (μm)	Standard Deviation, y (μm)	Standard Deviation, x (μm)	Standard Deviation, y (μm)
Inpho	3	8/8	10/10	1,3	1,1	0,8	1,2
BLUH	3	8/8	10/10	0,8	1,1	1,0	1,2

As it can be seen from previous table, the results of this measurement step achieved by using digital photogrammetric softwares *Inpho* and *BLUH* are very similar in both cases: before camera calibration in corrected from camera objective distortions images and after camera calibration in the original images. But the better result in x and y planes is achieved by using the original digital images after camera calibration procedure which were processed with *Inpho* software. The result achieved with *BLUH* system by using the original digital images after camera calibration procedure is slightly higher in x plane.

In this step of images processing the best result was achieved with *BLUH* system by using corrected from camera objective distortions digital images before camera calibration procedure.

The summarized bundle triangulation results by using corrected from camera objective distortions digital images and the original digital images are given in the table 7.6

Table. 7.6. Comparison of bundle triangulation results before and after camera calibration procedure

General information			Result							
			Before camera calibration				*After* camera calibration			
Software	Images	Control points	σ_0, μm	RMS X, m	RMS Y, m	RMS Z, m	σ_0, μm	RMS X, m	RMS Y, m	RMS Z, m
Inpho	3	10/10	0,5	0,006	0,008	0,008	0,5	0,006	0,009	0,004
BLUH	3	10/10	1,36	0,005	0,009	0,017	1,36	0,007	0,013	0,014

As it is seen from table 7.6, the results of RMS achieved by using digital photogrammetric software *Inpho* are very similar in both cases: before camera calibration in corrected from camera objective distortions images and after camera calibration in the original images. Though, the better result in planimetry is achieved by using corrected from camera objective distortions digital images (before camera calibration procedure) and the twice better result in height is achieved by using the original digital images (after camera calibration procedure). The final result of bundle adjustment is the same before camera calibration procedure and after camera calibration procedure.

Very similar distribution of the results of RMS and of the final adjustment result is achieved by using system *BLUH* (see table 7.6). The better result in planimetry is achieved by using corrected from camera objective distortions digital images (before camera calibration procedure) and the better result in height is achieved by using the original digital images (after camera calibration procedure). The final result of bundle adjustment is the same before camera calibration procedure and after camera calibration procedure.

The best result of bundle adjustment was achieved with digital photogrammetric software *Inpho* after camera calibration procedure by using the original digital images.

7.4. Comparison of camera calibration parameters

In this section the comparison between the old digital camera *Canon EOS 1D Mark III* calibration results and between the results which were got during research work is made. Comparison of camera calibration parameters is given in table 7.7.

Table. 7.7. Comparison of camera calibration parameters

Parameters	**Results**		
	The old calibration	***Calibration performed during research work***	
		With using scale bars	*Without using scale bars*
Focal length (mm)			
c	50,7583	50,7930	50,7931
The base point corrections of the photo-camera (mm)			
x_0	-0,0495	-0,2282	-0,2324
y_0	-0,2559	0,2019	0,2026
Radial-symmetric distortion of the photo-camera			
A1	–1.789E-09	-6,4466E-05	-6,4508E-05
A2	-	4,1312E-08	4,1565E-08
A3	-	2,8812E-11	2,8407E-11

Table. 7.7. continuation:

Parameters	**Results**		
	The old calibration	***Calibration performed during research work***	
		With using scale bars	*Without using scale bars*
Radial-asymmetric distortion of the photo-camera			
B1	1,0170E-05	-7,1262E-05	-7,2810E-06
B2	–1.655E-8	-2,5987E-06	-2,5725E-06
Affinity/Orthogonality			
C1	-	1,3696E-03	1,3715E-03
C2	-	-2,5531E-05	-2,6262E-05

The camera calibration procedure was performed at the Institute of Photogrammetry in Bonn University (Germany) in 2008 before (the results of this calibration are listed in column named “The old calibration”). As can be seen from the previous table, the values between the old camera calibration interior orientation parameters and between the new calibration interior orientation parameters are very differ. Also, the difference between amount of computed parameters is seen. However, the differences between the proportion of the obtained values of calibration parameters and between amount of computed calibration parameters in both cases (in old calibration and in new calibration) do not mean bad result, because the computations of parameters were performed by using different softwares and different technique during images taking process. Also, there are no standards for calibration reports of digital cameras at the moment. In this case, the camera calibration parameters which should be entered during project creation process depending on the software which is using for images processing. The camera calibration parameters which were need to enter in the digital photogrammetric softwares *PhotoMod* and *Inpho* during project creation process and the camera calibration parameters which were need to enter in system *BLUH* are given in table 7.8.

Table. 7.8. Camera calibration parameters in *PhotoMod*, *Inpho* and *BLUH*

Software	**Camera calibration parameters**								
	Focal length (c)	The base point corrections of the photo-camera (x_0, y_0)	Radial-symmetric distortion of the photo-camera			Radial-asymmetric distortion of the photo-camera		Affinity/Orthogonality	
			A1	A2	A3	B1	B2	C1	C2
PhotoMod	+	+	+	+	+	-	-	-	-
Inpho	+	+	+	+	+	-	-	-	-
BLUH	+	-	-	-	-	-	-	-	-

As it is seen from previous table, the same number of introduction of camera calibration parameters is required for *PhotoMod* and *Inpho* softwares.

It should be noted when the corrected from camera distortions digital images were used – only calibrated focal length (c) was need to enter during project creation in *PhotoMod* and *Inpho* softwares. Also, because the points measurements in the images were performed with digital photogrammetric system, the system *BLUH* requires to enter only calibrated focal lenght (c).

CONCLUSIONS

1. The digital images of the culture heritage fasade which were corrected from the digital camera *Canon EOS 1D Mark III* objective distortions were processed using digital photogrammetric system *PhotoMod*. After aerial triangulation was done, the root mean square between in images by stereo mode measured ground control points and between in geodetic method measured ground control points were detected: RMS X = 0,002 in units metres, RMS Y = 0,003 in units metres and RMS Z = 0,008 in units metres. Using this software in addition, the break lines of the object were plotted and the orthophoto was generated.

2. The digital images of that same object which were corrected from the digital camera *Canon EOS 1D Mark III* objective distortions were processed using digital photogrammetric system *Inpho*. After aerial triangulation was done, the root mean square between in images not by stereo mode measured ground control points and between by geodetic method measured ground control points were detected: RMS X = 0,006 in units metres, RMS Y = 0,008 in units metres and RMS Z = 0,008 in units metres. The value of σ_0 is equal to 0.5 in units micron.

3. The tie points which were measured in that same digital images of the object which were corrected from the digital camera *Canon EOS 1D Mark III* objective distortions using software *Inpho* and by geodetic method measured ground control points for further processing were transformed to bundle adjustment designed software *BLUH*. After aerial triangulation was done, the root mean square between in images not by stereo mode measured ground control points and between by geodetic method measured ground control points were detected: RMS X = 0,005 in units metres, RMS Y = 0,009 in units metres and RMS Z = 0,017 in units metres. The value of σ_0 is equal to 1.36 in units micron.

4. The calibration of the digital camera *Canon EOS 1D Mark III* (50 mm objective-lens) was performed in a specialy designed calibration laboratory at Neubrandenburg University of Applied Sciences in Germany. Significant differences between the old calibration parameters (obtained three years ago) and between the new results, obtained by the author in this master work, were not found. It means that the parameters which were set during camera calibration procedure three years ago were not changed during all the time the camera was used in this work.

5. By using new camera calibration parameters the aerial triangulation procedure was repeated using digital photogrammetric system *Inpho*. For this purpose the original digital images (not corrected from the digital camera *Canon EOS 1D Mark III* objective distortions) of that same object were used. After aerial triangulation was done using software *Inpho*, the root mean square between in images not by stereo mode measured ground control points and between by geodetic method measured ground control points were detected: RMS X = 0,006 in units metres, RMS Y =

0,009 in units metres and RMS Z = 0,004 in units metres. The value of σ_0 is equal to 0,5 in units micron.

6. By using the new camera calibration parameters the tie points, which were measured in that same original digital images of the object using software *Inpho* and by geodetic method measured ground control points for further processing were transformed to bundle adjustment designed software *BLUH*. After aerial triangulation was done, the root mean square between in images not by stereo mode measured ground control points and between by geodetic method measured ground control points were detected: RMS X = 0,007 in units metres, RMS Y = 0,013 in units metres and RMS Z = 0,014 in units metres. The value of σ_0 is equal to 1.36 in units micron.

7. The results of aerial triangulation which were obtained by using all examined softwares meet accuracy requirements. According to this, it can be stated that the digital photogrammetric systems *PhotoMod* and *Inpho* which are developed for processing scanned aerial film frames, images from various satellite sensors could be used for close-range digital images processing too.

8. During the digital images processing procedure it was established that formulas given for accuracy control by software‘s manufacturers not allways hold on. Thus, there are an importance for operator experience and skills during digital close-range images processing procedure.

REFERENCES

Abraham S. 2004. Tcc – a software for test field based self-calibration of multi-camera-systems. Institut für Photogrammetrie, Universität Bonn. 39 p.

AICON 3D Systems GmbH. 2009. AICON 3D Studio user Manual. Braunschweig, Germany. 14-9.

Albertz J.; Wiggenhagen M.. 2009. Guide for Photogrammetry and Remote Sensing. Hamburg, Germany. 334.

Atkinson, K.B. 2001. Close Range Photogrammetry and Machine Vision. Scotland, UK. 363.

Habib A.; Jarvis A..; Detchev I.; Stensaas G.; Moe D.; Christopherson J. 2008. Standards and specifications for the calibration and stability of amateur digital cameras for close-range mapping applications. *The International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences,* Vol. XXXVII. Part B1. Beijing. 1059 – 1064.

Habib A. F.; Pullivelli A. M.; Morgan M. 2005. Quantitative measures for the evaluation of camera stability. *Society of Photo-Optical Instrumentation Engineers.* Calagary, Canada.

Inpho. 2010. ApplicationsMaster Manual for Version 5.3 and higher. 363.

Inpho. 2010. Match-AT Manual for Version 5.3 and higher. 244.

Jacobsen, K. 2001. PC-Based Digital Photogrammetry. Damaskus, GORS.

Jacobsen K. 2009. Program system *BLUH*: User Manual. Hannover, Germany. 21.

Kersten, T. 1999. Results of digital aerial triangulation using different software packages. *OEEPE Workshop on Automation in Digital Photogrammetric Production*, No. 37, 241-256.

Kiseleva, A.S. 2002. Accuracy control at various stages of photogrammetric processing in *PhotoMod* system. Moscow.

Läbe, T.; Förstner, W. 2004. Geometric stability of low-cost digital consumer cameras. *The International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, 35(B1). 528 – 534.

Lothhammer, K. L. 2005. Photogrammetric workflow: the *Inpho* approach. Bogotá, Colombi.

Luhmann T.; Robson S.; Kyle S.; Harley I. 2006. Close range photogrammetry: principles, Methods and Applications. Scotland, United Kingdom. 510.

Madani, M. 2001. Importance of Digital Photogrammetry for a complete GIS. 5th Global Spatial Data Infrastructure Conference. Cartagena, Columbia.

Peipe J.; Stephani M. 2003. Performance evaluation of a 5 Megapixel digital metric camera for use in architectural photogrammetry. *The International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, Vol. XXXIV, Part 5/W12. 259-261.

Racurs. 2009. Software *PhotoMod* 4.4 Module Aerial Triangulation user manual. Moscow. 161.

Racurs. 2009.Software *PhotoMod* 4.4 Module *PhotoMod* DTM user manual. Moscow. 75.

Racurs. 2009.Software *PhotoMod* 4.4 Module *PhotoMod* Solver user manual. Moscow. 77.

Racurs. 2009. Software *PhotoMod* 4.4 Module *PhotoMod* Stereo Draw user manual. Moscow. 123.

Ruzgienė B. 2008. Fotogrametrija. Vilnius: Technika. 2008. 204.

Sanz-Ablanedo E.; Rodríguez-Pérez J. .; Armesto J.; Taboada M. F. Á. 2010. Geometric Stability and Lens Decentering in Compact Digital Cameras. *MDPI journal: Sensors.* 1553-1572.

Schenk, T. 1999. Digital photogrammetry, Volume 1. Dayton, Ohio, USA. 421.

Schenk T. 2005. Introduction to Photogrammetry. USA. 95.

Shariat M., Azizi A., Saadatseresht M., 2008. Analysis nand the solutions for genetaring a true digital ortho photo in close range photogrammetry. *The International Archives of the Photogrammetry, Remote Sensing and Spastial Information Sciences.* Vol XXXVII, Part B4, Beijing, 439-442.

Sigle M.; Heuchel T. 2001. *MATCH-AT*: Recent Developments and Performance. *Photogrammetric week 01*. 189-194.

Sužiedelytė-Visockienė, J.; Bručas, D. 2009. Digital photogrammetry for building measurements and reverse-engineering. *Geodesy and Cartography,* 35(2), 61–65.

Sužiedelytė-Visockienė, J.; Bručas, D. 2009. Influence of digital camera errors on the photogrammetric image processing. *Geodesy and Cartography*, t.35, No. 1, 29-33.

Sužiedelytė-Visockienė, J.; Kumetaitienė A.; Bagdžiūnaitė R. 2011. Accuracy analysis of different surface reconstruction modelling methods of heritage objects, digitalized according to photogrammetric data. *Environmental Engineering, Volme 3.* The 8th International Conference, 1493.

Wiedemann A. 2005. Digital Architectural Photogrammetry for Building Registration. Berlin, Germany.

Wiedemann A.; Moré J.; Suthau T.; Theodoropoulou I.; Weferling U.; Ergün B. 2001. Comparison of bundle block adjustments for close range applications. *Fourth Turkish-German Joint Geodetic Days*. Paper presented to the conference organized at Berlin, Germany, April 2-6, Vol I, 211-218.

Wojtas A. M. 2010. Off-the-shelf close-range photogrammetric software for cultural heritage documentation at Stonehenge. *International Archives of Photogrammetry, Remote Sensing and Spatial Information Sciences*, Vol. XXXVIII, Part 5. Commission V Symposium, Newcastle upon Tyne, UK. 603-607.

Web pages:

Analyzing photogrammetric software *AICON 3D Studio* [Accessed 2011-04-28]. Available from internet:

http://www.aicon3d.de/start.html

3D measurement system *DPA* [Accessed 2011-05-09]. Available from internet:

http://www.qfp-service.it/pdf/AICON_DPA_english_05-2010%5B1%5D.pdf

Digital photogrammetric system *Inpho* [Accessed 2011-04-28]. Available from internet:

http://www.inpho.de/index.php?seite=photogrammetric_systems

Digital photogrammetric system *PhotoMod* [Accessed 2011-01-24]. Available from internet:

http://www.infomap-rs.net/index.php?lang=en&tabid=51

Digital photogrammetric workstations [Accessed 2011-04-24]. Available from internet:

http://www.gim-international.com/issues/articles/id530-Digital_Photogrammetric_Workstations.html

Ground control points and aerial triangulation [Accessed 2011-04-28]. Available from internet:

http://www.pvts.net/pdfs/ortho/ortho_scp4.pdf

Program *PATB.* [Accessed 2011-04-26]. Available from internet:

http://www.k2-photogrammetry.de/products/patb.html

The accuracy of photogrammetric surveys [Accessed 2011-05-09]. Available from internet:

http://www.blm.gov/cadastral/Manual/73man/id33.htm

Triangulated irregular network (TIN) [Accessed 2011-02-03]. Available from internet:

http://en.wikipedia.org/wiki/Triangulated_irregular_network

APPENDIXES

Appendix 1. *PhotoMod* aerial triangulation report

```
== 2011 m. gegužės 17 d. == 08:58:11 ==
Отчет по уравниванию блока

--------------------------------------------------------------------------------
--------------------------------------------------------------------------------

Блок: VU_S3
Количество маршрутов: 1
Количество стереопар: 2

Параметры уравнивания:
  метод независимых маршрутов
  полиномиальные поправки: 2-го порядка, XY2
  система координат:  Cartesian Left
  вес уравнений на опорные точки:          1
  вес уравнений на связующие точки:          1
  используются поправки дрейфа центров GPS по маршрутам
Единицы измерения: m


--------------------------------------------------------------------------------
--------------------------------------------------------------------------------

Элементы внешнего ориентирования

--------------------------------------------------------------------------------
--------------------------------------------------------------------------------

Снимок: P912
центр проекции
            1.037072        -62.712047         81.077643
матрица поворота
         0.9801212734       0.0702928984       0.1855295066
        -0.0267664474       0.9734315563      -0.2274083608
        -0.1965854691       0.2179218064       0.9559624677
альфа, омега, каппа (град.)
       -10.9832059902      13.1445389733      -1.5750651602

--------------------------------------------------------------------------------

Снимок: P915
центр проекции
            1.249430        -68.732966         81.757177
матрица поворота
         0.9857994289       0.0739597295       0.1507628744
        -0.0429762619       0.9790039823      -0.1992592369
        -0.1623346137       0.1899504172       0.9682800794
альфа, омега, каппа (град.)
        -8.8499911615      11.4936445739      -2.5135531811

--------------------------------------------------------------------------------

Снимок: P918
центр проекции
            0.964182        -56.166147         79.841174
матрица поворота
         0.9735332144       0.0584419427       0.2209470972
        -0.0041481032       0.9711119898      -0.2385881314
        -0.2285079291       0.2313569592       0.9456522002
альфа, омега, каппа (град.)
```

```
      -13.1509671481     13.8032257161     -0.2447373327

--------------------------------------------------------------------------------
--------------------------------------------------------------------------------

Каталог точек

--------------------------------------------------------------------------------
--------------------------------------------------------------------------------

                  N              X              Y              Z          Exy          Ez
(m)

опорные

                102          9.824        -74.167         50.354        0.003       -0.004
                105          6.496        -70.721         49.527        0.001        0.007
                106          4.776        -68.223         48.909        0.002        0.004
                107         12.166        -62.236         48.021        0.001       -0.007
                109         13.703        -69.257         48.819        0.007        0.007
                110         15.980        -72.716         50.119        0.003       -0.005
                111         16.056        -65.708         48.418        0.002        0.004
                600          0.483        -75.332         50.715        0.002        0.004
                602          0.963        -67.368         48.887        0.005       -0.019
                603          0.212        -63.192         47.789        0.003        0.010
              итого  10 точек

контрольные

              итого  0 точек

сгущения

              итого  0 точек

связующие

                 *1         20.020        -70.451         47.898
                 *2         12.200        -75.850         51.283
                 *5          6.738        -67.674         49.077
                 *6          9.369        -68.980         49.053
                 *7          0.529        -68.199         48.990
                 *8          2.149        -62.758         47.714
                 *9         10.226        -62.823         47.667
               ~621         15.024        -68.415         31.516
              итого  8 точек


--------------------------------------------------------------------------------
--------------------------------------------------------------------------------

Оценка точности уравнивания блока
Превышения допусков отмечены знаком "*".

--------------------------------------------------------------------------------
--------------------------------------------------------------------------------

Сводная информация об ошибках по блоку

--------------------------------------------------------------------------------
--------------------------------------------------------------------------------

Ошибки по опорным точкам
```

N	Xcp-Xr	Ycp-Yr	Zcp-Zr	Exy (m)
допуск:	0.020	0.020	0.020	0.020
102	-0.003	-0.002	-0.004	0.003
105	0.001	-0.000	0.007	0.001
106	0.001	-0.001	0.004	0.002
107	0.001	-0.001	-0.007	0.001
109	0.001	0.007	0.007	0.007
110	0.002	-0.002	-0.005	0.003
111	-0.002	-0.002	0.004	0.002
600	0.001	0.002	0.004	0.002
602	-0.002	-0.004	-0.019	0.005
603	0.000	0.003	0.010	0.003
средний модуль:	0.001	0.002	0.007	0.003
СКО:	0.002	0.003	0.008	0.003
максимум:	0.003	0.007	0.019	0.007
всего точек (разностей):				
10 (	10	10	10	10)

центры проекции

N	Xcp-Xr	Ycp-Yr	Zcp-Zr	Exy (m)
допуск:	0.020	0.020	0.020	0.020
средний модуль:	0.000	0.000	0.000	0.000
СКО:	0.000	0.000	0.000	0.000
максимум:	0.000	0.000	0.000	0.000
всего точек (разностей):				
0 (	0	0	0	0)

Ошибки по контрольным точкам

N	Xcp-Xr	Ycp-Yr	Zcp-Zr	Exy (m)
допуск:	0.020	0.020	0.020	0.020
средний модуль:	0.000	0.000	0.000	0.000
СКО:	0.000	0.000	0.000	0.000
максимум:	0.000	0.000	0.000	0.000
всего точек (разностей):				
0 (	0	0	0	0)

центры проекции

N	Xcp-Xr	Ycp-Yr	Zcp-Zr	Exy (m)
допуск:	0.020	0.020	0.020	0.020
средний модуль:	0.000	0.000	0.000	0.000
СКО:	0.000	0.000	0.000	0.000
максимум:	0.000	0.000	0.000	0.000
всего точек (разностей):				
0 (	0	0	0	0)

Ошибки по связующим точкам (от среднего)

N	X-Xcp	Y-Ycp	Z-Zcp	Exy (m)
допуск:	0.020	0.020	0.020	0.020
средний модуль:	0.003	0.003	0.014	0.004
СКО:	0.003	0.003	0.016	0.004
максимум:	0.005	0.005	0.032*	0.007
всего точек (разностей):				
7 (	14	14	14	14)

внутри маршрутов

N	X-Xcp	Y-Ycp	Z-Zcp	Exy (m)
допуск:	0.020	0.020	0.020	0.020
средний модуль:	0.003	0.003	0.014	0.004
СКО:	0.003	0.003	0.016	0.004
максимум:	0.005	0.005	0.032*	0.007
всего точек (разностей):				
7 (	14	14	14	14)

между маршрутами

N	X-Xcp	Y-Ycp	Z-Zcp	Exy (m)
допуск:	0.020	0.020	0.020	0.020
средний модуль:	0.000	0.000	0.000	0.000
СКО:	0.000	0.000	0.000	0.000
максимум:	0.000	0.000	0.000	0.000
всего точек (разностей):				
0 (	0	0	0	0)

Ошибки по точкам сгущения (от среднего)

N	X-Xcp	Y-Ycp	Z-Zcp	Exy (m)
допуск:	0.020	0.020	0.020	0.020
средний модуль:	0.000	0.000	0.000	0.000
СКО:	0.000	0.000	0.000	0.000
максимум:	0.000	0.000	0.000	0.000
всего точек (разностей):				
0 (	0	0	0	0)

Ошибки по связи - центры проекции (от среднего)

N	X-Xcp	Y-Ycp	Z-Zcp	Exy (m)
допуск:	0.020	0.020	0.020	0.020
средний модуль:	0.000	0.000	0.000	0.000
СКО:	0.000	0.000	0.000	0.000
максимум:	0.000	0.000	0.000	0.000

```
  всего точек (разностей):
                  1 (            2               2               2               2)

-------------------------------------------------------------------------------

Ошибки по связующим точкам (на снимках)

                  N      x_пр-x_изм      y_пр-y_изм           Exy (мм)

            допуск:           4.699           4.699           4.699


     средний модуль:           0.256           0.510           0.638
                СКО:           0.404           0.728           0.832
           максимум:           1.453           2.518           2.519
  всего точек (разностей):
                 18 (            43              43              43)

-------------------------------------------------------------------------------

Ошибки по точкам сгущения (на снимках)

                  N      x_пр-x_изм      y_пр-y_изм           Exy (мм)

            допуск:           4.699           4.699           4.699


     средний модуль:           0.000           0.000           0.000
                СКО:           0.000           0.000           0.000
           максимум:           0.000           0.000           0.000
  всего точек (разностей):
                  0 (            0               0               0)

-------------------------------------------------------------------------------
-------------------------------------------------------------------------------

Детализированная информация об ошибках

-------------------------------------------------------------------------------
-------------------------------------------------------------------------------

Ошибки по опорным точкам

                  N            X-Xr            Y-Yr            Z-Zr          Exy (m)

            допуск:           0.020           0.020           0.020           0.020

102
          P915-P912          -0.003          -0.002          -0.004           0.003
105
          P912-P918           0.006          -0.003          -0.006           0.007
          P915-P912          -0.004           0.003           0.019           0.005
106
          P912-P918           0.002           0.000           0.008           0.002
          P915-P912           0.001          -0.002          -0.001           0.002
107
          P912-P918           0.001          -0.001          -0.007           0.001
109
          P912-P918           0.002           0.004          -0.007           0.005
          P915-P912          -0.001           0.011           0.020*          0.011
110
          P915-P912           0.002          -0.002          -0.005           0.003
111
          P912-P918           0.000          -0.003          -0.003           0.003
          P915-P912          -0.004          -0.000           0.012           0.004
```

```
600
          P915-P912          0.007          0.002          0.004          0.002
602
          P912-P918         -0.007          0.001          0.014          0.007
          P915-P912          0.003         -0.009         -0.051*         0.010
603
          P912-P918          0.000          0.003          0.010          0.003

центры проекции

                N           X-Xr           Y-Yr           Z-Zr          Exy (m)

           допуск:          0.020          0.020          0.020          0.020

-------------------------------------------------------------------------------

Ошибки по контрольным точкам

                N           X-Xr           Y-Yr           Z-Zr          Exy (m)

           допуск:          0.020          0.020          0.020          0.020

центры проекции

                N           X Xr           Y Yr           Z Zr          Exy (m)

           допуск:          0.020          0.020          0.020          0.020

-------------------------------------------------------------------------------

Ошибки по связующим точкам (от среднего)

                N         X Xcp          Y Ycp          Z Zcp          Exy (m)

           допуск:          0.020          0.020          0.020          0.020

*5
          P912-P918          0.002          0.002          0.013          0.003
          P915-P912         -0.002         -0.002         -0.013          0.003
*6
          P912-P918          0.005         -0.002         -0.011          0.005
          P915-P912         -0.005          0.002          0.011          0.005
105
          P912-P918          0.005         -0.003         -0.012          0.006
          P915 P912          0.005          0.003          0.012          0.006
106
          D912-D918          0.001          0.001          0.004          0.001
          P915-P912         -0.001         -0.001         -0.004          0.001
109
          P912-P918          0.002         -0.003         -0.014          0.004
          P915-P912         -0.002          0.003          0.014          0.004
111
          P912-P918          0.002         -0.001         -0.008          0.003
          D915-D912         -0.002          0.001          0.008          0.003
602
          P912-P918         -0.005          0.005          0.032*         0.007
          P915-P912          0.005         -0.005         -0.032*         0.007


Ошибки по точкам сгущения (от среднего)
```

N	X-Xcp	Y-Ycp	Z-Zcp	Exy (m)
допуск:	0.020	0.020	0.020	0.020

Ошибки по связи - центры проекции (от среднего)

N	X-Xcp	Y-Ycp	Z-Zcp	Exy (m)
допуск:	0.020	0.020	0.020	0.020
P912				
P912-P918	0.000	0.000	0.000	0.000
P915-P912	0.000	0.000	0.000	0.000

Ошибки по связующим точкам (на снимках)

N	x пр-х изм	y пр-у изм	Exy (мм)
допуск:	4.699	4.699	4.699
*1			
P912	0.201	0.140	0.245
P918	-0.483	-0.492	0.689
*2			
P912	-0.034	0.974	0.974
P915	-0.230	-0.198	0.303
*5			
P912	-0.011	1.019	1.019
P915	0.571	0.751	0.944
P918	-0.575	0.318	0.657
*6			
P912	0.006	0.555	0.555
P915	0.439	-0.310	0.538
P910	0.432	0.251	0.500
*7			
P912	-0.159	0.090	0.183
P918	0.264	0.185	0.323
*8			
P912	0.124	0.029	0.127
P918	0.187	0.445	0.483
*9			
P912	0.044	-0.019	0.048
P918	-0.143	-0.375	0.401
-621			
P912	-0.023	1.090	1.091
P915	-0.145	0.153	0.211
102			
P912	-0.010	1.033	1.033
P915	0.120	0.100	0.161
105			
P912	-0.008	0.768	0.768
P915	0.614	-0.561	0.832
P918	0.681	0.074	0.685
106			
P912	-0.014	0.390	0.391
P915	-0.145	-0.120	0.189
P918	-0.073	0.670	0.674
107			
P912	0.005	0.027	0.009
P918	-0.229	0.328	0.400

109				
	P912	0.035	-0.651	0.652
	P915	0.347	0.903	0.967
	P918	0.240	-0.023	0.241
110				
	P912	-0.055	-2.518	2.519
	P915	-0.388	-0.058	0.392
111				
	P912	0.044	-0.237	0.241
	P915	0.026	0.556	0.556
	P918	-0.144	-0.057	0.155
600				
	P912	0.101	-1.164	1.168
	P915	0.323	-0.154	0.358
602				
	P912	-0.018	-1.166	1.166
	P915	-1.453	1.460	2.060
	P918	-1.359	-1.489	2.016
603				
	P912	-0.167	-0.019	0.168
	P918	0.277	0.015	0.277

Ошибки по точкам сгущения (на снимках)

N	x_пр-x_изм	y_пр-y_изм	Exy (мм)
допуск:	4.699	4.699	4.699

Appendix 2. *Inpho* aerial triangulation statistics file of the images which are corrected from the digital camera *Canon EOS 1D Mark III* objective distortions

```
                                Statistic file-pries kalibravima

MATCH-AT statistic file
-----------------------

Project          : V:\dar vienas\Kopie von Kopie von Kopie von 22.prj

Date of creation : Sun May 22 15:47:21 2011

1. Summary:
   -------
       sigma 0 in micron                    0.5

       number block points                   18
       number of images                       3

       number of iteration                    5
       redundandancy                         50

       mean std dev ground  x             0.004 [units of terrain system]
                            y             0.004 [units of terrain system]
                            z             0.008 [units of terrain system]

       mean std dev ori   omega             62.5 [mgrd]
                          phi               79.2 [mgrd]
                          kapp              24.0 [mgrd]

       mean std dev ori     x             0.040 [units of terrain system]
                            y             0.032 [units of terrain system]
                            z             0.018 [units of terrain system]

       rms image points     x             0.000 [micron]
                            y             0.000 [micron]

       rms control in image x             1.257 [micron]
                            y             1.089 [micron]

       rms control in terr  x             0.006 [units of terrain system]
                            y             0.008 [units of terrain system]
                            z             0.008 [units of terrain system]

       max res. control     x             0.016 [units of terrain system]
                            y            -0.021 [units of terrain system]
                            z            -0.017 [units of terrain system]

       rms check points     x             0.000 [units of terrain system]
                            y             0.000 [units of terrain system]
                            z             0.000 [units of terrain system]

       max res. check       x             0.000 [units of terrain system]
                            y             0.000 [units of terrain system]
                            z             0.000 [units of terrain system]


 2. Estimated orientation parameters and standard deviations:
   ----------------------------------------------------------

     photo ID         omega[grd]   phi[grd]    kappa[grd]        X              Y
     Z      std.ome[mgrd]     std.phi[mgrd]   std.kappa[mgrd]       std.X      std.Y
std.Z

                P915  12.235810  10.082963    -4.751286         -68.499          1.594
    81.877      61.526          77.707          22.714             0.040      0.031
0.015
                P912  14.822668  12.709091    -4.704093         -62.274          1.072
    81.006      60.255          77.442          23.275             0.039      0.031
0.017
                P918  15.686157  14.885071    -3.950543         -55.754          0.983
    79.849      65.804          82.394          26.146             0.041      0.034
0.022


 3. GNSS observations and resuduals:
    -------------------------------
```

Statistic file-pries kalibravima

photo ID	X	Y	Z	res x	res y	res z
P915 no GNSS observation given						
P912 no GNSS observation given						
P918 no GNSS observation given						

4. Adjusted coordinates including control/check points and standandard deviations:

fold	point ID check	blund	x given x	y given y	z given z	sx res x	sy res y	sz res z	code
			102 -74.161	9.829	50.356	0.004	0.004	0.007	
6	2	0	0 -74.165	9.827	50.358	-0.004	-0.002	0.002	
			105 -70.719	6.497	49.520	0.003	0.003	0.005	
6	3	0	0 -70.721	6.495	49.520	-0.002	-0.002	-0.000	
			106 -68.223	4.776	48.903	0.003	0.003	0.005	
6	3	0	0 -68.222	4.775	48.905	0.001	-0.001	0.002	
			107 -62.237	12.155	48.038	0.004	0.004	0.007	
6	2	0	0 -62.235	12.165	48.028	0.002	0.010	-0.010	
			109 -69.280	13.723	48.829	0.003	0.004	0.006	
6	3	0	0 -69.264	13.702	48.812	0.016	-0.021	-0.017	
			110 -72.712	15.979	50.118	0.004	0.005	0.007	
6	2	0	0 -72.716	15.986	50.124	-0.004	0.007	0.006	
			111 -65.704	16.051	48.400	0.004	0.004	0.006	
6	3	0	0 -65.706	16.058	48.414	-0.002	0.007	0.014	
			600 -75.337	0.482	50.713	0.005	0.004	0.007	
6	2	0	0 -75.334	0.482	50.711	0.003	-0.000	-0.002	
			602 -67.360	0.962	48.906	0.004	0.004	0.006	
6	3	0	0 -67.364	0.965	48.906	-0.004	0.003	0.000	
			603 -63.190	0.211	47.774	0.005	0.004	0.007	
6	2	0	0 -63.195	0.212	47.779	-0.005	0.001	0.005	
			901 -75.658	1.059	50.785	0.006	0.004	0.014	
5	2	0	0			-999999986991104.000			
-999999986991104.000 -999999986991104.000									
			902 -70.828	1.181	49.534	0.004	0.004	0.008	
5	3	0	0			-999999986991104.000			
-999999986991104.000 -999999986991104.000									
			903 -67.548	1.062	48.891	0.004	0.004	0.008	
5	3	0	0			-999999986991104.000			
-999999986991104.000 -999999986991104.000									
			904 -62.782	1.041	47.647	0.005	0.004	0.014	
5	2	0	0			-999999986991104.000			
-999999986991104.000 -999999986991104.000									
			905 -67.802	6.652	48.843	0.003	0.003	0.007	
5	3	0	0			-999999986991104.000			
-999999986991104.000 -999999986991104.000									
			906 -68.984	9.367	49.047	0.003	0.003	0.007	
5	3	0	0			-999999986991104.000			
-999999986991104.000 -999999986991104.000									
			908 -75.607	12.126	50.916	0.006	0.006	0.014	
5	2	0	0			-999999986991104.000			
-999999986991104.000 -999999986991104.000									
			909 -70.370	20.005	47.926	0.006	0.009	0.011	
5	3	0	0			-999999986991104.000			
-999999986991104.000 -999999986991104.000									

3. Photo observations and residuals:

photo	point	status	fold	automa	x	vx	y	vy
P918	107	1	2	0	1897.1	3.9	4694.4	1.7
P912	107	1	2	0	9951.1	-3.7	5502.6	-1.3
P918	111	1	3	0	-3122.1	-2.9	9738.7	-1.8
P912	109	1	3	0	-642.2	3.2	7069.3	0.8
P912	905	1	3	0	1826.8	-2.3	-2935.1	1.8

Statistic file-pries kalibravima

	P915	109	1	3	0	6309.8	-1.8	8738.5
-2.1								
	P918	905	1	3	0	-6532.1	1.1	-3549.4
-2.2								
	P912	906	1	3	0	-125.8	1.7	1043.5
1.5								
	P912	111	1	3	0	4449.5	2.1	10535.8
0.9								
	P912	600	1	2	0	-10375.5	0.2	-13045.6
-2.0								
	P915	600	1	2	0	-2335.7	-0.1	-11714.6
2.0								
	P918	602	1	3	0	-6147.8	0.1	-12454.4
-1.9								
	P915	110	1	2	0	870.8	0.3	12063.1
1.7								
	P915	906	1	3	0	7186.1	-0.9	2611.7
-1.5								
	P912	602	1	3	0	2820.1	-0.5	-11895.0
1.5								
	P915	111	1	3	0	11358.6	0.5	12272.1
1.4								
	P912	110	1	2	0	-5996.8	-0.6	10318.0
-1.3								
	P918	603	1	2	0	738.9	-1.3	-13664.5
0.4								
	P918	902	1	3	0	-11653.6	-0.1	-12122.9
1.4								
	P915	905	1	3	0	9326.0	1.1	-1386.8
0.4								
	P912	105	1	3	0	-2777.2	-0.8	-3274.3
-0.9								
	P912	603	1	2	0	9753.7	1.0	-12942.1
-0.3								
	P915	902	1	3	0	5099.9	-0.1	-10209.6
-1.0								
	P918	105	1	3	0	-11083.4	0.4	-3812.5
0.8								
	P918	906	1	3	0	-8187.4	-0.8	412.3
-0.0								
	P912	901	1	2	0	-10890.2	0.0	-12103.0
0.8								
	P915	901	1	2	0	-2905.7	-0.0	-10774.1
-0.8								
	P918	106	1	3	0	-7251.9	-0.2	-6417.6
0.7								
	P915	106	1	3	0	8888.7	0.4	-4304.7
-0.5								
	P915	909	1	3	0	4274.1	0.0	16400.8
-0.5								
	P915	602	1	3	0	10755.9	0.1	-10319.5
0.5								
	P912	102	1	2	0	-8207.5	-0.5	1589.5
-0.2								
	P912	903	1	3	0	2519.4	0.1	-11736.8
-0.5								
	P912	902	1	3	0	-2833.9	0.3	-11685.1
-0.4								
	P918	904	1	2	0	1403.5	0.0	-12298.4
0.4								
	P912	904	1	2	0	10326.8	0.0	-11560.2
-0.4								
	P912	909	1	3	0	-2007.8	-0.0	14521.2
0.4								
	P915	105	1	3	0	4756.0	0.3	-1778.1
-0.0								
	P915	903	1	3	0	10436.0	-0.0	-10168.8
0.2								
	P918	903	1	3	0	-6416.8	-0.0	-12294.7
0.2								
	P912	106	1	3	0	1263.1	-0.1	-5836.8
-0.2								
	P915	102	1	2	0	-946.3	0.2	3109.8
0.0								
	P918	909	1	3	0	-8838.9	0.0	13712.8
0.2								
	P918	109	1	3	0	-8245.7	-0.1	6363.4

```
                              Statistic file-pries kalibravima
-0.1
                P912        908       1       2       0    -10529.1        -0.0      4955.7
-0.0
                P915        908       1       2       0     -3422.6         0.0      6543.0
0.0

 End of MATCH-AT statistic file
```

Appendix 3. *Inpho* aerial triangulation report of the images which are corrected from the digital camera *Canon EOS 1D Mark III* objective distortions

aat-pries kalibravima

```
Start Post Processing: Sun May 22 15:47:21 2011
================================================

Active Block                                                : complete Block
Number of photos                                            : 3
Number of strips                                            : 1

Photo scale                                                 : 1:635
Mean terrain height [m]                                     : 50

Automatic blunder detection                                 : OFF


Use all adjusted points in project file
as control (absolute mode)                                  : OFF


Control parameter for block adjustment :
----------------------------------------

Selfcalibration                                             : OFF
GNSS-Mode                                                   : OFF
Drift-Mode                                                  : OFF
IMU-Mode                                                    : OFF
Earth's curvature correction                                : OFF
Atmospheric correction                                      : ON
Do not eliminate manual points                              : OFF

Standard deviations (a-priori) :
--------------------------------


Ground control (planimetry) [m]

    Set
     0 (=default)                                           :  0.020


Ground control (height) [m]

    Set
     0 (=default)                                           :  0.020


Automatic image points [mm]

    Set
     0 (=default)                                           :  0.001


Image points of ground control and manual measurements [mm]    :  0.006


Used Cameras in block:
----------------------

  1 CanonEOS1DMarkIII
      Distortion                                            : Coefficients


Tie Point Generator
-------------------


created    15 observations for photo                  P915
created    18 observations for photo                  P912
created    13 observations for photo                  P918

total of 46 measurements in 3 photos are used for adjustment (total 3 photos)
```

aat-pries kalibravima

```
sigma naught      336.2 micron (15:47:55)
sigma naught      106.8 micron (15:48:00)
sigma naught        1.0 micron (15:48:06)
sigma naught        0.5 micron (15:48:10)


found          8 points connecting   2 photos
found         10 points connecting   3 photos


number of observations         122
number of unknowns              72
redundancy                      50


RMS automatic points in photo (number: 0)
        x           0.0 micron
        y           0.0 micron

RMS   control and manual points in photo (number: 46)
        x           1.3 micron
        y           1.1 micron


RMS control points with default standard deviation set (number: 10)
        x         0.006 [meter]
        y         0.008 [meter]

RMS control points  with default standard deviation set (number: 10)
        z         0.008 [meter]

sigma naught        0.5 micron (15:48:16)
standard deviations of exterior orientation parameters (px, py, pz in [meter]
omega,phi,kappa in [deg/1000] )
```

photo ID	px	py	pz	omega	phi	kappa
P912	0.039	0.031	0.017	54.2298	69.6976	20.9474
P915	0.040	0.031	0.015	55.3733	69.9365	20.4430
P918	0.041	0.034	0.022	59.2233	74.1548	23.5311

```
mean standard deviations of rotations
        omega       56.3 [deg/1000]
        phi         71.3 [deg/1000]
        kappa       21.6 [deg/1000]

max  standard deviations of rotations
        omega       59.2 [deg/1000] at photo              P918
        phi         74.2 [deg/1000] at photo              P918
        kappa       23.5 [deg/1000] at photo              P918

mean standard deviations of translations
        x         0.040 [meter]
        y         0.032 [meter]
        z         0.018 [meter]

max  standard deviations of translations
        x         0.041 [meter] at photo                P918
        y         0.034 [meter] at photo                P918
        z         0.022 [meter] at photo                P918


residuals  horizontal control points in [meter]
```

control point ID	rx	ry
102	-0.004	-0.002
105	-0.002	-0.002
106	0.001	-0.001
107	0.002	0.010
109	0.016	-0.021
110	-0.004	0.007
111	-0.002	0.007
600	0.003	-0.000
602	-0.004	0.003

```
                                aat-pries kalibravima
                    603           -0.005                0.001


  residuals  vertical control points in [meter]

               control point ID        rz

                       102           0.002
                       105          -0.000
                       106           0.002
                       107          -0.010
                       109          -0.017
                       110           0.006
                       111           0.014
                       600          -0.002
                       602           0.000
                       603           0.005


  max  standard deviations of terrain points
          x          0.006 [meter] at point                  901
          y          0.009 [meter] at point                  909
          z          0.014 [meter] at point                  904

  mean standard deviations of terrain points
          x          0.004
          y          0.004
          z          0.008


  exterior orientation parameters (px, py, pz in [meter] omega,phi,kappa in [deg] )
  rotations from terrain to photo (rotated axes)

               photo ID       px           py           pz       omega      phi      kappa

                 P912      -62.274        1.072       81.006    13.3404   11.4382    -4.2337
                 P915      -68.499        1.594       81.877    11.0122    9.0747    -4.2762
                 P918      -55.754        0.983       79.849    14.1175   13.3966    -3.5555

 ============================================================================


  WARNING: Suspect orientation angle(s) (>  4.50000 [deg]) in following photo(s):
                photo      omega        phi       kappa

                 P912    13.34040    11.43818    -4.23368
                 P915    11.01223     9.07467    -4.27616
                 P918    14.11754    13.39656    -3.55549


  WARNING: Suspect standard deviation for orientation angle(s) (> 27.00000 [deg/1000]) in
following photo(s):
                photo      omega        phi       kappa

                 P912    54.22984    69.69759    20.94739
                 P915    55.37330    69.93648    20.44304
                 P918    59.22329    74.15477    23.53113


  Sigma naught :     0.5 [micron] =     0.1 [pixel in level 0]

  Elapsed time = 0 hour 1 min. 7 sec.

  End of Post Processing: Sun May 22 15:48:26 2011
```

Appendix 4. *Inpho* aerial triangulation statistics file of the original images

```
                                Statistic file-po kalibravimo

 MATCH-AT statistic file
 -----------------------

 Project          : V:\GERULIS PRJ po kalibravimo\Kopie von Kopie von Kopie von Kopie von
Kopie von 22.prj

 Date of creation : Sun May 22 16:39:17 2011

 1. Summary:
    -------
        sigma 0 in micron                    0.5

        number block points                   18
        number of images                       3

        number of iteration                    3
        redundandancy                         50

        mean std dev ground  x             0.004 [units of terrain system]
                             y             0.004 [units of terrain system]
                             z             0.007 [units of terrain system]

        mean std dev ori  omega              55.5 [mgrd]
                          phi                70.1 [mgrd]
                          kapp               21.4 [mgrd]

        mean std dev ori     x             0.035 [units of terrain system]
                             y             0.028 [units of terrain system]
                             z             0.016 [units of terrain system]

        rms image points     x             0.000 [micron]
                             y             0.000 [micron]

        rms control in image x             0.838 [micron]
                             y             1.201 [micron]

        rms control in terr  x             0.006 [units of terrain system]
                             y             0.009 [units of terrain system]
                             z             0.004 [units of terrain system]

        max res. control     x             0.016 [units of terrain system]
                             y            -0.025 [units of terrain system]
                             z            -0.011 [units of terrain system]

        rms check points     x             0.000 [units of terrain system]
                             y             0.000 [units of terrain system]
                             z             0.000 [units of terrain system]

        max res. check       x             0.000 [units of terrain system]
                             y             0.000 [units of terrain system]
                             z             0.000 [units of terrain system]


 2. Estimated orientation parameters and standard deviations:
   ----------------------------------------------------------

     photo ID         omega[grd]  phi[grd]   kappa[grd]        X              Y
     Z     std.ome[mgrd]    std.phi[mgrd]   std.kappa[mgrd]       std.X      std.Y
std.Z

               P915  12.431744  10.399697    -4.774838         -68.493          1.502
    81.496     54.600          68.866          20.251             0.035      0.028
0.014
               P912  14.969854  12.806504    -4.712475         -62.398          1.015
    80.637     53.532          68.532          20.736             0.034      0.027
0.015
               P918  15.882515  14.875309    -3.981950         -55.951          0.905
    79.479     58.385          72.877          23.269             0.036      0.030
0.019


 3. GNSS observations and resuduals:
    -------------------------------
```

Statistic file-po kalibravimo

photo ID	X	Y	Z	res x	res y	res z
P915 no GNSS observation given						
P912 no GNSS observation given						
P918 no GNSS observation given						

4. Adjusted coordinates including control/check points and standandard deviations:

fold	point ID check	blund	x given x	y given y	z given z	sx res x	sy res y	sz res z	code
		102	-74.158	9.826	50.358	0.003	0.003	0.006	
6	2	0	-74.165	9.827	50.358	-0.007	0.001	0.000	
		105	-70.717	6.493	49.518	0.003	0.003	0.005	
6	3	0	-70.721	6.495	49.520	-0.004	0.002	0.002	
		106	-68.224	4.773	48.904	0.003	0.003	0.005	
6	3	0	-68.222	4.775	48.905	0.002	0.002	0.001	
		107	-62.240	12.154	48.028	0.003	0.004	0.006	
6	2	0	-62.235	12.165	48.028	0.005	0.011	0.000	
		109	-69.280	13.727	48.823	0.003	0.003	0.005	
6	3	0	-69.264	13.702	48.812	0.016	-0.025	-0.011	
		110	-72.712	15.985	50.119	0.004	0.004	0.006	
6	2	0	-72.716	15.986	50.124	-0.004	0.001	0.005	
		111	-65.702	16.056	48.411	0.004	0.004	0.006	
6	3	0	-65.706	16.058	48.414	-0.004	0.002	0.003	
		600	-75.331	0.478	50.710	0.004	0.004	0.006	
6	2	0	-75.334	0.482	50.711	-0.003	0.004	0.001	
		602	-67.363	0.963	48.905	0.003	0.003	0.005	
6	3	0	-67.364	0.965	48.906	-0.001	0.002	0.001	
		603	-63.196	0.213	47.782	0.004	0.004	0.006	
6	2	0	-63.195	0.212	47.779	0.001	-0.001	-0.003	
		901	-75.646	1.051	50.812	0.006	0.004	0.012	
5	2	0	0			-999999986991104.000			
-999999986991104.000	-999999986991104.000								
		902	-70.825	1.179	49.532	0.004	0.003	0.007	
5	3	0	0			-999999986991104.000			
-999999986991104.000	-999999986991104.000								
		903	-67.549	1.061	48.889	0.003	0.003	0.007	
5	3	0	0			-999999986991104.000			
-999999986991104.000	-999999986991104.000								
		904	-62.788	1.042	47.662	0.004	0.004	0.012	
5	2	0	0			-999999986991104.000			
-999999986991104.000	-999999986991104.000								
		905	-67.804	6.649	48.849	0.003	0.003	0.006	
5	3	0	0			-999999986991104.000			
-999999986991104.000	-999999986991104.000								
		906	-68.985	9.365	49.049	0.003	0.003	0.006	
5	3	0	0			-999999986991104.000			
-999999986991104.000	-999999986991104.000								
		908	-75.604	12.118	50.931	0.005	0.005	0.012	
5	2	0	0			-999999986991104.000			
-999999986991104.000	-999999986991104.000								
		909	-70.373	20.036	47.931	0.005	0.008	0.010	
5	3	0	0			-999999986991104.000			
-999999986991104.000	-999999986991104.000								

3. Photo observations and residuals:

photo	point	status	fold	automa	x	vx	y	vy
P918	903	1	3	0	-6272.5	-1.1	-12193.8	-3.0
P912	903	1	3	0	2673.7	2.0	-11663.9	1.9
P912	603	1	2	0	9878.4	-0.7	-12801.1	-2.2
P918	603	1	2	0	885.8	0.8	-13569.8	2.1
P918	109	1	3	0	-8131.0	-0.7	6498.2	

Statistic file-po kalibravimo

-2.1	P912	902	1	3	0	-2691.2	-1.7	-11609.4
-1.3	P912	110	1	2	0	-5862.0	-1.2	10455.6
-1.7	P915	110	1	2	0	1021.9	0.8	12197.2
1.8	P912	909	1	3	0	-1864.2	-1.8	14621.0
0.7	P915	102	1	2	0	-803.2	-0.8	3252.1
-1.8	P912	109	1	3	0	-493.9	1.8	7229.7
-0.5	P915	909	1	3	0	4400.7	0.9	16450.1
-1.6	P912	102	1	2	0	-8114.9	0.4	1708.6
1.8	P918	106	1	3	0	-7146.4	0.2	-6350.0
1.6	P915	903	1	3	0	10583.8	-1.0	-10060.2
1.1	P918	111	1	3	0	-2989.1	-1.1	9892.8
-1.0	P918	909	1	3	0	-8672.8	0.9	13782.1
1.0	P915	106	1	3	0	9086.6	0.5	-4221.7
-1.2	P918	902	1	3	0	-11478.0	0.9	-11982.7
1.0	P918	904	1	2	0	1554.0	-0.0	-12220.3
-1.3	P912	904	1	2	0	10457.1	-0.0	-11437.2
1.3	P912	111	1	3	0	4613.4	1.2	10678.6
0.3	P918	107	1	2	0	2073.7	1.1	4841.5
0.4	P918	905	1	3	0	-6437.7	-0.2	-3470.3
-1.2	P912	906	1	3	0	22.6	1.2	1163.9
-0.2	P918	906	1	3	0	-8099.9	-0.6	521.6
1.0	P918	105	1	3	0	-10970.9	-0.5	-3719.6
0.9	P915	906	1	3	0	7389.1	-0.6	2736.9
-0.8	P915	109	1	3	0	6484.3	-0.1	8872.5
1.0	P915	111	1	3	0	11475.4	-0.5	12343.1
0.8	P912	905	1	3	0	1991.1	0.3	-2856.7
0.9	P912	602	1	3	0	2973.8	-0.5	-11812.3
-0.8	P915	902	1	3	0	5266.0	0.9	-10139.7
0.3	P912	107	1	2	0	10127.9	-0.9	5618.2
0.3	P912	908	1	2	0	-10419.4	-0.0	5080.9
-0.8	P915	908	1	2	0	-3300.1	0.0	6697.1
0.7	P912	106	1	3	0	1425.0	-0.6	-5783.2
-0.2	P912	901	1	2	0	-10728.9	0.0	-11970.9
0.7	P915	901	1	2	0	-2771.5	-0.0	-10712.2
-0.7	P915	602	1	3	0	10895.7	0.4	-10203.4
0.5	P912	105	1	3	0	-2652.9	0.5	-3201.3
-0.3	P915	105	1	3	0	4955.2	-0.2	-1688.6
-0.5	P918	602	1	3	0	-6006.5	0.1	-12356.1
0.4								

```
                                Statistic file-po kalibravimo
                P915        905       1       3       0      9530.7        -0.2     -1287.1
0.3
                P915        600       1       2       0     -2198.2        -0.1    -11638.3
0.1
                P912        600       1       2       0    -10201.7        -0.0    -12903.2
0.1

 End of MATCH-AT statistic file
```

Appendix 5. *Inpho* aerial triangulation report of the original images

```
                                aat-po kalibravimo


Start Post Processing: Sun May 22 16:39:18 2011
===============================================

Active Block                                                  : complete Block
Number of photos                                              : 3
Number of strips                                              : 1

Photo scale                                                   : 1:609
Mean terrain height [m]                                       : 50

Automatic blunder detection                                   : OFF


Use all adjusted points in project file
as control (absolute mode)                                    : OFF


Control parameter for block adjustment :
----------------------------------------

Selfcalibration                                               : OFF
GNSS-Mode                                                     : OFF
Drift-Mode                                                    : OFF
IMU-Mode                                                      : OFF
Earth's curvature correction                                  : OFF
Atmospheric correction                                        : ON
Do not eliminate manual points                                : OFF

Standard deviations (a-priori) :
--------------------------------


Ground control (planimetry) [m]

    Set
     0 (=default)                                             :  0.020


Ground control (height) [m]

    Set
     0 (=default)                                             :  0.020


Automatic image points [mm]

    Set
     0 (=default)                                             :  0.001


Image points of ground control and manual measurements [mm]   :  0.006


Used Cameras in block:
----------------------

  1 CanonEOS1DMarkIII
      Distortion                                              : Coefficients


Tie Point Generator
-------------------


created    15 observations for photo                 P915
created    18 observations for photo                 P912
created    13 observations for photo                 P918


total of 46 measurements in 3 photos are used for adjustment (total 3 photos)
```

```
                                    aat-po kalibravimo
sigma naught        0.5 micron (16:39:39)
sigma naught        0.5 micron (16:39:42)


found          8 points connecting   2 photos
found         10 points connecting   3 photos


number of observations         122
number of unknowns              72
redundancy                      50


RMS automatic points in photo (number: 0)
        x           0.0 micron
        y           0.0 micron

RMS   control and manual points in photo (number: 46)
        x           0.8 micron
        y           1.2 micron


RMS control points with default standard deviation set (number: 10)
        x         0.006 [meter]
        y         0.009 [meter]

RMS control points  with default standard deviation set (number: 10)
        z         0.004 [meter]

sigma naught        0.5 micron (16:39:46)
standard deviations of exterior orientation parameters (px, py, pz in [meter]
omega,phi,kappa in [deg/1000] )

              photo ID       px           py           pz       omega      phi      kappa

                P912        0.034        0.027        0.015   48.1791   61.6792   18.6625
                P915        0.035        0.028        0.014   49.1402   61.9796   18.2262
                P918        0.036        0.030        0.019   52.5466   65.5897   20.9421

mean standard deviations of rotations
        omega       50.0 [deg/1000]
        phi         63.1 [deg/1000]
        kappa       19.3 [deg/1000]

max  standard deviations of rotations
        omega       52.5 [deg/1000] at photo                P918
        phi         65.6 [deg/1000] at photo                P918
        kappa       20.9 [deg/1000] at photo                P918

mean standard deviations of translations
        x         0.035 [meter]
        y         0.028 [meter]
        z         0.016 [meter]

max  standard deviations of translations
        x         0.036 [meter] at photo                P918
        y         0.030 [meter] at photo                P918
        z         0.019 [meter] at photo                P918


residuals  horizontal control points in [meter]

             control point ID        rx                ry

                    102           -0.007             0.001
                    105           -0.004             0.002
                    106            0.002             0.002
                    107            0.005             0.011
                    109            0.016            -0.025
                    110           -0.004             0.001
                    111           -0.004             0.002
                    600           -0.003             0.004
                    602           -0.001             0.002
                    603            0.001            -0.001
```

aat-po kalibravimo

residuals vertical control points in [meter]

control point ID	rz
102	0.000
105	0.002
106	0.001
107	0.000
109	-0.011
110	0.005
111	0.003
600	0.001
602	0.001
603	-0.003

max standard deviations of terrain points

x	0.006 [meter]	at point	901
y	0.008 [meter]	at point	909
z	0.012 [meter]	at point	901

mean standard deviations of terrain points

x	0.004
y	0.004
z	0.007

exterior orientation parameters (px, py, pz in [meter] omega,phi,kappa in [deg])
rotations from terrain to photo (rotated axes)

photo ID	px	py	pz	omega	phi	kappa
P912	-62.398	1.015	80.637	13.4729	11.5259	-4.2412
P915	-68.493	1.502	81.496	11.1886	9.3597	-4.2974
P918	-55.951	0.905	79.479	14.2943	13.3878	-3.5838

==========

WARNING: Suspect orientation angle(s) (> 4.50000 [deg]) in following photo(s):

photo	omega	phi	kappa
P912	13.47287	11.52585	-4.24123
P915	11.18857	9.35973	-4.29735
P918	14.29426	13.38778	-3.58375

WARNING: Suspect standard deviation for orientation angle(s) (> 27.00000 [deg/1000]) in following photo(s):

photo	omega	phi	kappa
P912	48.17914	61.67922	18.66254
P915	49.14019	61.97964	18.22622
P918	52.54662	65.58971	20.94213

Sigma naught : 0.5 [micron] = 0.1 [pixel in level 0]

Elapsed time = 0 hour 0 min. 39 sec.

End of Post Processing: Sun May 22 16:39:54 2011

Appendix 6. *BLUH* bundle triangulation report of the images which are corrected from the digital camera *Canon EOS 1D Mark III* objective distortions

```
                                bluh-pries kalibravima.lst

================================================================================

PROGRAM  BLUH     LEIBNIZ UNIVERSITY HANNOVER          JUL 2010

          -----   BUNDLE BLOCK ADJUSTMENT   -----

           INSTITUTE OF PHOTOGRAMMETRY AND GEOINFORMATION

DATE: 22.05.2011   19:33:07
==============================

VERSION FUER HS NEUBRANDENBURG FROM L.UNI.HANNOVER

TEXT

default
================================================================================


DAXYZ
daxyz.dat


DAPOR
dapor.dat


BLUINF
bluinf.dat


DABLUH
dabluh.dat


NUMBER OF PHOTOS     GPS    GPSWXY     GPSWZ        GPS ANTENNA OFFSET
               3       0      .300      .300      .000      .000      .000   3.

CALIBRATED FOCAL LENGTH 660
  50.758

 MAXI  IW     GW(1)     GW(2)     GW(3) IB    FEG REC.SCALE ABIT IOUT APPR IFR
   10   1     1.000     1.000        1.0  0   20.0        0.  .81    0    0   0

         FROM PT        TO POINT    WEIGHT    AD PAR   WARNING         OUTSIDE
               0               0     1.000         0       50. 99999999999999

    . SYSIM LIST
   0     0    Y

      REA       REB       REC      REC2    IMAR    IMA2
     .050      5.00      4.40      3.00       0       0                      N

APRIORI STANDARD DEVIATIONS: CONTROL POINTS SX = SY =     1.000
                                           SZ =     1.000
                           PHOTO COORDINATES Sy = Sx =       1.0

     IPPP       IPU     IFILT    NGPSIT    NGPSHI    IEROUT     ISTAR
        3        18         7         0         0         1         3

PHOTO NUMBER LIST
      915  1       912  1       918  1



               0         0

CONTROL POINTS

            POINT            X            Y            Z   FSP   FSZ
              102       -74.165        9.827       50.358   .02   .02
              105       -70.721        6.495       49.520   .02   .02
```

```
                              bluh-pries kalibravima.lst
               106       -68.222          4.775         48.905    .02    .02
               107       -62.235         12.165         48.028    .02    .02
               109       -69.264         13.702         48.812    .02    .02
               110       -72.716         15.986         50.124    .02    .02
               111       -65.706         16.058         48.414    .02    .02
               600       -75.334           .482         50.711    .02    .02
               602       -67.364           .965         48.906    .02    .02
               603       -63.195           .212         47.779    .02    .02

RANGE OF PHOTO COORDINATES
 X MINIMUM =  -11.654  X MAXIMUM =   11.359
 Y MINIMUM =  -13.665  Y MAXIMUM =   16.401
 R MAXIMUM =   20.119  FACTOR =   8.08172

UP TO     18 POINTS / PHOTO

    10 X,Y-CONTROL:    .137    .057   10 Z-CONTROL:   1.291


NO.ITER   MS CORR X        MS CORR Y        MS CORR Z   SIGMA 0 (ITER)  TIME
                         [ground unit]                      [microns]
================================================================================

  0      .885213E-01      .114311E+00      .775095E+00        48.9    19:33:07

    10 X,Y-CONTROL:    .171    .118   10 Z-CONTROL:    .354
  1      .110633E+00      .480971E-01      .409258E+00        24.3    19:33:07

                  MEAN  HEIGHT
CAMERA PROJECTION CENTER  TERRAIN   PHOTO SCALE
   1            81.        49.         630.  FOR [ft]:    192.     16. inch/ft

MAIN KAPPA FOR DATA SET   1 :   -1.602         3    3

    10 X,Y-CONTROL:    .007    .011   10 Z-CONTROL:    .022
  2      .117667E+00      .730071E-01      .216426E+00         1.6    19:33:07

    10 X,Y-CONTROL:    .006    .010   10 Z-CONTROL:    .020
  3      .361015E-02      .276170E-02      .484955E-02         1.4    19:33:07

    10 X,Y-CONTROL:    .006    .010   10 Z-CONTROL:    .020
  4      .145749E-04      .176711E-04      .396784E-04         1.4    19:33:07

STANDARD DEVIATIONS OF PHOTO ORIENTATIONS
-----------------------------------------
    PHOTO        SPHI     SOMEGA     SKAPPA          SX         SY         SZ
      918      .00280     .00252     .01331        .023       .021       .015
      912      .00115     .00060     .00450        .010       .006       .004
      915      .00101     .00052     .00399        .012       .003       .004

     PHOTO ORIENTATION   [GRADS]  SEQUENCE OF ROTATION: PHI, OMEGA, KAPPA
    ================================================================================
    PHOTO      PHI     OMEGA     KAPPA       EASTING     NORTHING      HEIGHT

      915  10.2262  12.1016   -2.7999       -68.522        1.584      81.870
      912  12.9964  14.5412   -1.7172       -62.303        1.063      81.006
      918  15.2827  15.2650    -.2458       -55.780         .976      79.854

PHOTO ORIENTATIONS IN ROTATION SEQUENCE  OMEGA, PHI, KAPPA [GRADS]
STORED IN DAPORO.DAT

PHOTO ORIENTATIONS IN PAT-B-FORMAT STORED IN DAPORP.DAT


BLUH ORIENTATIONS WITH ROTATION SEQUENCE PHI OMEGA KAPPA [GRADS]
STORED IN dapor.dat


default
================================================================================

ADJUSTED COORDINATES     ERROR LIMIT FOR LISTING RESIDUALS  20.00 MICRONS
====================
```

```
                              bluh-pries kalibravima.lst
      POINT NAME        EASTING        NORTHING         HEIGHT        PHOTOS/POINT
    D.I.:     IMAGE        Dx [microns] Dy    P ROB.E.     Dx EAST    Dy NORTH      DATASNO MAX
                 DCP: DIFFERENCE AT OBJECT COORDS. OF CONTROL POINTS    SWEIGHT
    - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

             102        -74.161          9.829         50.349             2 BASE       6.30
                DCPXY     -.004          -.002                 CP          102   50.000

                DCPZ                                     .009 CZ          102

             105        -70.720          6.497         49.519             3
                DCPXY     -.001          -.002                 CP          105   50.000

                DCPZ                                     .001 CZ          105

             106        -68.224          4.776         48.902             3
                DCPXY      .002          -.001                 CP          106   50.000

                DCPZ                                     .003 CZ          106

             109        -69.279         13.721         48.833             3
                DCPXY      .015          -.019                 CP          109   50.000

                DCPZ                                    -.021 CZ          109

             110        -72.712         15.980         50.112             2 BASE       6.30
                DCPXY     -.004           .006                 CP          110   50.000

                DCPZ                                     .012 CZ          110

             111        -65.704         16.053         48.398             3
                DCPXY     -.002           .005                 CP          111   50.000

                DCPZ                                     .016 CZ          111

             600        -75.337           .483         50.709             2 BASE       6.30
                DCPXY      .003          -.001                 CP          600   50.000

                DCPZ                                     .002 CZ          600

             602        -67.361           .962         48.905             3
                DCPXY     -.003           .003                 CP          602   50.000

                DCPZ                                     .001 CZ          602

             901        -75.659          1.060         50.779             2 BASE       6.30
             902        -70.828          1.181         49.531             3
             903        -67.549          1.062         48.890             3
             905        -67.802          6.652         48.843             3
             906        -68.984          9.367         49.047             3
             908        -75.608         12.126         50.911             2 BASE       6.30
             909        -70.368         20.004         47.928             3
             107        -62.234         12.145         48.071             2 BASE       6.62
                DCPXY     -.001           .020                 CP          107   50.000

                DCPZ                                    -.043 CZ          107

             603        -63.191           .211         47.768             2 BASE       6.62
                DCPXY     -.004           .001                 CP          603   50.000

                DCPZ                                     .011 CZ          603

             904        -62.782          1.041         47.649             2 BASE       6.62

================================================================================

ROOT MEAN SQUARE OF DIFFERENCES AT CONTROL POINTS    FOR UNIT WEIGHT
  10 HORIZONTAL CONTROL POINTS   RMSE X = +/-   .006     +/-   .303
                                 RMSE Y = +/-   .010     +/-   .524
  10 VERTICAL CONTROL POINTS     RMSE Z = +/-   .020     +/- 1.017
                                        [ground units]


MEAN DIFFERENCE AT CONTROL POINTS:
  X:     .000     Y:     .000      Z:     .000 [ground units]

AVERAGE BASE FOR 2-RAY-POINTS:         6.43
```

bluh-pries kalibravima.lst

MEAN SQUARE ERRORS POINT CODE		NO IN GROUP	NO PHOT PTS	[microns] INT MSE X	INT MSE Y
CPZ	1	10	25	1.31	.51
CPXY	2	10	25	1.09	.54
ADJUS	4	18	46	.76	1.09
MEAN				1.01	.84

MEAN SQUARE CORRECTIONS OF LAST ITERATION
X: .0030 Y: .0057 Z: .0151 [ground units]

OBSERVATIONS	UNKNOWNS	REDUNDANCE	SIGMA 0 [microns]	
			=======	
122	72	50	1.36	19:33:07

++++++ APRIORI STANDARD DEVIATIONS SHOULD BE CHANGED IN BLIM TO: ++++++
SIGMA0 APRIORI : 1.
CONTROL POINTS X,Y: .43 Z: 1.02
++

MEAN VALUES OF RESIDUALS AND MSE IN RADIAL COMPONENTS
1ST LINE RADIUS [CM]
2ND LINE MEAN RADIAL [MICRONS]
3RD LINE MSE RADIAL [MICRONS]
4TH LINE MSE TANGENTIAL [MICRONS]
5TH LINE NUMBER OF POINTS IN GROUP

DATA SET 1

.0	.1	.2	.4	.5	.6	.7	.9	1.0	1.1	1.2	1.4	1.5	1.6	1.7
.0	.2	.0	.0	.0	.0	.0	.1	.0	.0	-.1	.1	.0	.0	.0
.0	.2	.0	.2	.0	.0	.1	.1	.1	.2	.1	.1	.1	.0	.1
.0	.2	.0	.1	.0	.0	.2	.0	.1	.2	.0	.1	.0	.1	.1
0	1	0	4	3	3	5	1	13	10	5	4	5	1	5

MSE (RADIAL) = +/- .1 MSE (TANGENTIAL) = +/- .1 60 PHOTO POINTS

MEAN SQUARE NADIR ANGLE : 19.0

MEAN PHOTO SCALE = 1: 656.1 3 PHOTOS
FOR [ft]: 1: 200. = 17. in/ft

ADJUSTED COORDINATES COMPUTED : DATE: 22.05.2011 19:33:07
==========

default

POINT NAME	EASTING	NORTHING	HEIGHT	RAYS	Type	Class
102	-74.161	9.829	50.349	2	Control	XYZ
105	-70.720	6.497	49.519	3	Control	XYZ
106	-68.224	4.776	48.902	3	Control	XYZ
107	-62.234	12.145	48.071	2	Control	XYZ
109	-69.279	13.721	48.833	3	Control	XYZ
110	-72.712	15.980	50.112	2	Control	XYZ
111	-65.704	16.053	48.398	3	Control	XYZ
600	-75.337	.483	50.709	2	Control	XYZ
602	-67.361	.962	48.905	3	Control	XYZ
603	-63.191	.211	47.768	2	Control	XYZ
901	-75.659	1.060	50.779	2		
902	-70.828	1.181	49.531	3		
903	-67.549	1.062	48.890	3		
904	-62.782	1.041	47.649	2		
905	-67.802	6.652	48.843	3		
906	-68.984	9.367	49.047	3		
908	-75.608	12.126	50.911	2		

```
                              bluh-pries kalibravima.lst
              909       -70.368         20.004         47.928     3

POINT COORDINATES STORED IN daxyz.dat


DATA FOR TRANSFER TO BLAN STORED IN bluinf.dat


OUTPUT FILES
------------
OBJECT COORDINATES          : daxyz.dat

ORIENTATIONS PHI OMEGA KAPPA: dapor.dat

ORIENTATIONS OMEGA PHI KAPPA: daporo.dat
ORIENTATIONS PAT-B-FORMAT   : daporp.dat
RESIDUALS AT IMAGE POSITIONS: resi.dat
DATA FOR TRANSFER TO BLAN   : bluinf.dat



END OF BLUH   DATE: 22.05.2011   19:33:07
```

Appendix 7. *BLUH* bundle triangulation report of the original images

```
                                bluh-po kalibravimo.lst

================================================================================

PROGRAM  BLUH     LEIBNIZ UNIVERSITY HANNOVER          JUL 2010

          -----   BUNDLE BLOCK ADJUSTMENT   -----

           INSTITUTE OF PHOTOGRAMMETRY AND GEOINFORMATION

DATE: 23.05.2011   17:48:57
==============================

VERSION FUER HS NEUBRANDENBURG FROM L.UNI.HANNOVER

TEXT

default
================================================================================


DAXYZ
daxyz.dat


DAPOR
dapor.dat


BLUINF
bluinf.dat


DABLUH
dabluh.dat


NUMBER OF PHOTOS     GPS    GPSWXY     GPSWZ        GPS ANTENNA OFFSET
               3       0      .300      .300      .000      .000      .000   3.

CALIBRATED FOCAL LENGTH 660
  50.793

 MAXI   IW     GW(1)     GW(2)     GW(3) IB     FEG REC.SCALE ABIT IOUT APPR IFR
   10    1     1.000     1.000       1.0  0    20.0         0.   .81    0    0   0

         FROM PT        TO POINT     WEIGHT     AD PAR    WARNING         OUTSIDE
               0               0     1.000          0       50. 99999999999999

    . SYSIM LIST
   0     0    Y

      REA       REB       REC      REC2     IMAR     IMA2
     .050      5.00      4.40      3.00        0        0                      N

APRIORI STANDARD DEVIATIONS: CONTROL POINTS SX = SY =     1.000
                                           SZ =     1.000
                            PHOTO COORDINATES Sy = Sx =       1.0

     IPPP       IPU     IFILT    NGPSIT    NGPSHI    IEROUT     ISTAR
        3        18         7         0         0         1         3

PHOTO NUMBER LIST
      915  1       912  1       918  1



               0         0

CONTROL POINTS

            POINT             X             Y             Z   FSP   FSZ
              102       -74.165         9.827        50.358   .02   .02
              105       -70.721         6.495        49.520   .02   .02
```

```
                                bluh-po kalibravimo.lst
              106       -68.222          4.775        48.905    .02    .02
              107       -62.235         12.165        48.028    .02    .02
              109       -69.264         13.702        48.812    .02    .02
              110       -72.716         15.986        50.124    .02    .02
              111       -65.706         16.058        48.414    .02    .02
              600       -75.334           .482        50.711    .02    .02
              602       -67.364           .965        48.906    .02    .02
              603       -63.195           .212        47.779    .02    .02

RANGE OF PHOTO COORDINATES
 X MINIMUM =  -11.478  X MAXIMUM =   11.675
 Y MINIMUM =  -13.570  Y MAXIMUM =   16.450
 R MAXIMUM =   20.059  FACTOR =   8.10622

UP TO     18 POINTS / PHOTO

    10 X,Y-CONTROL:    .159    .061   10 Z-CONTROL:   1.014


NO.ITER   MS CORR X        MS CORR Y        MS CORR Z   SIGMA 0 (ITER)  TIME
                          [ground unit]                     [microns]
================================================================================

  0      .971177E-01      .954997E-01      .598418E+00        46.6    17:48:57

    10 X,Y-CONTROL:    .118    .064   10 Z-CONTROL:    .169
  1      .488001E-01      .116911E-01      .381980E+00        17.2    17:48:57

                   MEAN  HEIGHT
CAMERA PROJECTION CENTER  TERRAIN   PHOTO SCALE
   1            81.        49.         633.  FOR [ft]:    193.     16. inch/ft

MAIN KAPPA FOR DATA SET   1 :   -1.584         3    3

    10 X,Y-CONTROL:    .044    .030   10 Z-CONTROL:    .119
  2      .739378E-01      .372847E-01      .114805E+00         1.4    17:48:57

    10 X,Y-CONTROL:    .044    .030   10 Z-CONTROL:    .119
  3      .171855E-02      .524448E-03      .246304E-02         1.4    17:48:57

STANDARD DEVIATIONS OF PHOTO ORIENTATIONS
-----------------------------------------
    PHOTO        SPHI     SOMEGA     SKAPPA          SX         SY         SZ
      918      .00276     .00222     .01670        .029       .028       .019
      912      .00186     .00064     .00485        .013       .003       .009
      915      .00108     .00065     .00318        .012       .008       .007

     PHOTO ORIENTATION   [GRADS]  SEQUENCE OF ROTATION: PHI, OMEGA, KAPPA
    ================================================================================
    PHOTO       PHI     OMEGA      KAPPA       EASTING     NORTHING       HEIGHT

      915   10.0067   12.4416    -3.0728       -69.753        2.395       82.060
      912   12.5729   14.2980    -1.7183       -62.561        2.161       81.319
      918   16.9407   15.9781     .0621        -54.964        2.118       79.850

PHOTO ORIENTATIONS IN ROTATION SEQUENCE  OMEGA, PHI, KAPPA [GRADS]
STORED IN DAPORO.DAT

PHOTO ORIENTATIONS IN PAT-B-FORMAT STORED IN DAPORP.DAT


BLUH ORIENTATIONS WITH ROTATION SEQUENCE PHI OMEGA KAPPA [GRADS]
STORED IN dapor.dat


default
================================================================================

ADJUSTED COORDINATES     ERROR LIMIT FOR LISTING RESIDUALS  20.00 MICRONS
====================


       POINT NAME       EASTING      NORTHING        HEIGHT      PHOTOS/POINT
     D.I.:     IMAGE       Dx [microns] Dy   P ROB.E.    Dx EAST   Dy NORTH     DATASNO MAX
                 DCP: DIFFERENCE AT OBJECT COORDS. OF CONTROL POINTS   SWEIGHT
```

bluh-po kalibravimo.lst

102	-74.175	9.841	50.364	2 BASE	7.23
DCPXY	.010	-.014	CP	102	50.000
DCPZ			-.006 CZ	102	
105	-70.715	6.493	49.540	3	
DCPXY	-.007	.002	CP	105	50.000
DCPZ			-.020 CZ	105	
106	-68.200	4.764	48.914	3	
DCPXY	-.022	.011	CP	106	50.000
DCPZ			-.009 CZ	106	
109	-69.259	13.691	48.822	3	
DCPXY	-.005	.011	CP	109	50.000
DCPZ			-.010 CZ	109	
110	-72.721	15.974	50.106	2 BASE	7.23
DCPXY	.005	.012	CP	110	50.000
DCPZ			.018 CZ	110	
111	-65.711	16.035	48.401	3	
DCPXY	.005	.023	CP	111	50.000
DCPZ			.013 CZ	111	
600	-75.337	.499	50.690	2 BASE	7.23
DCPXY	.003	-.017	CP	600	50.000
DCPZ			.021 CZ	600	
602	-67.358	.959	48.900	3	
DCPXY	-.006	.006	CP	602	50.000
DCPZ			.006 CZ	602	
901	-75.645	1.051	50.811	2 BASE	7.23
902	-70.825	1.174	49.532	3	
903	-67.544	1.061	48.889	3	
905	-67.802	6.644	48.850	3	
906	-68.987	9.364	49.050	3	
908	-75.603	12.115	50.930	2 BASE	7.23
909	-70.372	20.039	47.935	3	
107	-62.228	12.180	48.019	2 BASE	7.74
DCPXY	-.007	-.015	CP	107	50.000
DCPZ			.009 CZ	107	
603	-63.180	.218	47.760	2 BASE	7.74
DCPXY	-.015	-.006	CP	603	50.000
DCPZ			.019 CZ	603	
904	-62.788	1.042	47.661	2 BASE	7.74

ROOT MEAN SQUARE OF DIFFERENCES AT CONTROL POINTS FOR UNIT WEIGHT

10 HORIZONTAL CONTROL POINTS	RMSE X = +/- .008	+/- .215
	RMSE Y = +/- .020	+/- .490
10 VERTICAL CONTROL POINTS	RMSE Z = +/- .002	+/- 1.926

[ground units]

MEAN DIFFERENCE AT CONTROL POINTS:
X: .000 Y: .000 Z: .000 [ground units]

AVERAGE BASE FOR 2-RAY-POINTS: 7.43

MEAN SQUARE ERRORS [microns]

bluh-po kalibravimo.lst

POINT CODE	NO IN GROUP	NO PHOT PTS	INT MSE X	INT MSE Y
CPZ 1	10	25	2.01	.73
CPXY 2	10	25	1.67	.20
ADJUS 4	18	46	.85	1.20
MEAN			1.58	.72

MEAN SQUARE CORRECTIONS OF LAST ITERATION
X: .0030 Y: .0068 Z: .0164 [ground units]

OBSERVATIONS	UNKNOWNS	REDUNDANCE	SIGMA O	
			=======	
122	72	50	1.36	17:48:57
			[microns]	

++++++ APRIORI STANDARD DEVIATIONS SHOULD BE CHANGED IN BLIM TO: ++++++
SIGMA0 APRIORI : 7.
CONTROL POINTS X,Y: .49 Z: 1.03
++

MEAN VALUES OF RESIDUALS AND MSE IN RADIAL COMPONENTS
1ST LINE RADIUS [CM]
2ND LINE MEAN RADIAL [MICRONS]
3RD LINE MSE RADIAL [MICRONS]
4TH LINE MSE TANGENTIAL [MICRONS]
5TH LINE NUMBER OF POINTS IN GROUP

DATA SET 1

.0	.1	.2	.4	.5	.6	.7	.9	1.0	1.1	1.2	1.4	1.5	1.6	1.7
.0	.4	.0	.0	.0	-.0	.3	.1	.0	.1	-.6	.3	.4	.3	.1
.0	.4	.0	.4	.0	.0	.1	.1	.6	.5	.6	.4	.6	.4	.7
.0	.1	.0	.3	.0	.2	.2	.0	.7	.5	.1	.5	.4	.4	.6
0	1	0	4	3	3	5	1	13	10	5	4	5	2	4

MSE (RADIAL) = +/- .1 MSE (TANGENTIAL) = +/- .1 60 PHOTO POINTS

MEAN SQUARE NADIR ANGLE : 17.6

MEAN PHOTO SCALE = 1: 655.1 3 PHOTOS
FOR [ft]: 1: 200. = 17. in/ft

ADJUSTED COORDINATES COMPUTED : DATE: 23.05.2011 17:48:57
==========

default

POINT NAME	EASTING	NORTHING	HEIGHT	RAYS	Type	Class
102	-74.175	9.841	50.364	2	Control	XYZ
105	-70.714	6.493	49.540	3	Control	XYZ
106	-68.200	4.764	48.914	3	Control	XYZ
107	-62.228	12.180	48.019	2	Control	XYZ
109	-69.259	13.691	48.822	3	Control	XYZ
110	-72.721	15.974	50.106	2	Control	XYZ
111	-65.711	16.035	48.401	3	Control	XYZ
600	-75.337	.499	50.690	2	Control	XYZ
602	-67.358	.959	48.900	3	Control	XYZ
603	-63.180	.218	47.760	2	Control	XYZ
901	-75.645	1.051	50.811	2		
902	-70.825	1.174	49.532	3		
903	-67.544	1.061	48.889	3		
904	-62.788	1.042	47.661	2		
905	-67.802	6.644	48.850	3		
906	-68.987	9.364	49.050	3		
908	-75.603	12.115	50.930	2		
909	-70.372	20.039	47.935	3		

```
                                  bluh-po kalibravimo.lst
POINT COORDINATES STORED IN daxyz.dat


DATA FOR TRANSFER TO BLAN STORED IN bluinf.dat



OUTPUT FILES
------------
OBJECT COORDINATES          : daxyz.dat

ORIENTATIONS PHI OMEGA KAPPA: dapor.dat

ORIENTATIONS OMEGA PHI KAPPA: daporo.dat
ORIENTATIONS PAT-B-FORMAT   : daporp.dat
RESIDUALS AT IMAGE POSITIONS: resi.dat
DATA FOR TRANSFER TO BLAN   : bluinf.dat



END OF BLUH   DATE: 23.05.2011   17:48:57
```

Appendix 8. The programme of Republican scientific conference *"Civil Engineering and Geodesy"*

RESPUBLIKINĖS MOKSLO KONFERENCIJOS "CIVILINĖ INŽINERIJA IR GEODEZIJA" 2010 spalio 22 d.

DIENOTVARKĖ
Mokslo komiteto pirmininkas
doc. dr. V. Č. Aksamitauskas
Mokslo komiteto sekretorius prof. dr. M. Burinskienė
Organizacinio komiteto pirmininkas – doc., dr. G. Paliulis
Sekretorius – doc., dr. A. Gasilionis

GEODEZIJOS SEKCIJA

1 posėdis 10.00 – 11.30 2709 a.

1. Č. Aksamitauskas. Stasiui Vytautui Kazakevičiui 80 m.
2. J. Vaitkevičienė, A. Kumetaitienė. Žemės sklypų kadastrinių matavimų tikrinimo ir derinimo kokybės įvertinimas.
3. L. Papšienė, G. Beconytė. Lietuvos erdvinės informacijos infrastruktūros vystymo prielaidos.
4. D. Levinskaitė, A. Stanionis, A. Zakarevičius. Žemės plutos įtempių pokyčių kaita Lietuvos teritorijoje.
5. I. Jonauskienė. Žemės sklypų kokybės tyrimas.
6. R. Birvydienė. Sunkio anomalijos ir jų nustatymo Lietuvos teritorijoje galimybės.
7. J. Sužiedelytė-Visockienė, R. Bagdžiūnaitė. VGTU personalo Erasmus programos įgyvendinimas ir mobilumo rezultatai.
8. J. Pavliukovič, B. Ruzgienė. Skaitmeninės programinės sistemos geoduomenims gauti.
9. J. Sužiedelytė-Visockienė, A. Pranskevičiūtė. Pastatų matavimai skaitmeninės fotogrametrijos metodu.
10. D. Sabaitis. Apskritiminių skalių tipai ir jų matavimo būdai.
11. D. Popovas. Sunkio lauko kitimo poveikis geodeziniams matavimams.

2 posėdis. 11.45 – 13.15

12. J. Tropikaitė. Nekilnojamųjų turto daiktų kadastrinių matavimų kokybės kontrolė.
13. B. Gaidamovič. Refrakcijos įtakos tyrimas pagal Lietuvos geodezinio vertikaliojo tinklo niveliavimo duomenis.
14. G. Kostygova. Žemės sklypo plano sudarymas CAD programine įranga.
15. A. Zubanov. Šilo tilto deformacijų analizė.
16. G. Dmitrijev. Automatizuoto komparatoriaus valdymo principai ir algoritmai.
17. G. Sriubė. Melioracijos projektų susiejimas su LKS–94 koordinačių sistema.
18. R. Uleckaitė. Išmatuotų Žemės plutos deformacijų rodiklių tikslumo tyrimas modeliavimo būdu.
19. E. Penšina. Laiko sistemų taikomų geodezinėje astronomijoje analizė.
20. A. Šilkaitė. Žemės poliaus judėjimo poveikis astronominėms koordinatėms.
21. R. Gaidytė. 2D ir 3D statinių modeliavimo ypatumai.
22. A. Savickis. Virtualiųjų GPS referencinių stočių tinklo taikant koordinačių korektūrą sudarymas.
23. S. Norkutė, R. Putrimas. Vertikaliojo tinklo linijos Jonava-Zarasai niveliavimo rezultatų analizė.
24. E. Dagilytė, V. Budrytė. Žemės dangos skaitmeninių vaizdų koreliacinė analizė.

3 posėdis. 13.45 – 15.15

25. E. Videiko. Senųjų žemėlapių susiejimas ir transformavimas į bendrąją sistemą.
26. M. Mankauskas. Sunkio vertikaliojo gradiento tyrimas.
27. E. Zalanskaitė. Jonosferos įtakos GPS matavimams analizė.
28. E. Žilius. Vertikaliųjų Žemės plutos judesių įtaka horizontaliesiems judesiams.
29. V. Stukaitė. Melioracijos rekonstrukcijos projekto geodezinių darbų analizė.
30. V. Nareiko. ArcGIS programinės įrangos uždavinių automatizavimo analizė.
31. O. Čepaitė. Gravimetrinių matavimų duomenų apdorojimo analizė.
32. A. Gelžinytė. Vertikaliųjų Žemės plutos judesių linijoje Jonava-Kybartai prognozavimo modeliai.
33. A. Lingytė. Namų ūkio ūkininko sodybos plėtros projekto geodezinių darbų aspektai.
34. T. Gintvainytė. Telšių rajono žemės sklypų registravimo nekilnojamojo turto registre analizė.
35. I. Šapola. Vilniaus miesto nekilnojamojo turto objektų verčių analizė taikant „ArcGIS".
36. P. Timinskas. Vilniaus urėdijos geoinformacinės sistemos projektavimas.
37. V. Bondzinskas. Skaitmeninės topografinės nuotraukos sudarymas atliekant statybos projektavimo darbus.
38. A. Žutautas. Palydovinių sistemų apžvalga.
39. D. Volungevičiūtė. Pataisos, redukuojant atstumus į LKS-94 kartografinę projekciją.
40. E. Butkutė. Skirtingose koordinačių sistemose sudarytų žemėlapių palyginimas.

Diskusijos

VILNIAUS GEDIMINO TECHNIKOS UNIVERSITETAS
APLINKOS INŽINERIJOS FAKULTETAS

CIVILINĖ INŽINERIJA IR GEODEZIJA

RESPUBLIKINĖS MOKSLO KONFERENCIJOS

PROGRAMA

2010 M. SPALIO 22 D.